

FEATURES

- Fix input unregulated single and dual output
- Continuous short-circuit protection.
- Industry standard pin-out
- I/O isolation test voltage 3KVDC
- No-load input current as low as 5mA
- Operating temperature range - 40°C to +105°C
- High efficiency up to 85%
- IEC62368, UL62368, EN62368 approved

RS PRO 1W isolated DC-DC converters

- 2233682, 2233683, 2233685, 2233686,
- 2233692, 2233693, 2233694, 2233695



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Isolated DC-DC converters

Product Description

PCB Mount DC-DC converters are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits. Featuring continuous short circuit protection and no-load input current as low as 5mA

General Specifications

Model	DC-DC 1W Isolated (3KV) DC-DC converter
Mounting Type	PCB
MTBF	MIL-HDBK-217F@25°C > 3,500,000 hrs
Applications	Industrial control systems, instrumentation, analogue, relay-driven and data switching circuits.

RS Stock#	Input Voltage (Vdc)		Output Voltage	Output Current	Wattage	Max. Capacitive Load(μF)	Efficiency (Typ)
	Nominal	Max					
2233682	5V (4.5-5.5)		±5V	±100/±10mA	1W	1200	80%
2233683			±12V	±42/±5mA	1W	220	81%
2233685			±15V	±34/±4mA	1W	220	81%
2233686			±24V	±21/±2mA	1W	100	80%
2233692			5V	200/20mA	1W	2400	80%
2233693			12V	84/9mA	1W	560	80%
2233694			15V	67/7mA	1W	560	81%
2233695			24V	42/5mA	1W	220	81%

Input Specifications

Input Specification						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	12VDC input	5VDC output	-	270/5	286/10	mA
		12VDC output		241/12	254/20	
		15VDC/24VDC output		241/18	254/30	
Reflected Ripple Current			-	15	-	
Surge Voltage (1sec. max.)	12VDC input		-0.7	-	18	VDC
Input Filter			Capacitance Filter			
Hot Plug			Unavailable			

Output Specifications

Output Specification						
Item	Operating Conditions	Min	Typ.	Max	Unit	
Voltage Accuracy		See output regulation curves (Fig. 1)				
Linear Regulation	Input voltage change: $\pm 1\%$	-	-	± 1.2	%	
Load Regulation	10% -100% load	5VDC output	-	10		15
		12VDC output	-	7		10
		15VDC output	-	6		10
		24VDC output		5	10	
Temperature Coefficient	100% load	-	± 0.02	-	%/ $^{\circ}\text{C}$	
Ripple & Noise *	20MHz bandwidth	Others	-	30	75	mV p-p
		24VDC output		50	100	
Short circuit Protection		Continuous, self-recovery				
Note: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions	Min	Typ	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	3000	-	-	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	-	-	M Ω
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V		20		pF
Operating Temperature	See Fig. 1	-40	-	+105	$^{\circ}\text{C}$
Storage Temperature		-55	-	+125	
Case Temperature Rise	Ta=25 $^{\circ}\text{C}$	-	15	-	
Storage Humidity	Non-condensing	-	-	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	-	-	300	$^{\circ}\text{C}$
Switching Frequency *	Full load, nominal input voltage	-	270	-	KHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$		3500		K hours

Typical Performance Curves






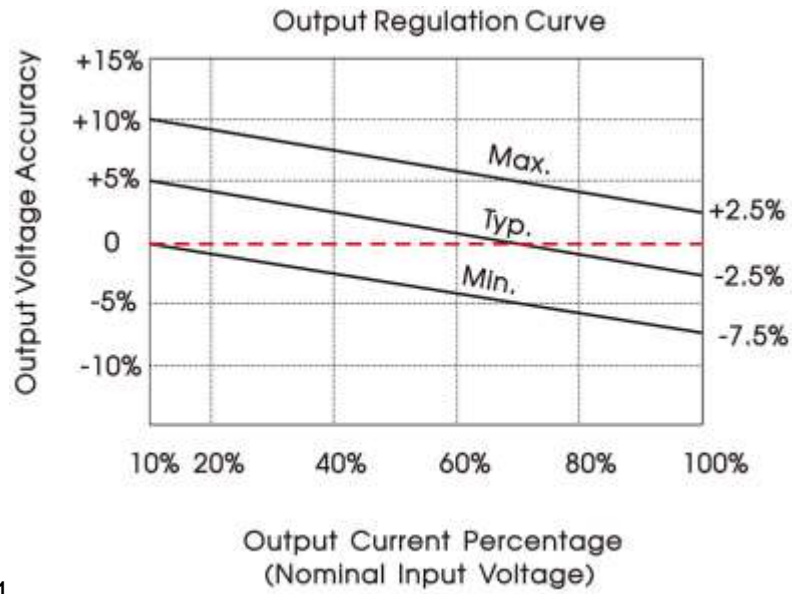


Fig 1

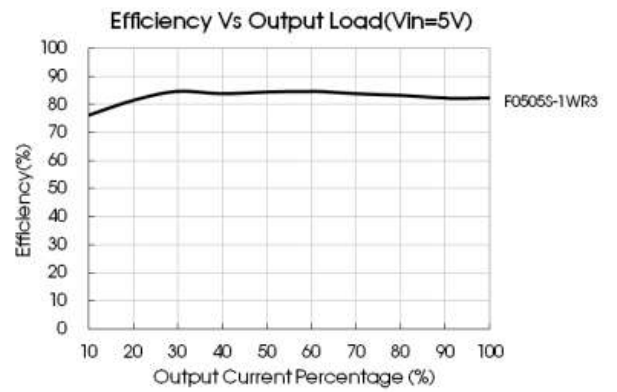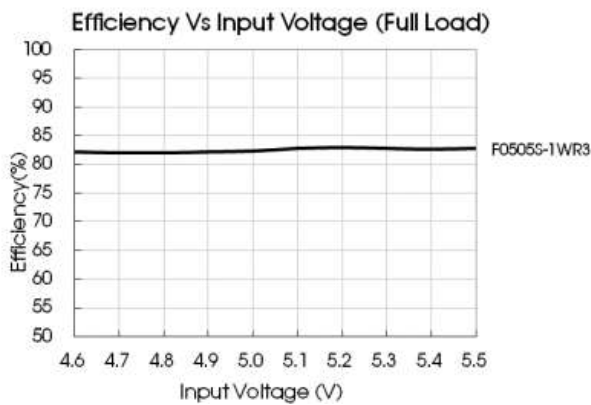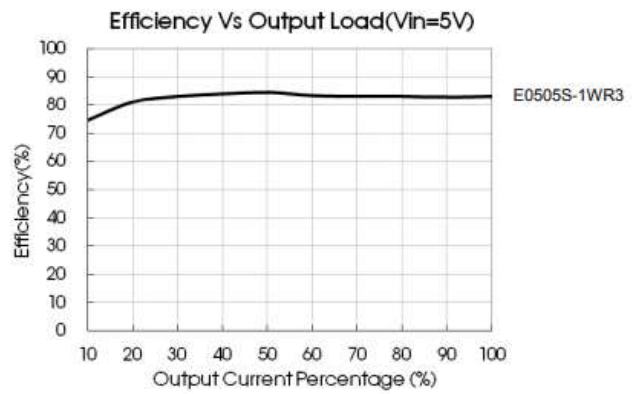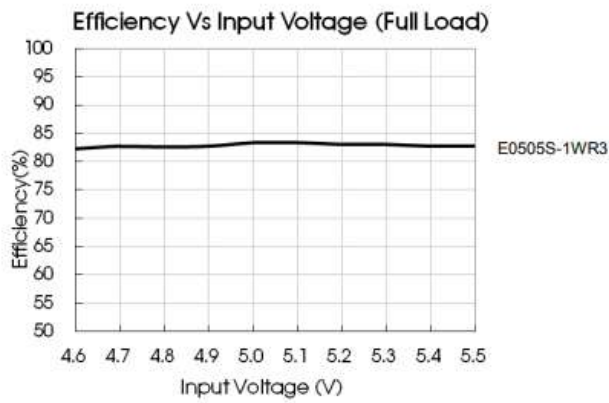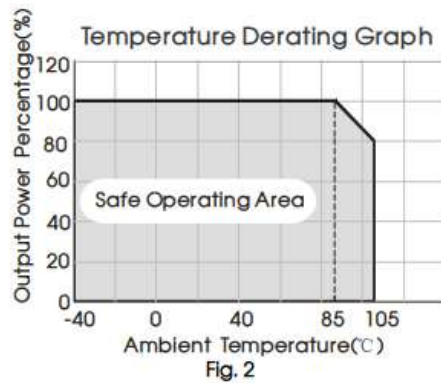

Design Reference

Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3. Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1

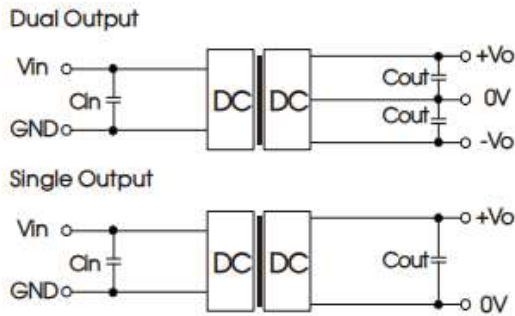


Fig. 3

Recommended capacitive load value table (Table 1)

Vin (VDC)	Cin (µF)	Single output (VDC)	Cout (µF)	Dual output (VDC)	Cout (µF)
5	4.7	3.3/5	10	±3.3/±5	4.7
--	--	9/12	2.2	±9/±12	1
--	--	15/24	1	±15/±24	0.47

EMC (Class B) compliance circuit

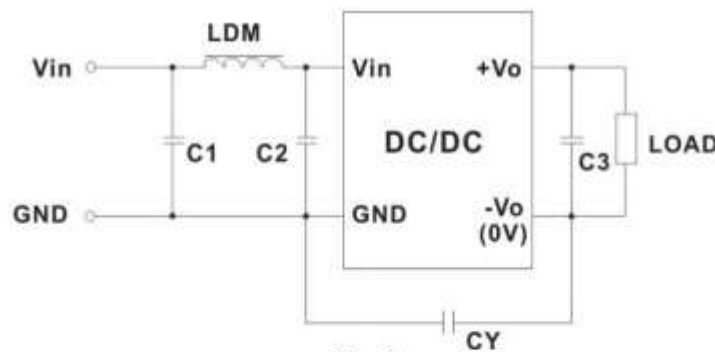


Fig. 4

EMC recommended circuit value table (Table 2)

Input voltage 5VDC	EMI	Output voltage (VDC)	3.3/5/9	12/15/24
		C1/C2	4.7µF /25V	4.7µF /25V
		CY	--	1nF/4KVDC VISHAY HGZ102MBP TDK CD45-E2GA102M-GKA
		C3	Refer to the Cout in table 1	
		LDM	6.8µH	6.8µH

Note: In the case of actual use, the requirements for EMI are high, it is subject to CY (CY:1nF/4KV).

EMC Specifications




Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)	
	RE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV	Perf. Criteria B
Note: Refer to Fig.4 for recommended circuit test			

Mechanical Specifications

Case material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	19.65 x 6.00 x 10.16mm
Weight	2.1g (Typ.)
Cooling Method	Free air convection

Dimensions and recommended layout

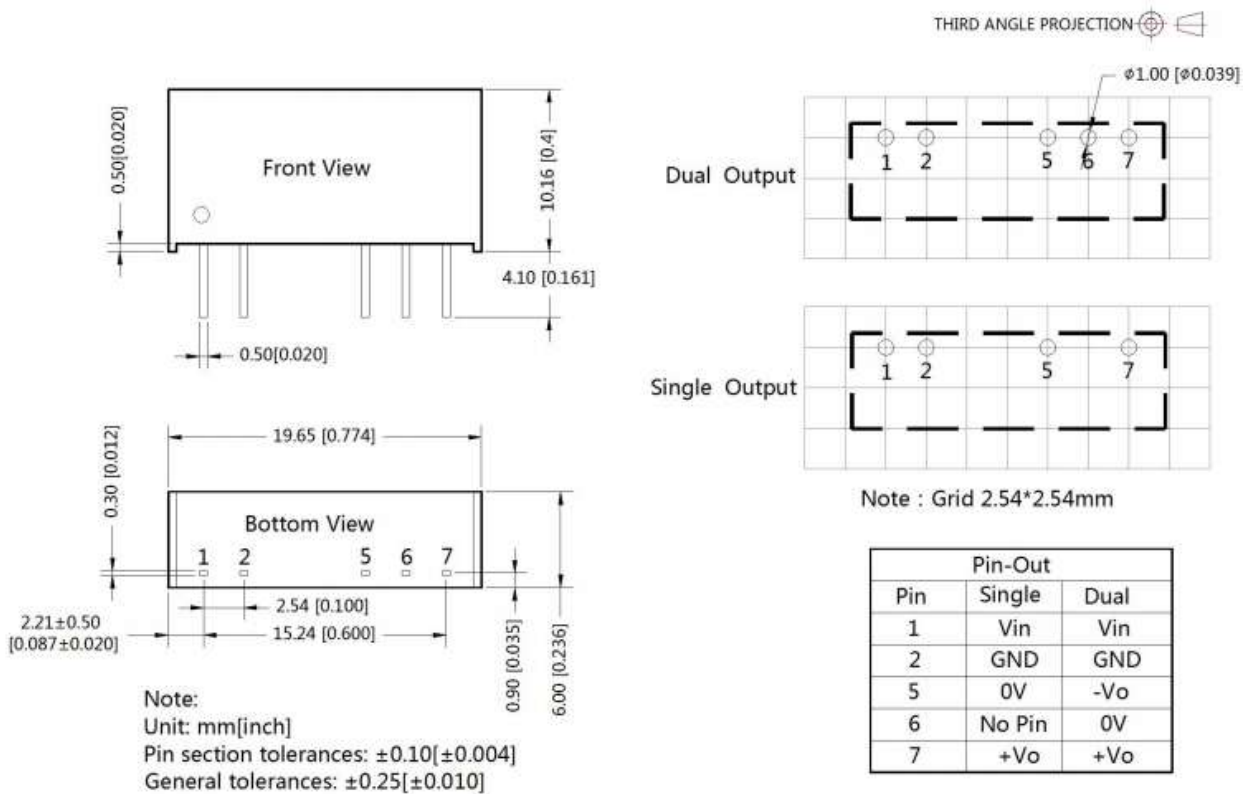

Approvals

**Safety Certification**

IEC62368, UL62368, EN62368 approved

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet.
2. The maximum capacitive load offered were tested at input voltage range and full load.
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity
4. Our products shall be classified according to ISO14001 and related environmental laws and regulations.