
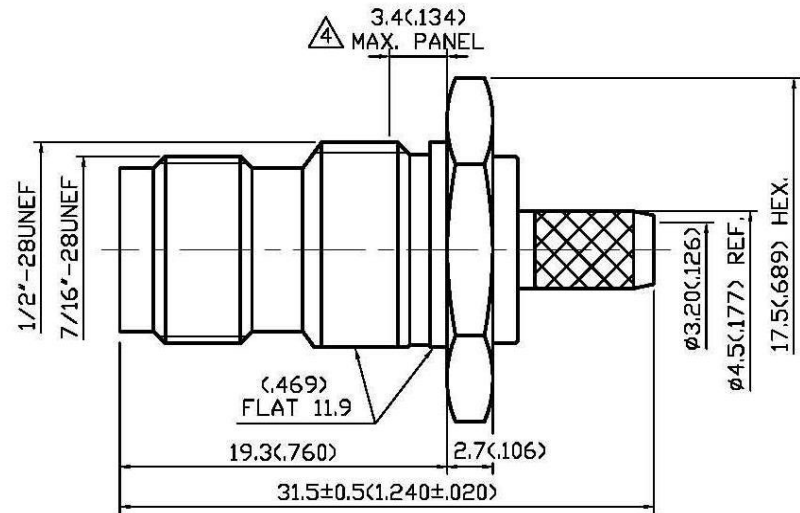
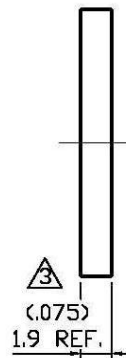



NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	06.25.03'
②	BACKGROUND FORMAT UPDATED	12.08.08'
③	1.9 → 1.9 REF. ADD WORKING VOLTAGE ADD PROOF VOLTAGE DEL CABLE RETENTION/SOLDER/	03.06.12'
④	ADD 3.4 MAX. PANEL; VSWR	05.21.12'
⑤	WORKING VOLTAGE → VOLTAGE RATING DEL PROOF VOLTAGE	03.18.13'

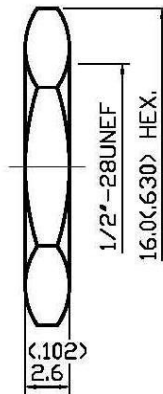

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 335 VOLTS MAX.
- 1.4 VSWR: 1.5 MAX. @3 GHz

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- 2.4 CRIMP FERRULE: BRASS PER JIS-C2700

3.0 FINISHES AND OTHERS


- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL


- 4.1 FOR USE WITH RG58U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP
- 4.3 CRIMP SIZE REQUIRED: CONTACT: 1.8(.071) HEX. CRIMP TOOL
FERRULE: 5.5(.218) HEX. CRIMP TOOL

5.0 ENVIRONMENTAL



- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C



MOUNTING HOLE



STRIPPING DIMENSION

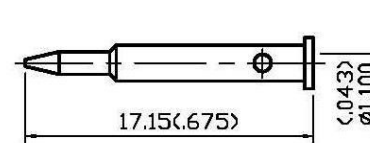

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	CRIMP FERRULE	BRASS	1	NICKEL
7	CENTER CONTACT	BRASS	1	GOLD
6	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
5	GASKET	SILICONE	1	NONE
4	INSULATION	TEFLON	1	NONE
3	BODY	BRASS	1	NICKEL 100μ" MIN.
2	WASHER	STEEL	1	NICKEL
1	NUT	BRASS	1	NICKEL



APPROVED by _____ DATE: _____

DESCRIPTION		RP-TNC STRAIGHT BULKHEAD JACK CRIMP									
製圖	DRAWN	TOLERANCE	品名	32-02	T.G.N	58U	DATE	03.09.98'	版次	REV.	A-5
		.X ±0.2	TITLE	ROHS COMPLIANT (50Ω)			日期				
檢圖	CHECK	.XX ±0.1	單位	mm(in)	DWG.NO.	32-0002					
		.XXX ±0.05	比例	SCALE							
認定	APPROVAL	ANGLE ±5°									