
# Surface Mount Zener Diode







#### Features:

- · Planar Die Construction
- · 500mW Power Dissipation
- · General Purpose, Medium Current
- Ideally Suited for Automated Assembly Processes

## 2

**SOD-123** 

### **Applications:**

- · Zener diode
- Ultra-small surface mount package

### Maximum Rating @ TA = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Forward voltage @ I <sub>F</sub> =10mA	V <sub>F</sub>	0.9	٧
Power dissipation	P <sub>d</sub>	500	mW
Thermal resistance, junction to ambient air	$R_{\theta jA}$	350	°C/W
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature range	T <sub>stg</sub>	-65 to +150	°C

**Note :** Device mounted on ceramic PCB; 7.6mm  $\times$  9.4mm  $\times$  0.87mm with pad areas 25mm<sup>2</sup>. Tested with pulses, Tp  $\leq$  1ms.

### Electrical Characteristics @ TA = 25°C unless otherwise specified

		Zener Voltage Range		Test Current	Maximum Zener Impedance		Maximum Reverse Leakage Current		
Type Number	Type Code		V <sub>z</sub> @I <sub>ZT</sub>		I <sub>ZT</sub>	Z <sub>ZT</sub> @I <sub>ZT</sub>	Z <sub>ZK</sub> @I <sub>ZK</sub> = 0.25mA	I <sub>R</sub>	@V <sub>R</sub>
		Nom(V)	Min(V)	Max(V)	mA		Ω	μΑ	V
MMSZ5237B	F2	8.2	7.79	8.61	20	8	500	3	6.5


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



# Surface Mount Zener Diode




Typical Characteristics @ TA = 25°C unless otherwise specified

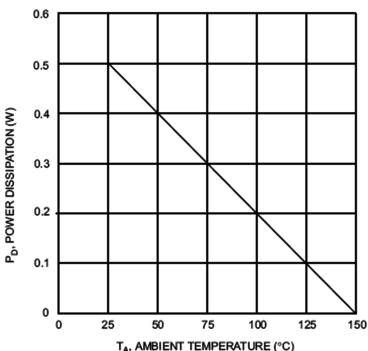

T<sub>A</sub>, AMBIENT TEMPERATURE (°C) Fig. 1 Power Dissipation vs Ambient Temperature

### **Package Outline**

Plastic surface mounted package

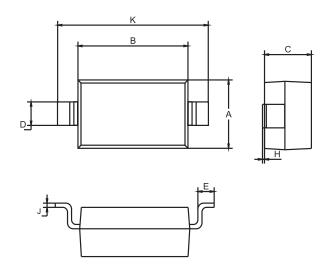

SOD-123				
Dim	Min	Max		
А	1.4	1.8		
В	2.55	2.85		
С	1.15 Typical			
D	0.5	0.6		
E	0.3	0.4		
Н	0.02	0.10		
J	0.1 Typical			
К	3.55	3.85		
All Dimensions in mm				


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



# Surface Mount Zener Diode



### **Soldering Footprint**

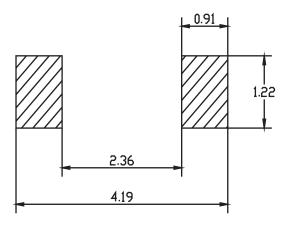

Dimensions: Millimetres

### **Package Information**

Device	Package	Shipping	
MMSZ5248B-7-F	SOD-123	3,000/Tape & Reel	

#### **Part Number Table**

Description	Part Number	
Surface Mount Zener Diode	MMSZ5248B-7-F	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

