



# Datasheet

## 7.5mm Pitch Standard Profile Rising Clamp Terminal

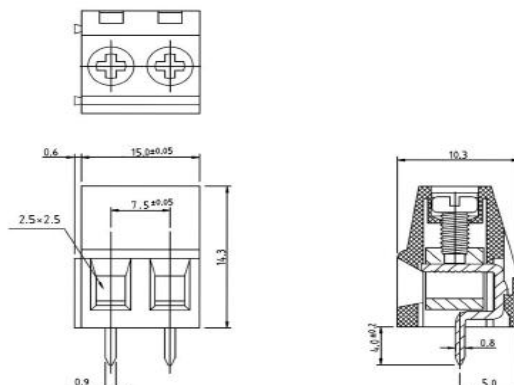

TYPE NO.	POLES	LENGTH
8970922	2	15mm
8970926	3	22.5mm
8970935	4	30mm
8970938	5	37.5mm
8970932	6	45mm
8970941	7	52.5mm
8970944	8	60mm
8970948	9	67.5mm
8970957	10	75mm
8970950	11	82.5mm
8970954	12	90mm

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 solid block end stackable
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.33-3.3 mm<sup>2</sup> (22-12 AWG)
- Guided pin alignment
- Captive screw
-  approved

### SPECIFICATION

Rating	10A 300V
Insulation resistance	5000MΩ/1000V
Withstand Voltage	AC1500V/1min
Contact Resistance	20mΩ
Working Temperature	-33°C to +120°C
Mouldings	UL94-V0 flame retardant PA66
Pin/Terminal	Tin plated brass
Wire clamp	Nickel plated brass
Screw/Torque	M2.5 Steel, Nickel Plated 0.4Nm
Recommended PCB hole size	ø1.5mm