

MATERIALS:

SHIELDED: STAINLESS STEEL.

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC


FLAMMABILITY RATING UL 94V-0.

CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

※凡標註 △記號者, 為品管檢驗之尺寸

- 6u" P/N 3101815601
- 15u" P/N 3101815701
- 30u" P/N 3101815801
- 50u" P/N 3101815901

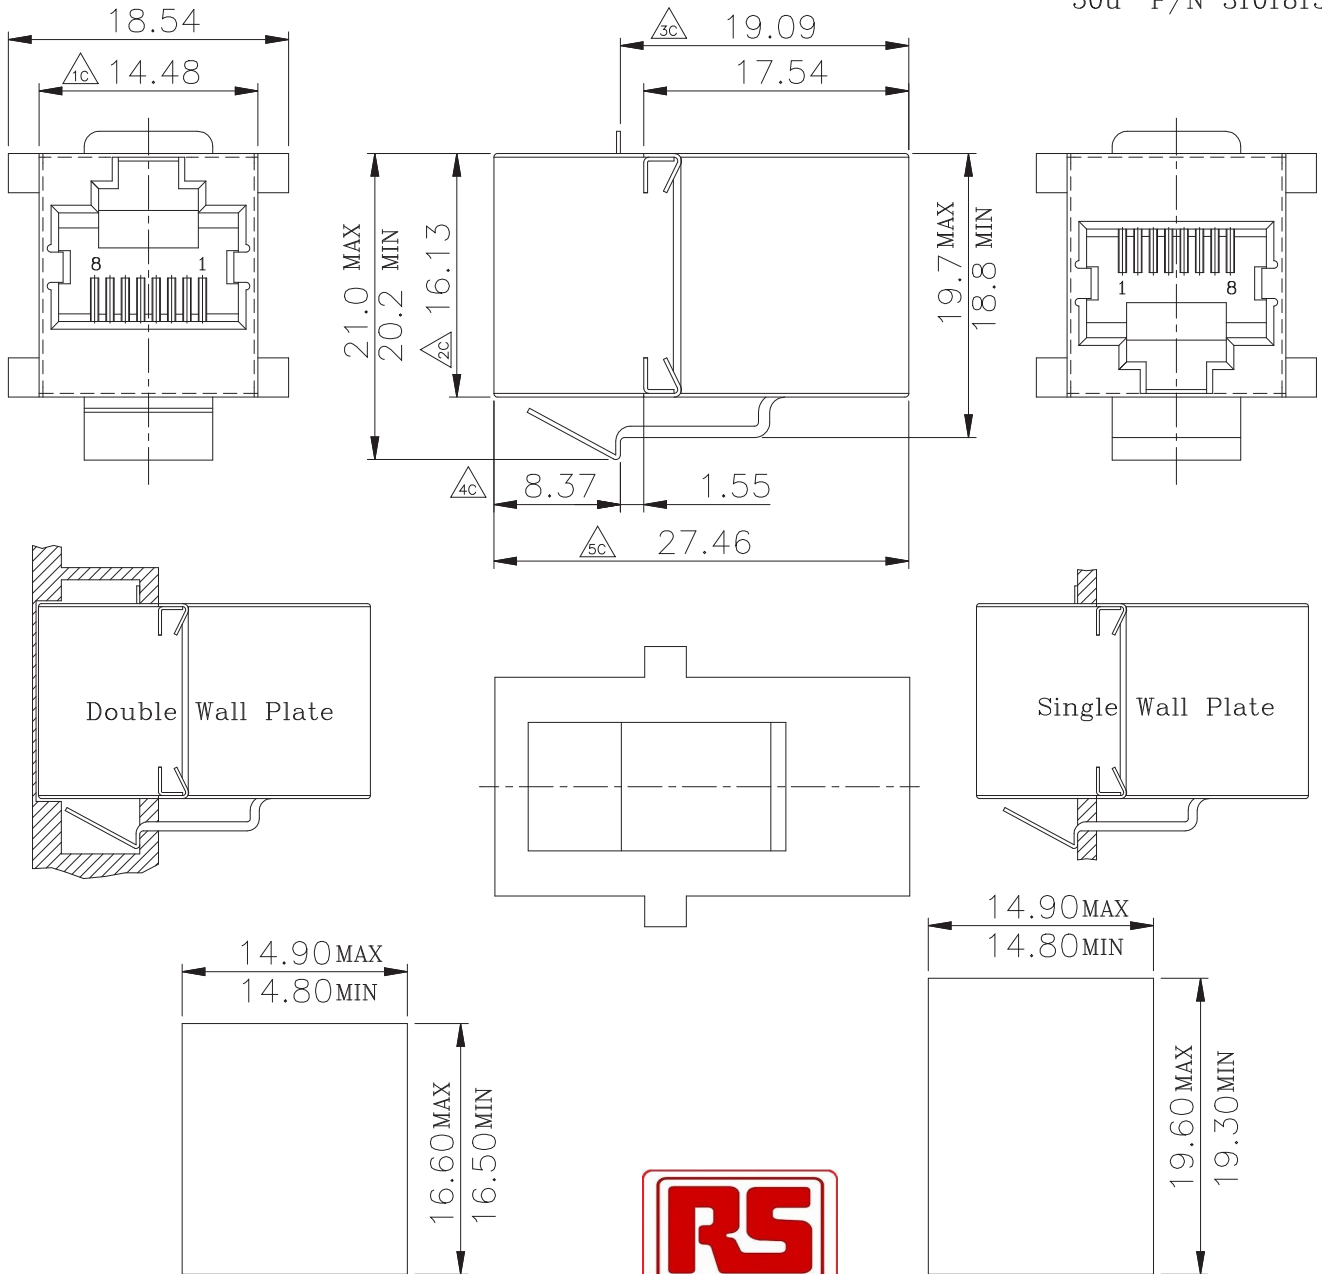

Front Panel Jack Only Clearance
W/O Latch Feature

Single Panel-Latch Clearance
Panel Thickness 0.062 inch

設計 DR. Andy 93.04.30	核准 APPD. Jerry 93.04.30	容許公差 TOLERANCE .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	品名 ARTICLE MODULAR COUPLER JACK(8P8C SHIELDED)
版本說明 REVISION NOTE			圖號 DWG NO. RS-1863111
		單位 UNIT mm	比例 SCALE 2/1
		張數 SHEET 1/1	版本 REV. A

