

ENGLISH


Datasheet

Multi Mode Fibre Optic Cable Assembly

RS Stock number 536-7500



Dimensions: (mm)

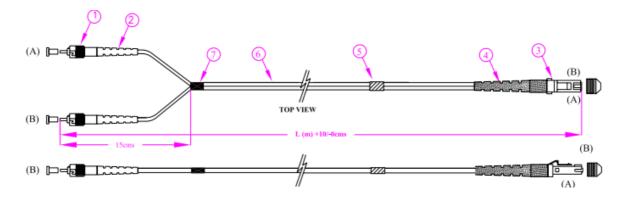

ld No.	Description	EA
1	St Connector	2
2	ST Boots	2
3	MTRJ Connector	1
4	MTRJ Boot	1
5	Identification Label	1
6	1.6mm Duplex Cable	1
7	Black Tape	1

Optical Performance

Multimode: (@ 1300nm) MTRJ: Max. IL-0.50dB Typical:0.30dB ST: Max.IL-0.50dB Typical: 0.20dB Singlemode: (@131nm and or 1550nm) MTRJ: Max.IL – 0.50dB Typical 0.30dB Return loss> 40dB ST: Max. IL- 0.30dB Typical: 0.20dB Return loss > 50dB

RoHS compliant Coiling Diameter of the Patchcord shall be greater than 200mm.

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.