


Datasheet

DPDT Toggle Switch On-On, 3 A, PCB

RS Stock number [734-7198](#)

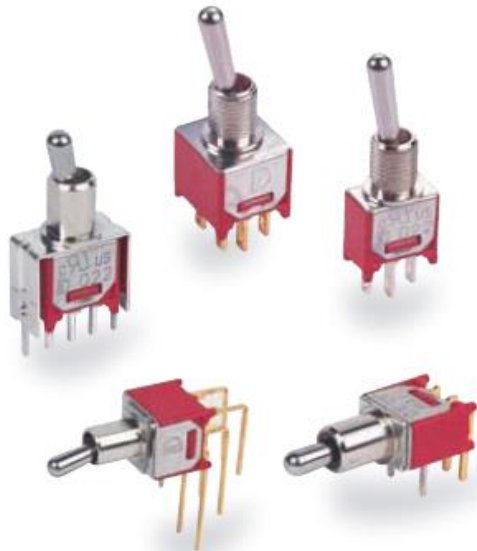

SPECIFICATIONS

CONTACT RATING: Dependent upon contact material

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 20 m Ω max. initial @ 2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 M Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

ACTUATOR: Brass, chrome plated.

BUSHING: Brass or zinc, nickel plated.

HOUSING: Stainless Steel.

SWITCH SUPPORT: Brass,tin plated.

TERMINAL/CONTACT: Brass,with Silver or gold plated.


SWITCH FUNCTION

| NO. POLES | UL/CSA MODEL NO. | MODEL NO. | SWITCH FUNCTION | | | CONNECTED TERMINALS / SCHEMATIC | | |
|-----------|------------------|-----------|-----------------|-------|-------|---------------------------------|-------|---------|
| | | | POS.1 | POS.2 | POS.3 | POS.1 | POS.2 | POS.3 |
| | | | | | | | | |
| SP | Q2211 | 2MS1 | ON | NONE | ON | 2-3 | N/A | 2-1 |
| | Q2212 | 2MS2 | ON | NONE | MOM | | | |
| | Q2213 | 2MS3 | ON | OFF | ON | | OPEN | |
| | Q2214 | 2MS4 | MOM | OFF | MOM | | | |
| | Q2215 | 2MS5 | ON | OFF | MOM | OPEN | N/A | 3-1 |
| | Q2216 | 2MS6 | OFF | NONE | ON | | | |
| DP | Q2221 | 2MD1 | ON | NONE | ON | 2-3,5-6 | N/A | 2-1,5-4 |
| | Q2222 | 2MD2 | ON | NONE | MOM | | | |
| | Q2223 | 2MD3 | ON | OFF | ON | | OPEN | |
| | ▲ Q2226 | 2MD6 | ON | ON | ON | | | |

MOM=MOMENTARY

▲ Please check the availability in advance before order


POLE OPTIONS

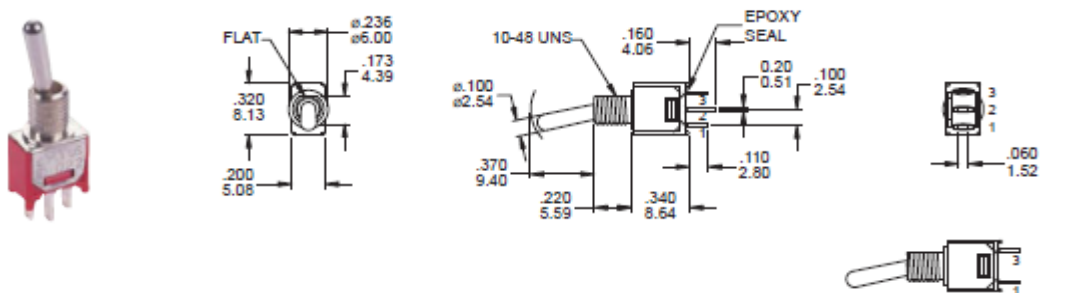

SPDT

Part No. Shown : 2MS1T1B1M1QE

2MS6 Models : Omit 2nd terminal

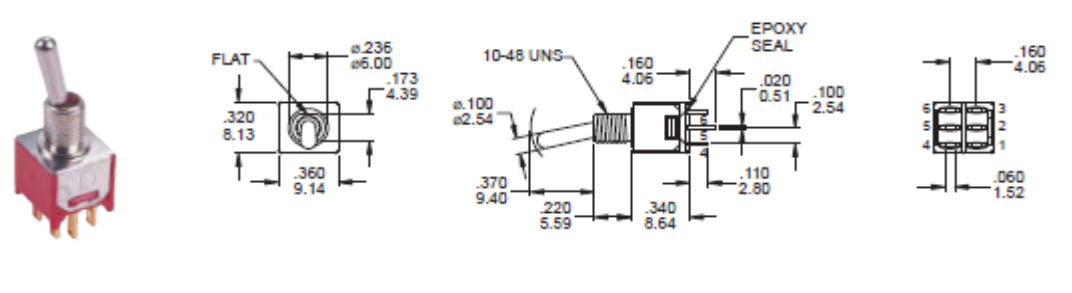


DPDT


Part No. Shown : 2MD1T1B1M1RE

ACTUATOR OPTIONS


T1




T2




T3



T4




T5





NONE: T1,T2,T3 Actuator shown with B1 to B4 bushing, subtract 0.09 (2.29) for B5 bushing, subtract 0.04 (1.02) for B7 bushing.
 T4,T5 Actuator shown with B5,B6 bushing, add 0.09 (2.29) for B1 to B3 bushing, add 0.05 (1.27) for B7 bushing.
 Std for M1,M2 Terminal sub .016(.040) for M6,M7,VSX

TL1B25

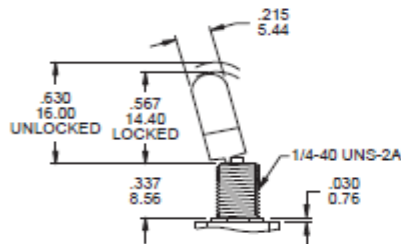


TL2B25

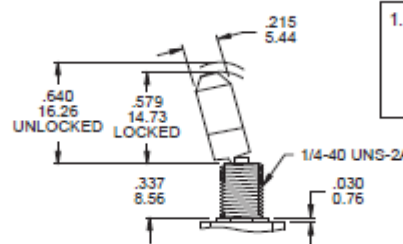


BUSHING OPTIONS


B1 THD
B2 NON-THD




B3 THD
B4 NON-THD



B5 THD
B6 NON-THD




B7 THD
B8 NON-THD




TERMINATION OPTIONS


M1 Solder lug

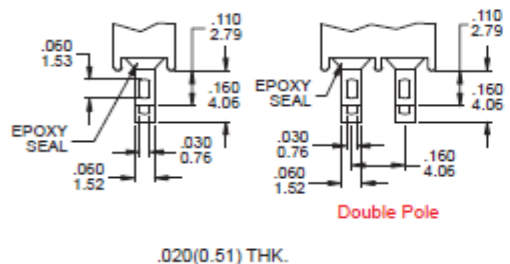


M2 PC Thru-hole

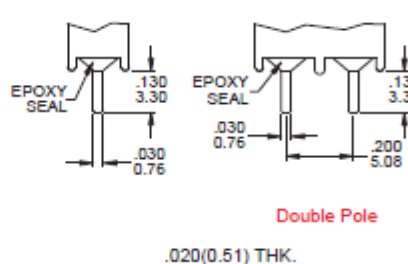


M5 Wire Wrap



M6

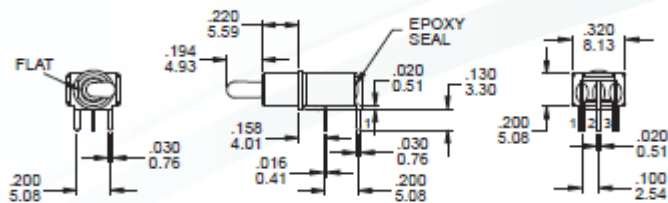


P.C. MOUNTING




SPDT

Part No. Shown : 2MS1T2B2M6RE

M6

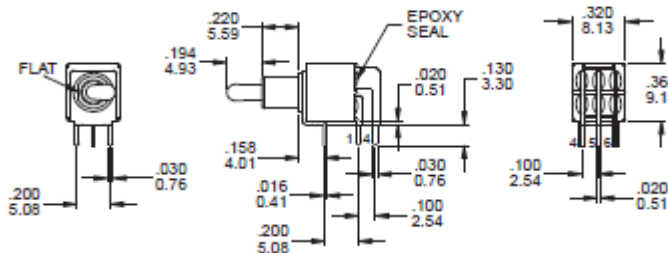


P.C. MOUNTING




DPDT

Part No. Shown : 2MD1T2B2M6QE

M7

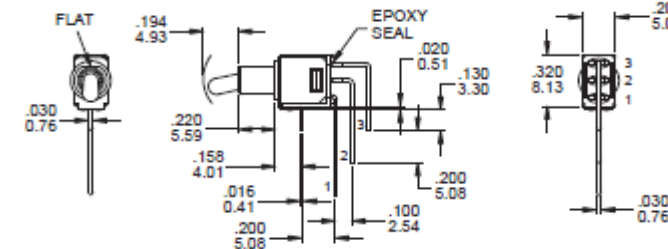


P.C. MOUNTING




SPDT

Part No. Shown : 2MS1T2B2M7RE

M7

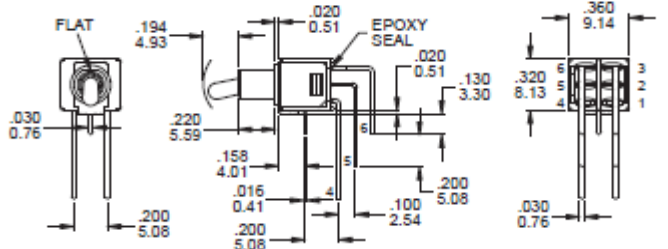

P.C. MOUNTING




DPDT

Part No. Shown : 2MD1T2B2M7RE


VS2 - VS3



SPDT

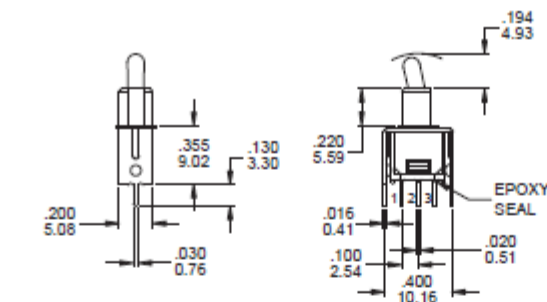


Part No. Shown : 2MS1T2B2VS2QE

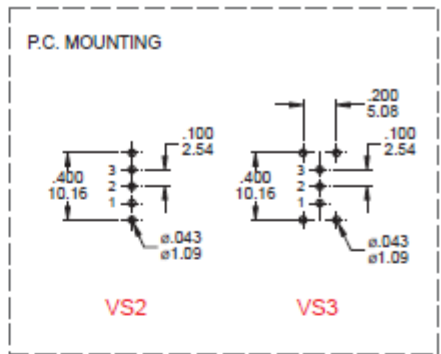


VS2 - VS3



DPDT

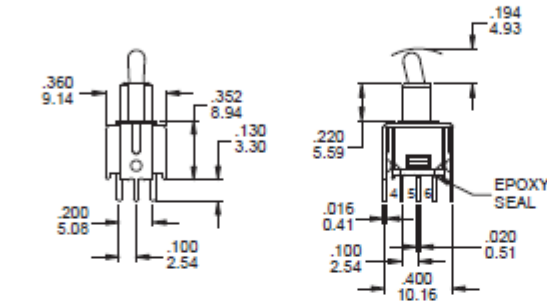

Part No. Shown : 2MD1T2B2VS2QE

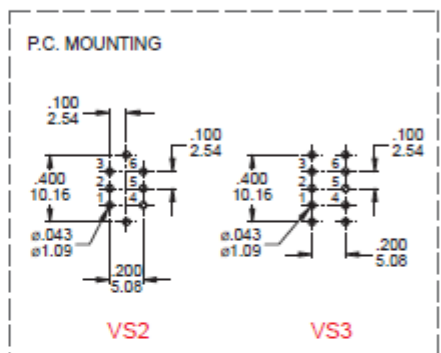


SNAP-IN TERMINATION OPTIONS

M6N

M7N


V2N

V3N

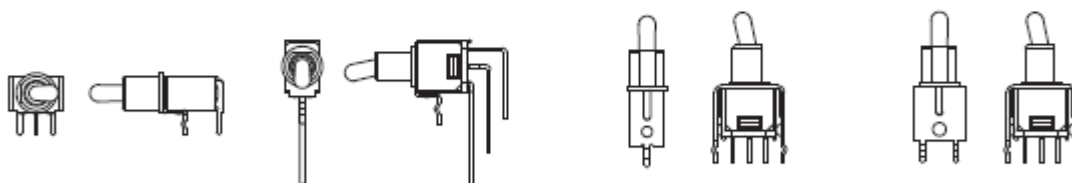


PANEL MOUNTING

10-48 BUSHING

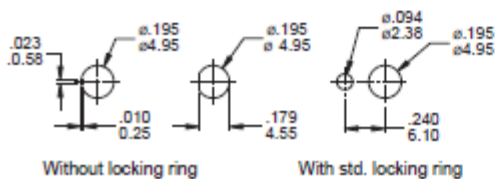


1/4 IN. BUSHING

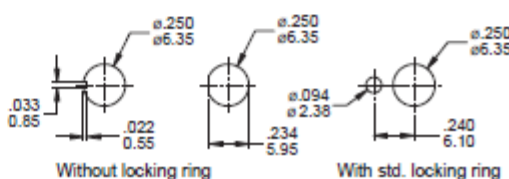

HARDWARE

10-48 NUT

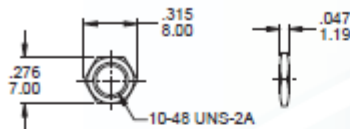

MNU-2M01

Supplied standard with B1/ B3 bushing

LOCK WASHER



MNU-2M03

Supplied standard with B1 / B3 bushing

CONTACT MATERIAL OPTIONS

| | CONTACT PLATING | TERMINAL PLATING | RATINGS |
|---|------------------|---------------------------------|---|
| Q | Silver | Q = Silver | 3 Amps with resistant load @ 120VAC or 28VDC 1 Amps with resistant load @ 250VAC |
| S | | S = Silver,pure - tin | |
| C | Gold over Silver | C = Gold over silver | |
| K | | K = Gold over silver,pure - tin | |
| R | Gold | R = Gold | 0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC) |
| G | | G = Gold,pure - tin | |

SOLDERING PROCESSES

MANUAL SOLDERING: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING: Recommended Soldering Temperature: 260 ± 5°C

Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)