


NO	DESCRIPTION	DATE
△	BACKGROUND FORMAT UPDATED	07.26.10*

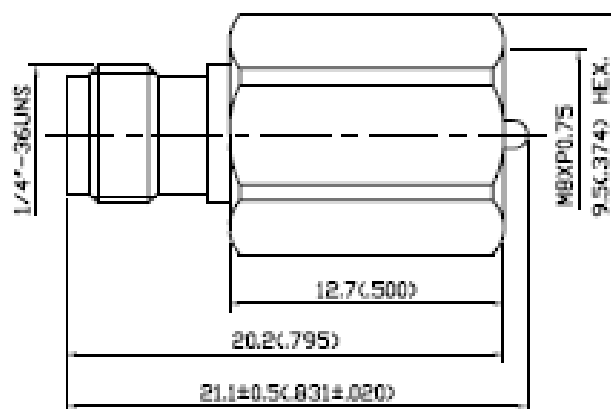

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-900 MHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B199 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS
- 3.2 RADIAL TORQUE OF CENTER CONTACT: NO APPLICABLE

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -55° C TO +125° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
4	BODY	BRASS	1	NICKEL 100μ ² MIN.
3	INSULATION	TEFLON	1	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD
1	INSULATION	TEFLON	1	NONE

APPROVED

by _____ DATE: _____



DESCRIPTION		FME PLUG TO SMA JACK		品名		23-04		T.G.N		日期	DATE	版次	REV.
製圖	Yoko	TOLERANCE	.X ±0.2	TITLE	\ROHS COMPLIANT (300)			日期	04.26.93*	版次	A-1		
檢圖	Jacky	CHECK	.XX ±0.1	單位	mm	DWG.NO.	23-0023						
核定	Lewis	APPROVAL	.XXX ±0.05	比例	SCALE								
		ANGLE	±5°		4:1								