

FEATURES

- The supply voltage ranging is between 12VAC to 230VAC and 12VDC to 230VDC
- 1C/O SPDT contact configuration with relay output is 8A
- 7 selectable time
- Fine adjustment of selected time range
- Green LED indication for supply and timing status
- Red LED indication for relay status
- Width is 17.5mm
- Din rail mount type

RS PRO SPDT Multi Function Multi timer -, ON Delay, DIN Rail

RS Stock No.: 102-6124



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO single-function timer relay performs the function of providing ON delay in the range between 0.1 seconds and 100hours. It is a compact digital equipment with high precision and accuracy to suit a wide variety of applications. This timer relay can be installed into new and existing applications without much hassle. It has two rotary switches at the front of the unit to set the timing range.

General Specifications

Mode of Operation	ON Delay
Contact Configuration	SPDT
Number of Timer Functions	Multi-Function
Time Range	7 Selectable time ranges (0.1 seconds – 100 hours)
Time Increment	10; 300; D:H: M:S; Days; Hour
Time Delay	100ms
Reset Time	100ms
Accuracy	± 1% of maximum full scale
Adjustment Accuracy	< 5% of maximum full scale
Repeat Accuracy	± 0.5% at constant conditions
Power on indication / Timing	Green LED
Relay Status	Red LED
Housing	Orange flame retardant
Applications	Textiles, Chemical industry, Mining, Irrigation, Raw material handling, Food and beverages, Industrial process control

Timing Ranges (7):		
Seconds	Minutes	Hours
0.1 – 1	0.1 – 1	0.1 – 1
1 – 10	1 – 10	1 – 10
		10 – 100

Electrical Specifications

Supply Voltage	12V to 230VAC/DC
Minimum Voltage	12VAC/DC
Maximum Voltage	230VAC/DC
Frequency Range	48Hz to 63Hz (AC supplies)
Relay Output	1 x SPDT relay output 8A
Terminal Type	Screw
Terminal Conductor Size	≤ 2 x 2.5mm ² solid or stranded
Supply Variation	+/- 15%
Overvoltage category	III (IEC 60664)
Rated Impulse Withstand Voltage	4kV (1.2/50μS)
Dielectric Voltage	2kV AC (rms)
Drift with Voltage	±0.2%/V
Electrical Life	≥150,000 ops at rated load

Power Consumption (Maximum):				
Voltage	12V	24V	110V	230V
AC	0.3VA	0.4VA	1.3VA	3.4VA
DC	0.26VA	0.24VA	0.47VA	0.95VA

Mechanical Specifications

Mounting Type	DIN-Rail
Width	17.5mm
Length	89mm
Weight	60g

Operation Environment Specifications


Maximum Operating Temperature	60°C
Minimum Operating Temperature	-20°C
Ambient Temperature	-20 to 60°C
Drift with temperature	± 0.05% / °C
Relative Humidity	+95%

Approvals

Compliance/Certifications	CE, UL
Standards Met	UL approved, cULus approved, IEC 61812, CE certified, C-tick certified, EN 61000-6-2, EN 61000-4-3, EN 61000-6-4, IEC 60947-1, IEC 60664




• CONNECTION DIAGRAM

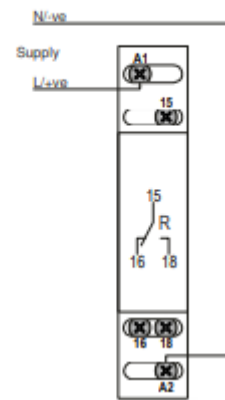


• SETTING DETAILS


1. Power supply status / Timing (Green) LED
2. Relay output status (Red) LED
3. "Set %" adjustment
4. Time delay "Range" selector

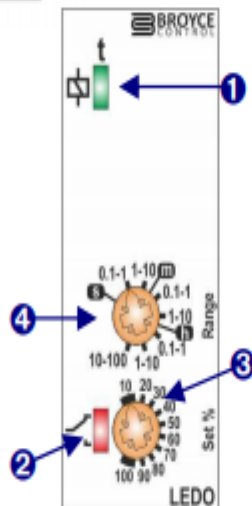

• DIMENSIONS

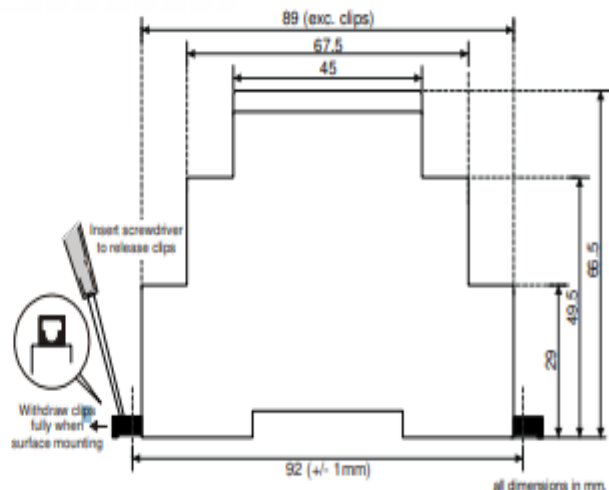

- FUNCTION DIAGRAM

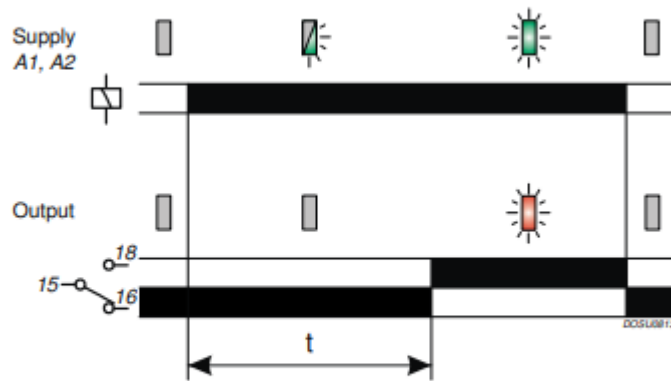

LED operation:

