


Data sheet

CSOJ6

ENGLISH

RS Stock No. 407-1624

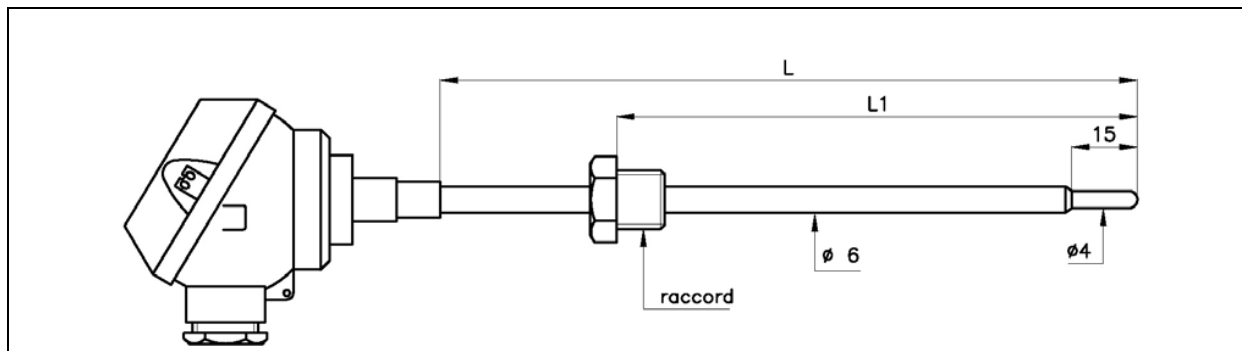

RTD SENSOR AT RESISTANCE WITH HEAD AND LINK

RANGE :

- 50 /250°C

USE :

-

KEY POINT :

- Fast answer time

SPECIFICATIONS :

- PT100Ω probe A Class – 1x3 wires
- Protector in 316L SS Ø6, sink Ø4 x 15 mm
- Connecting head in Noryl type NS12
- Borner connexion
- Joined link in 316L SS thread ½" GCY

DIMENSIONS :

- Length L1=L = 100 mm

METROLOGICAL DATA :

- Classe A :
Norme IEC 751
- General tolerance PT100 class A : $\pm 0.15 + 0.002 \cdot [t^{\circ}C]$

Autre Dimensions :

Length	100	250	500
Diameter	Ø6	407-1630	4107-1652
Ø6	407-1624	407-1630	4107-1652