


- Customization
- 01 series
- 03S series
- 05S series**
- 07S series
- 08 series
- 09C series
- 10 series
- 11 series
- 12 series
- 13 series
- 17 series
- 20 series
- 21 series
- 23 series
- 24 series
- 27 series
- 28 series
- 30 series
- 35 series
- 43 series
- F02 series
- L01 series

05S 80-350



TPR

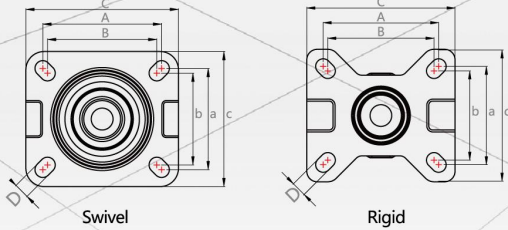

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

Wheel: Surface with superior elastic synthetic rubber.
Wheel surface hardness: 65-70°Shore A.
Wheel core structure: Polypropylene (PP).
Bearing: SUPO customization double ball bearing with iron dust-proof cover.

* Remark: Please refer to the standard of Zhongshan caster industry association.

For more information please refer to page 301.

Swivel Top Plate	Wheel Material	NO.	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(TPR)	C05S-01-75-412	75(3")	38	80	112	75	108		(C)101x82	(A)80x60 (B)73x53	(D)11
		C05S-01 D-75-412								(C)101x85		
	(TPR)	C05S-04-75-412	100(4")	38	123	137	88	114		(C)101x82	(A)88x75 (B)81x68	(D)11
		C05S-01 D-100-412								(C)101x85		
	(TPR)	C05S-01-125-412	125(5")	38	150	164	106	127		(C)113x100	(A)88x75 (B)81x68	(D)11
		C05S-01 D-125-412								(C)113x101		
	(TPR)	C05S-04-125-412	150(6")	38	167	191	118	130		(C)113x100	(A)88x75 (B)81x68	(D)11
		C05S-01 D-150-412								(C)113x101		
C05S-04-150-412										(C)113x101		

Others (MOQ)



Side lock brake(metal)	Swivel(Hollow Rivet)	Swivel(Hollow Rivet) with Total lock brake(Plastic)	Swivel(Hollow Rivet) with side lock brake(Metal)
C05S-01C-75-412	C05S-03-75-412	C05S-03D-75-412	C05S-03C-75-412
C05S-01C-100-412	C05S-03-100-412	C05S-03D-100-412	C05S-03C-100-412
C05S-01C-125-412	C05S-03-125-412	C05S-03D-125-412	C05S-03C-125-412
C05S-01C-150-412	C05S-03-150-412	C05S-03D-150-412	C05S-03C-150-412