

FEATURES

- Fix input unregulated dual output
- Continuous short-circuit protection.
- Compact SMD package
- Industry standard pin-out
- I/O isolation test voltage 1.5KVDC
- No-load input current as low as 5mA
- Operating temperature range - 40°C to +105°C
- High efficiency up to 85%
- IEC62368, UL62368, EN62368 approved

RS PRO 1W isolated DC-DC converters

- **2233637,2233639,2233643**



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Isolated DC-DC converters

Product Description

PCB Mount DC-DC converters are specially designed for applications where isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits. Featuring continuous short circuit protection and no-load input current as low as 8mA

General Specifications

Model	DC-DC 1W Isolated DC-DC converter
Mounting Type	PCB SMD
MTBF	MIL-HDBK-217F@25°C > 3,500,000 hrs
Applications	Industrial control systems, instrumentation, analogue, relay-driven and data switching circuits.

RS Stock#	Input Voltage (Vdc)		Output Voltage	Output Current	Wattage	Max. Capacitive Load(μF)	Efficiency (Typ)
	Nominal	Max					
2233637	5V (4.5-5.5)		±5V	±100/±10mA	1W	1200	82%
2233639			±12V	±42/±5mA	1W	220	83%
2233643			±24V	±21/±3mA	1W	100	85%

Input Specifications

Input Specification						
Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	5VDC input	±5VDC output	-	244/5	257/10	mA
		±12VDC output	-	241/12	254/20	
		±24VDC output	-	241/18	254/30	
Reflected Ripple Current	Nominal input voltage	-	15	-		
Surge Voltage (1sec. max.)	5VDC input	-0.7	-	9	VDC	
Input Filter		Capacitance Filter				
Hot Plug		Unavailable				

Output Specifications

Output Specification							
Item	Operating Conditions	Min	Typ.	Max	Unit		
Voltage Accuracy		See output regulation curves (Fig. 1)					
Linear Regulation	Input voltage change: $\pm 1\%$	-	-	1.2	-		
Load Regulation	10% -100% load	$\pm 5\text{VDC}$ output		10	15	%	
		$\pm 12\text{VDC}$ output		7	10		
		$\pm 24\text{VDC}$ output		-	5		10
Temperature Coefficient	100% load	-	± 0.02	-	$\%/^{\circ}\text{C}$		
Ripple & Noise *	20MHz bandwidth	$\pm 5\text{VDC}$ & $\pm 12\text{VDC}$ output		-	30	75	mV p-p
		$\pm 24\text{VDC}$ output		-	50	100	
Short circuit Protection		Continuous, self-recovery					
Note: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.							

General Specifications

Item	Operating Conditions	Min	Typ	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	-	-	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	-	-	M Ω
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V		20		pF
Operating Temperature	Derating when operating temperature $\geq 100^{\circ}\text{C}$, (see Fig. 2)	-40	-	+105	$^{\circ}\text{C}$
Storage Temperature		-55	-	+125	
Case Temperature Rise	Ta=25 $^{\circ}\text{C}$	-	15	-	
Storage Humidity	Non-condensing	-	-	95	%RH
Reflow Soldering Temperature*		Peak temp. $\leq 245^{\circ}\text{C}$, maximum duration time $\leq 60\text{s}$ over 217°C .			$^{\circ}\text{C}$
Moisture Sensitivity Level (MSL)	Sensitivity Level (MSL) IPC/JEDEC J-STD-020D.1	Level 1			
Switching Frequency *	Full load, nominal input voltage	-	270	-	KHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$		3500		K hours
Note: * For actual application, please refer to					

EMC Specifications

Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)	
	RE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±4kV	Perf. Criteria B

Typical Performance Curves

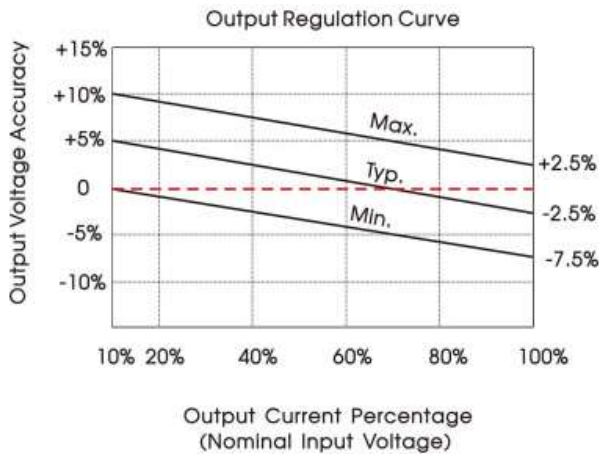


Fig. 1



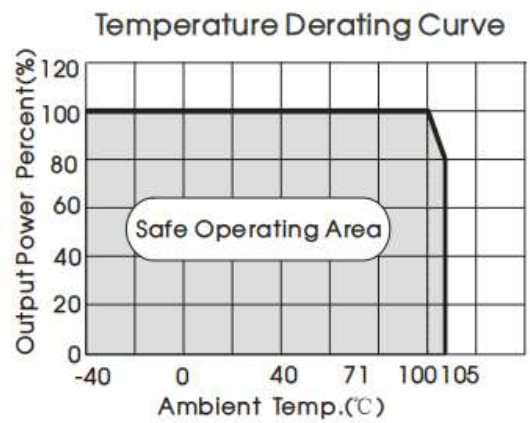


Fig. 2

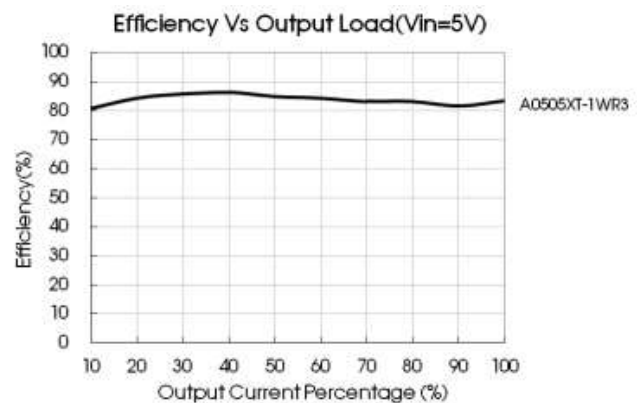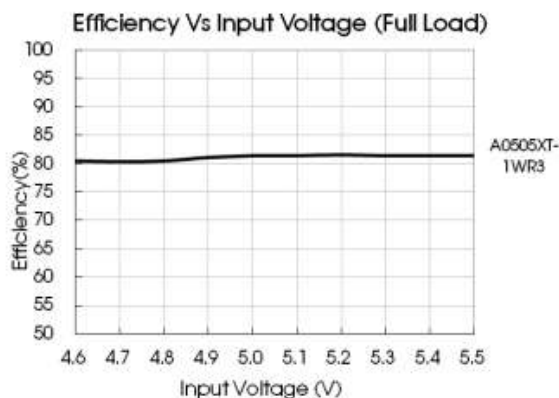

Design Reference

Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3. Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

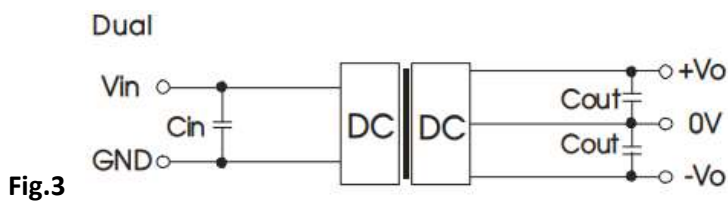


Table 1 : Recommended input and output capacitor values

V _{in}	C _{in}	V _{out}	C _{out}
5VDC	4.7μF	±5VDC	4.7μF
		±12VDC	1μF
		±24VDC	1μF

EMC compliance circuit

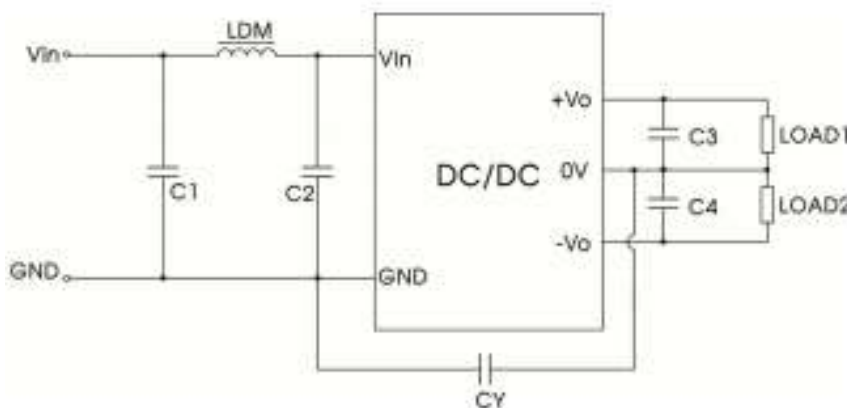


Fig 4.


Table 2 : EMC recommended circuit value table

Input voltage 5VDC	Output voltage(VDC)	±5VDC	±12VDC/±24VDC
	EMI	C1	4.7µF /25V
C2		4.7µF /50V	4.7µF /25V
CY		-	1nF/2KVDC HEC C1206X102K202T JOHANSON 202R18W102KV4E
C3		Refer to the Cout in table 1	
C4		Refer to the Cout in table 1	
LDM		6.8µH	6.8µH

Mechanical Specifications

Case material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	15.24 x 11.40 x 7.25 mm
Weight	1.4g (Typ.)
Cooling Method	Free air convection

Dimensions and recommended layout

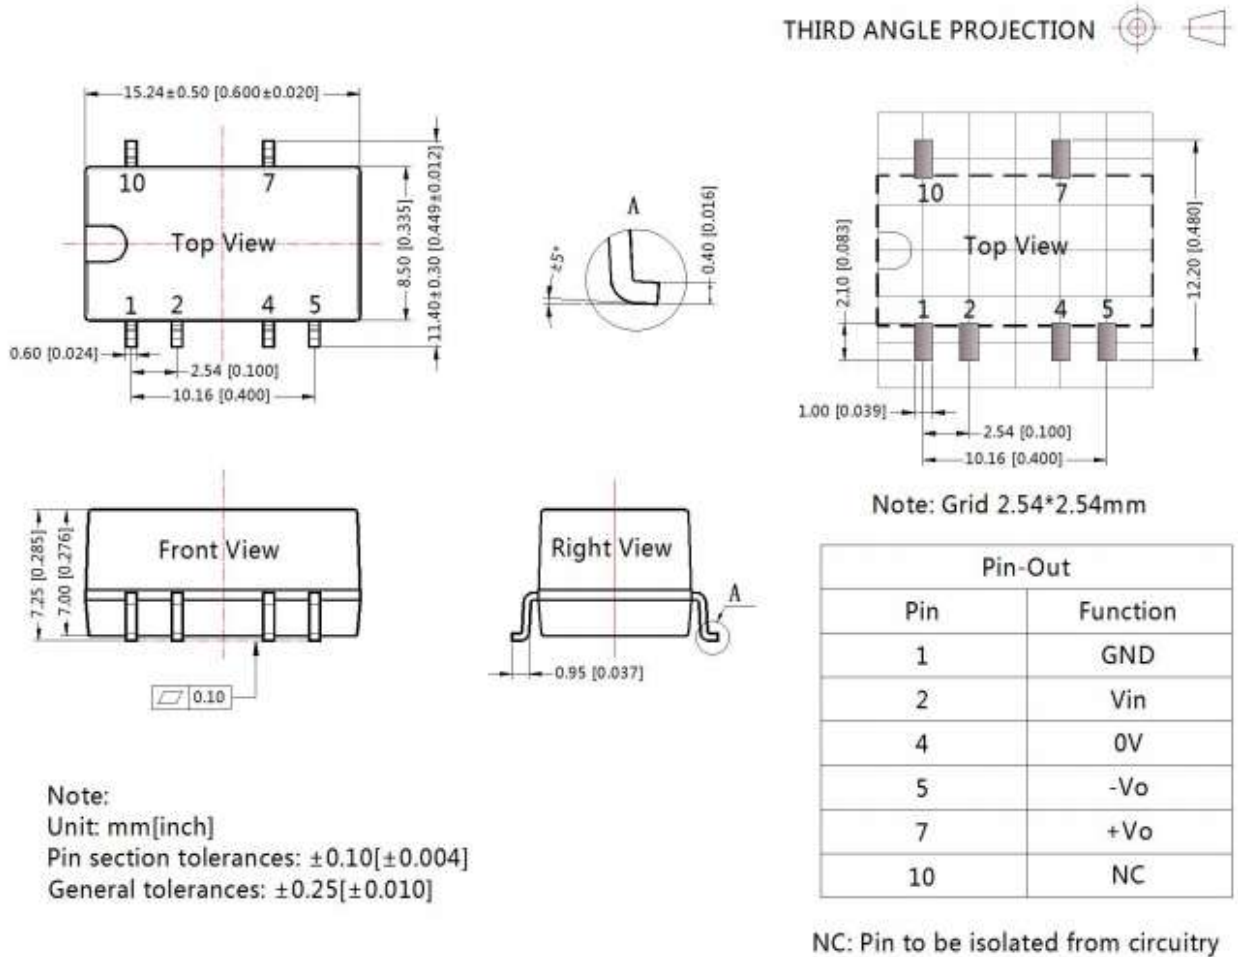

Approvals

Safety Certification	IEC62368, UL62368, EN62368 approved
-----------------------------	-------------------------------------

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet.
2. The maximum capacitive load offered were tested at input voltage range and full load.
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity
4. Our products shall be classified according to ISO14001 and related environmental laws and regulations.