



### **BR 47/35 Esc**

Machine for basic and maintenance cleaning of escalators and travelators with a performance of 2-3 escalators/travelators per hour.

### 1 Excellent suction power

- The applied water is reliably sucked back into the machine by the two powerful suction turbines together with four straight suction hoses and matching combs.
- Prevents water from dripping into the escalator shaft.

### 2 Suitable for escalators


- Combs which enter the grooves in the escalator provide the necessary vacuum
- Different combs are available to suit different types of escalators. This ensures that the moisture is effectively vacuumed from the escalator.

### 3 Excellent suction power

- The applied water is reliably sucked back into the machine by the two powerful suction turbines together with four straight suction hoses and matching combs.
- Prevents water from dripping into the escalator shaft.
- 4 Easy to stand up at the rear of the machine during operation
- For simple operation.

# **TECHNICAL DATA AND EQUIPMENT**



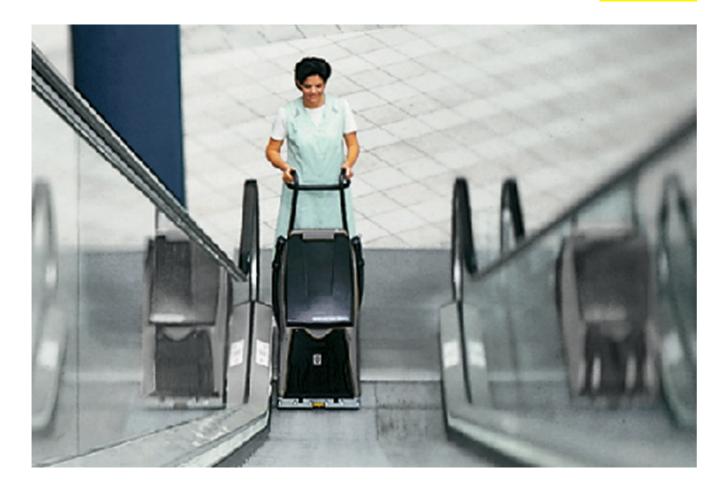

### BR 47/35 Esc

- $\hfill \blacksquare$  Cleans escalators and travelators while they are running
- Equipped with standard wash brush and pick-up brush
- Reliable water pick up

Order no.         1.310-109.0           EAN code         4039784470019           Working width         mm         470           Brush working width, vacuuming         mm         470           Working width, vacuuming         mm         470           Fresh/dirty water tank         I         35 / 35           Brush speed         rpm         870-1090           Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Technical data		
Working width         mm         470           Brush working width, vacuuming         mm         470           Working width, vacuuming         mm         470           Fresh/dirty water tank         I         35 / 35           Brush speed         rpm         870-1090           Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Order no.		1.310-109.0
Brush working width         mm         470           Working width, vacuuming         mm         470           Fresh/dirty water tank         I         35 / 35           Brush speed         rpm         870-1090           Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	EAN code		4039784470019
Working width, vacuuming         mm         470           Fresh/dirty water tank         I         35 / 35           Brush speed         rpm         870-1090           Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Working width	mm	470
Fresh/dirty water tank         I         35 / 35           Brush speed         rpm         870-1090           Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Brush working width	mm	470
Brush speed         rpm         870-1090           Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Working width, vacuuming	mm	470
Brush motor power         W         1100           Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Fresh/dirty water tank	I	35 / 35
Suction motor         W         800           Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Brush speed	rpm	870-1090
Sound pressure level         dB(A)         75           Voltage         V         220-240           Frequency         Hz         50-60	Brush motor power	W	1100
Voltage         V         220-240           Frequency         Hz         50-60	Suction motor	W	800
Frequency Hz 50-60	Sound pressure level	dB(A)	75
	Voltage	V	220-240
Weight I/g 00	Frequency	Hz	50-60
weight kg 90	Weight	kg	90
Dimensions (L × W × H) mm $1200 \times 670 \times 1100$	Dimensions (L × W × H)	mm	1200 × 670 × 1100

Equipment		
Cleaning brushes		
Pick-up brushes		
Mains operation		
Suction motor	W	800

■ Included in the scope of supply.

## **ACCESSORIES FOR BR 47/35 ESC** 1.310-109.0































		Order no.	Hardness / Brush type	Colour	Quanti- ty	Price	Description	
Brushes								Ė
Brushes standard	1	5.762-266.0	soft	White	1 piece(s)		Machine requires 2. For moderate to heavy soiling.	•
Brushes, intake brushes	2	5.762-268.0		black	1 piece(s)		Machine requires 2.	
Brushes, hard	3	5.762-267.0	hard	black	1 piece(s)		Machine requires 2. For removing stubborn dirt on hard-wearing surfaces.	
Other		'			p. 555 (s)	1		
Guid rail, standard	4	5.032-932.0			1 piece(s)		Guide rail, standard.	ŀ
Groove rake	5	6.369-507.0			1 piece(s)		Companies KONE + Schindler; for manual removal of stubborn dirt, such as small stones, etc.	
	6	6.369-508.0			1		Companies Thyssen + OTIS; for manual removal of stubbor	n r
					piece(s)		dirt, such as small stones, etc.	'' [
Inlet/outlet combs			_					
Inlet combs, grey	7	6.369-509.0		grey	2 piece(s)		Companies KONE, O&K.	
Trailing combs, grey	8	6.369-519.0		grey	2 piece(s)			
Inlet combs, black	9	6.369-510.0		black	2 piece(s)		OTIS, FUJITEL, MONTGOMERY.	
Trailing combs, black	10	6.369-520.0		black	2 piece(s)		Fa. OTIS, Thyssen-Krupp, FUJITEL, MONTGOMERY.	
Inlet combs, green	11	6.369-511.0		green	2 piece(s)		Schindler, Westinghouse, MITSUBISHI.	
Trailing combs, green	12	6.369-521.0		green	2 piece(s)			
Inlet combs, white	13	6.369-512.0		White	2 piece(s)		CNIM, DONG YANG, HITACHI, TOSHIBA.	
Trailing combs, white	14	6.369-522.0		White	2 piece(s)		_	
Inlet combs, blue	15	6.369-914.0		blue	2 piece(s)		OTIS, models 622 and 913.	
Outlet combs, blue	16	6.369-915.0		blue	2 piece(s)			
Inlet combs, yellow	17	6.371-272.0		yellow	2 piece(s)		Inlet combs for Thyssen-Krupp and Fujitec escalators.	
Outlet combs, yellow	18	6.371-273.0		yellow	2 piece(s)		Outlet combs for Thyssen-Krupp and Fujitec escalators.	
Inlet combs, orange	19	6.371-321.0		orange	2 piece(s)		Fa. Thyssen-Krupp, model FT 983.	
Outlet combs, orange	20	6.371-322.0		orange	2 piece(s)			
Hand pads					1 1		•	
Hand pads	21	6.369-513.0	medium	green	5 piece(s)		KONE, green, for manual cleaning of vertical surfaces.	
	22	6.369-514.0	medium	green	5 piece(s)		OTIS, for manual cleaning of vertical surfaces.	
	23	6.369-515.0	medium	green	5 piece(s)		Schindler, for manual cleaning of vertical surfaces.	
	24	6.369-516.0	medium	green	5 piece(s)		Thyssen, for manual cleaning of vertical surfaces.	
			1		piece(s)			

<sup>■</sup> Included in the scope of supply. 

Available accessories.

# **ACCESSORIES FOR BR 47/35 ESC 1.310-109.0**









		Order no.	Length	Colour	Quanti- ty	Price	Description	
Miscellaneous								
Extension cable	1	6.647-022.0	20 m		1 piece(s)		Extension cable, 20 m, 3x1.5 mm <sup>2</sup> . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.	
Filling hose	2	6.389-524.0	1.5 m		1 piece(s)		Filling hose, 1500 mm. With universal funnel. Facilitates machine filling from a water tap.	
Dosing aids				•				
DS 3 Cleaning Agent Dosing Station	3	2.641-811.0			1 piece(s)		After connecting to a tap, cleaning agent can be filled into the fresh water tank diluted as required. Can also be used with the filling system attachment kit. Includes backflow preventer (DIN EN 1717).	

<sup>■</sup> Included in the scope of supply. 

□ Available accessories.