

*New*

# MEGADORA Insulated Screwdrivers

No.960 / 960PS PAT.

Insulated Screwdrivers Series  
certified by VDE,  
International certification authority.

1000V AC or less, 1500V DC or less



**1000V**  
IEC60900

VDE is an authorized third-party  
certification organization.

**Reliable - 100% Energization  
(Dielectric) Inspection  
Conducted!**



**against electric shock**  
**For protection**



## Applications

For prevention of electric shock, short-circuit during electric works for power equipment, telecommunication devices, electric vehicles, solar power stations, and so on.



# MEGADORA VDE

Highly precise tip-end  
(black oxide finish)

Chrome-vanadium steel,  
fully hardened



Safe and secured  
double insulation layer

**STOP** using the screwdriver  
when its yellow layer comes out.

### Flat Surface Grip

Soft and hard grip with combination of stepless and stain-free smooth product line and surface. Always large area of contact between the hand and the product, however it is held.




Non-slip process on 3 surfaces even with oily hand.

Commonly available screwdrivers with a shank cover is for the purpose of **short-circuit prevention**, NOT for **electric shock prevention**. The VDE mark is allowed to be on a product which **has passed** the 1000V energization test (**all pieces**).


Also, this mark proves that the product has passed other 6 **severe tests**, apart from this 1000V test. Highly recommended to **use VED marked insulated tools**, with measures against unexpected electric shock taken, especially for the high voltage work which may induce serious **electrification accidents**.



**1000V**  
IEC60900

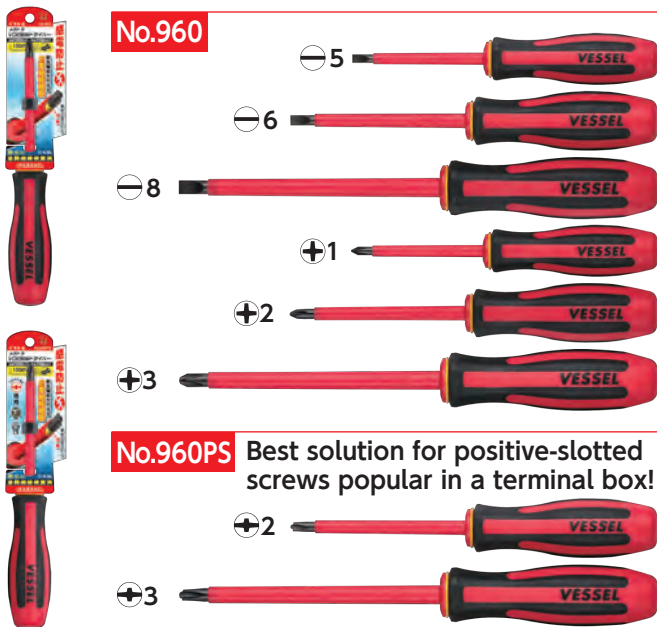

### No.960

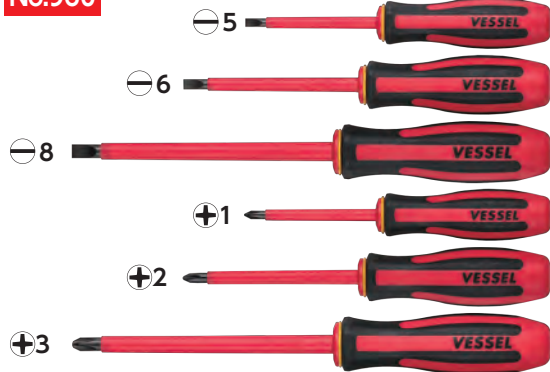

### No.960PS Best solution for positive-slotted screws popular in a terminal box!



No.960							Inner Ctn.	Outer Ctn.	EDP No.
⊖ 0.8×5×75	5	0.8	75	6.8	30	177	6	60	125824
⊖ 1.0×6×100	6	1	100	7.8	34	212	6	60	125825
⊖ 1.2×8×150	8	1.2	150	9.8	36	277	6	60	125826
⊕ 1 × 75	⊕No.1	75	6.8	30	177	6	60	125821	
⊕ 2 × 100	⊕No.2	100	7.8	34	212	6	60	125822	
⊕ 3 × 150	⊕No.3	150	9.8	36	277	6	60	125823	

No.960PS							Inner Ctn.	Outer Ctn.	EDP No.
PS2 × 100	PS2	100	7.8	34	212	6	60	125827	
PS3 × 150	PS3	150	9.8	36	277	6	60	125828	

### ⚠ WARNING!

- NEVER USE FOR HOT-LINE JOB. RISQUE OF ELECTRICAL SHOCK.
- Make sure in advance that the usage environment is less than 1000V AC, 1500V DC.
- USE INSULATED GLOVES WHEN WORKING WITH THIS SCREWDRIVER.
- Insulation is applied only to the grip and the red shank cover.
- STOP IMMEDIATELY using this screwdriver when the yellow shank cover comes out or there is a damage or alike on the product.

**WARNING** ● For safety purposes, read the instruction manual carefully before using the unit. ● Do not use this product in an explosion-proof area. ● A high voltage is applied on this product. Make sure that water, oil, solvents, etc., do not come in contact. ● Avoid dew condensation as it can result in electric shock or product damage. ● Keep away metal objects such as tools or needles, or body parts such as fingers, hands or face from the needle electrode because a high voltage is applied on the needle electrode.

Manufactured by

## VESSEL Co., Inc.

17-25, Fukae-kita 2-chome, Higashinari-ku, Osaka 537-0001 JAPAN  
Tel : +81(0)6 6976 7778 Fax : +81(0)6 6972 9441

### VESSEL EUROPE

6, avenue du 1er Mai, ZAE Les Glaises, 91120 Palaiseau FRANCE  
Tel : +33(0)1 69 19 17 42 Fax : +33(0)1 69 19 42 20

E-mail : export@vessel.co.jp URL : http://www.vessel.co.jp/english/

●For improvements, the product specifications, size, price and other information may be subject to change without prior notice.

Distributed by

Printed in Japan

17072721.01