

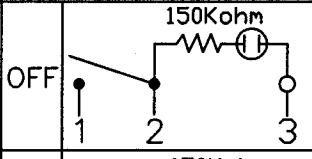
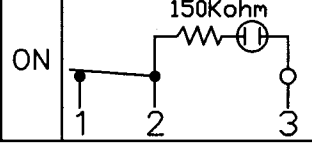
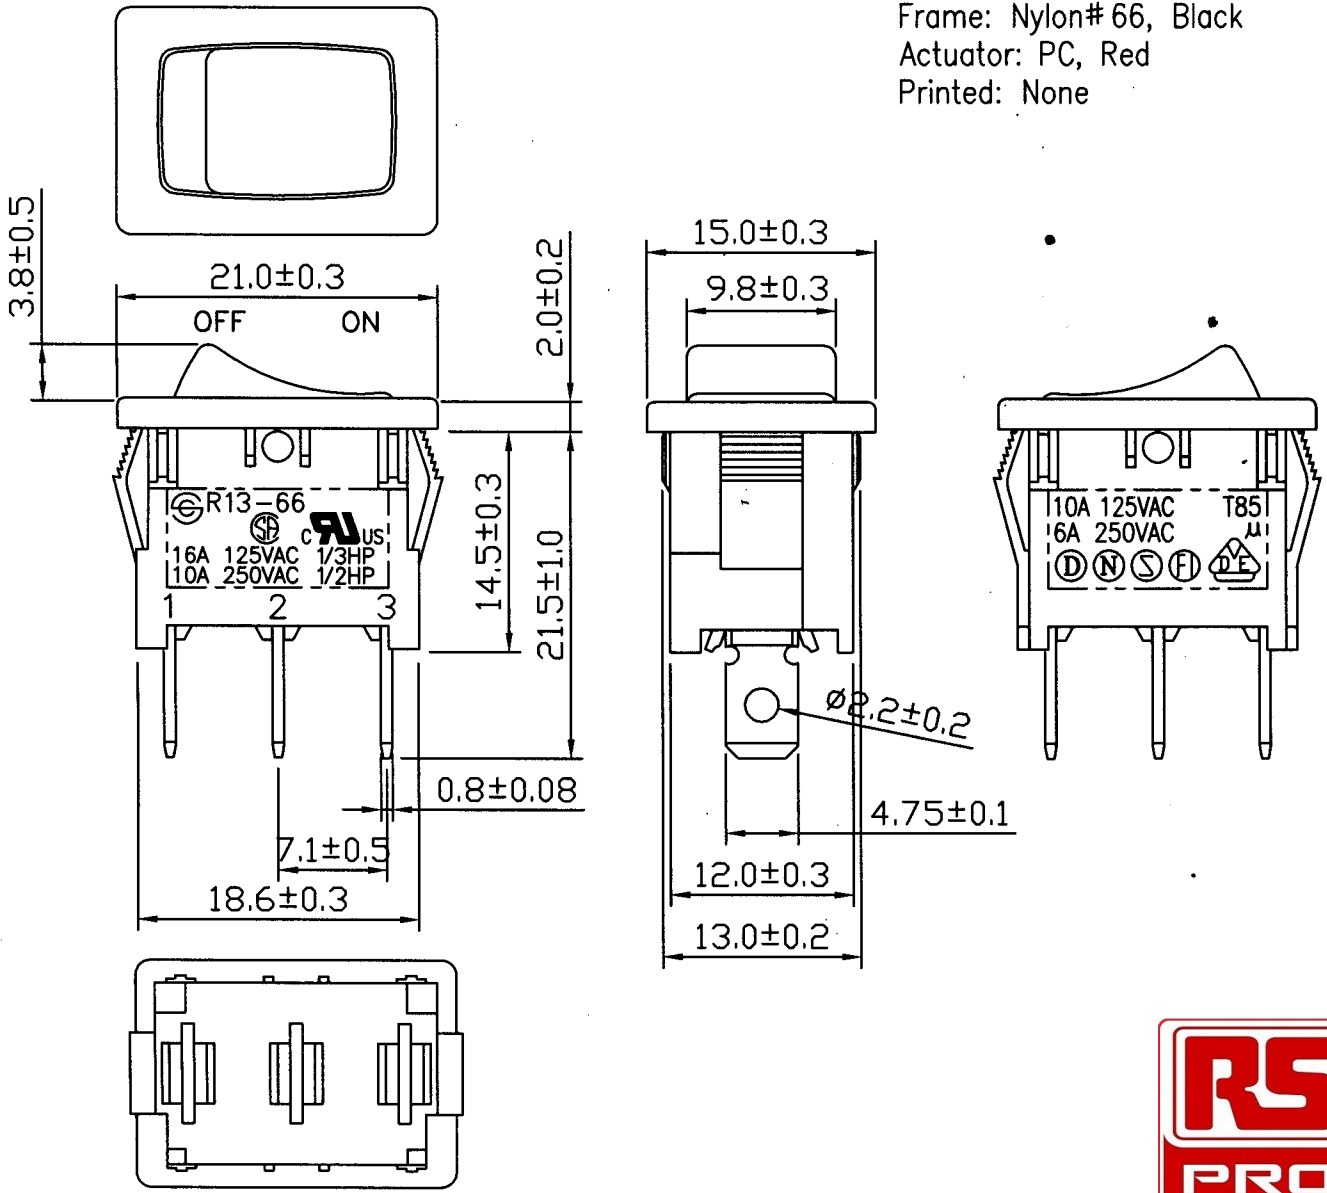


Rating	10A 125V, 6A 250V AC		Mounting Hole	Circuit Diagram												
	16A 125VAC 1/3HP 10A 250VAC 1/2HP															
Contact Resistance	50m ohm Max.															
Insulation Resistance	DC 500V 100M ohm Min.															
Dielectric Strength	AC 1500V 1 minute		<table border="1"> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75...1.25</td> <td>19.2-0.1</td> <td>13.2+0.1</td> </tr> <tr> <td>1.25...2</td> <td>19.4-0.1</td> <td>13.2+0.1</td> </tr> <tr> <td>2...3</td> <td>19.8-0.1</td> <td>13.2+0.1</td> </tr> </table>	Thickness	X	Y	0.75...1.25	19.2-0.1	13.2+0.1	1.25...2	19.4-0.1	13.2+0.1	2...3	19.8-0.1	13.2+0.1	
Thickness	X	Y														
0.75...1.25	19.2-0.1	13.2+0.1														
1.25...2	19.4-0.1	13.2+0.1														
2...3	19.8-0.1	13.2+0.1														
Operation Temperature	-20°C~85°C															
Switch Function	3P SPST ON-OFF(Illuminated)															

Material:  
 Frame: Nylon# 66, Black  
 Actuator: PC, Red  
 Printed: None



C8\R13\R13-66BW-02(1822231)

Date	Name	Description			NO
Drawn	Checked	Approved	SCI BOM NO.	1822231	Model Name
曹盈芳	<i>[Signature]</i>		Customer No.		ROCKER SWITCH
12/12/07	<i>[Signature]</i>		Unit	mm	Model No.
					R13-66BW-02
					REV.
					0