


Datasheet

RTD Extension Cable – 4 core PTFE (5,10 & 25 reel lengths)

Platinum Resistance Thermometer Extension Cable, PTFE insulated & screened

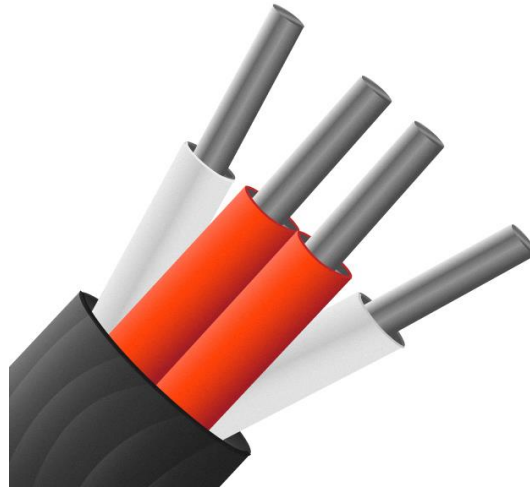

- PTFE insulated cable for extending Platinum Resistance Thermometers
- High temperature to 260°C, wrapped PTFE tape construction
- Can be used to extend 2, 3 or 4 wire RTD configurations
- Commonly used for Pt100Ω thermometers, also suitable with other types such as Pt130, Pt500 & Pt1000Ω
- 4 core PTFE insulated 7/0.2mm silver plated copper conductors, twisted cores, Mylar tape, silver plated copper braided screen with PTFE insulated outer jacket
- Cores colour coded 2 x Red / 2 x White to IEC-751 + black outer jacket
- Good mechanical strength and flexibility, resistant to oils, acids and other adverse fluids, steam, gasses etc.
- Insulation rating -75°C to 260°C
- Supplied in 5, 10, & 25 metre reel lengths

Type	Conductors	mm ²	Cores (4 core)	Screen	Jacket	Reel Length	Allied Code	RS order code
RTD	7/0.2mm	0.219	2x Red/2x White	Yes	Black	5 metres		185-3015
RTD	7/0.2mm	0.219	2x Red/2x White	Yes	Black	10 metres	70644773	492-9775
RTD	7/0.2mm	0.219	2x Red/2x White	Yes	Black	25 metres	70642885	290-4976

Overall sheath Dimension (approx.)

3.5mmØ