


FEATURES

- Quick and easy install
- Clean grey finish
- Up to 85°C operating temperature
- High impact/Warp proof
- 4mm slot gap

RS PRO Cable Trunking RS PRO Grey Slotted Panel Trunking - Open Slot, W40 mm x D60mm, L2m, PVC

RS Stock No.: 758-9222

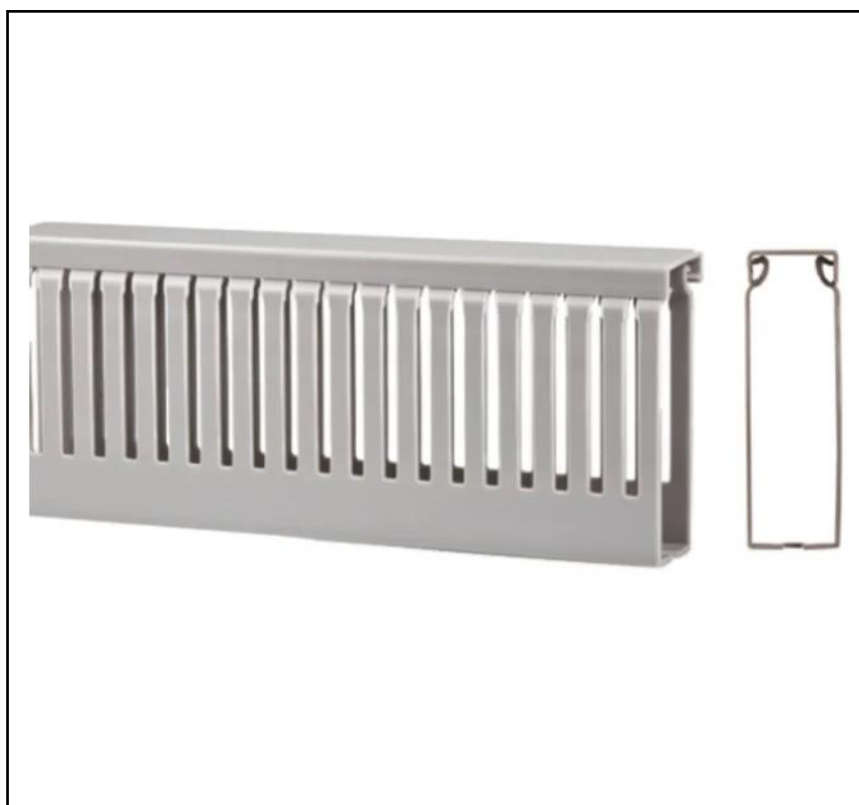

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO open slot industrial narrow trunking comes in grey PVC, giving that clean modern finish to any work area. Advantages to PVC cable trunking include high impact, warp-proof, self-extinguishing and the ability to wipe clean. The flat back allows you to fix it to the area the trunking will be applied to, allowing for a simple yet effective installation and secure cable organisation. Our trunking is a narrow box shape with a maximum operating temperature of 85°C, ideal for all of your cable and accessories management needs whilst providing that perfect finish.

General Specifications

Trunking/Chain Type	Slotted Panel Trunking
Material	PVC
Colour	Grey
Fire Behaviour	Self-extinguishing
Applications	Offices and indoor work spaces, at various lengths, Electrical workshops, Schools, Hospitals, Hotels and anywhere with customers walking amongst cables

Mechanical Specifications

Length	2m
Width	40mm
Depth	60mm
Slot Type	Open
Slot Gap	4mm

Operation Environment Specifications

Operating Temperature Range	Upto 50°C
Maximum Service Temperature	85°C

Approvals


Standards Met	CE, CSA, RoHS Compliant, UL 94 V-0, UL 94 V-2, UL E97527
----------------------	--

RS Stock Number	W (mm)	H (mm)	B (mm)
758-9204	25	30	6
758-9213	25	40	9
758-9216	25	60	13
758-9210	25	80	18
758-9229	40	40	11
758-9222	40	60	13
758-9226	40	80	10
758-9235	60	40	9
758-9238	60	60	13
758-9232	60	80	10
758-9241	60	100	15
758-9244	80	60	13
758-9248	80	80	13
758-9257	80	100	15
758-9250	100	40	11
758-9254	100	80	14
758-9263	100	100	16
758-9266	120	60	17

RS Stock Number	W (mm)	H (mm)	B (mm)
758-9260	15	25	6
758-9279	25	30	6
758-9272	25	40	10
758-9276	25	60	13
758-9285	25	80	19
758-9288	40	40	10
758-9282	40	60	13
758-9291	40	80	11
758-9294	60	40	10
758-9298	60	60	13
758-9308	60	80	11
758-9301	60	100	15
758-9305	80	60	13
758-9314	80	80	13
758-9317	80	100	15
758-9311	100	40	11
758-9320	100	80	13

Dimensions – mm

NARROW 4mm SLOT

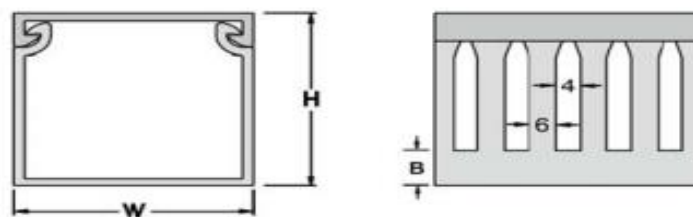

STANDARD 8mm SLOT

