


Product datasheet

Specifications

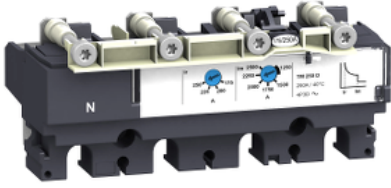

trip unit TM125DC, ComPact NSX 160 DC, thermal magnetic, 125 A rating, 4P 4d

LV438146

! Discontinued on: 30 September 2022

! To be discontinued

Main

Range	ComPact
Range of product	ComPact NSX100...250 DC
Product or component type	Trip unit
Trip unit name	TM-D
Trip unit technology	Thermal-magnetic
Range compatibility	ComPact NSX160 DC
Device application	Distribution
Number of poles	4P
Protected poles description	4t
Trip unit protection functions	LI
Protection type	L : for overload protection (thermal) I : for short-circuit protection (magnetic)
Trip unit rated current	125 A at 40 °C
[Ue] rated operational voltage	750 V DC
Network type	DC

Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable
[Ir] long-time protection pick-up adjustment range	0.7...1 x In
Long-time protection delay adjustment type tr	Fixed
Short-time protection pick-up adjustment type Isd	Fixed
[Isd] Short-time protection pick-up adjustment range	1250 A
Short-time protection delay adjustment type tsd	Fixed
Earth-leakage protection	Without

Environment

Standards	IEC 60947-2
-----------	-------------

Product certifications	KEMA ASEFA ASTA LCIE
------------------------	-------------------------------

Ambient air temperature for operation	-25...70 °C
---------------------------------------	-------------

Ambient air temperature for storage	-50...85 °C
-------------------------------------	-------------

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Weight	507.0 g
------------------	---------

Package 1 Height	6.5 cm
------------------	--------

Package 1 width	9.5 cm
-----------------	--------

Package 1 Length	15.0 cm
------------------	---------

Unit Type of Package 2	S03
------------------------	-----

Number of Units in Package 2	23
------------------------------	----

Package 2 Weight	12.148 kg
------------------	-----------

Package 2 Height	30.0 cm
------------------	---------

Package 2 width	30.0 cm
-----------------	---------

Package 2 Length	40.0 cm
------------------	---------

Offer Sustainability

Sustainable offer status	Green Premium product
--------------------------	-----------------------

REACH Regulation	REACH Declaration
------------------	-----------------------------------

EU RoHS Directive	Compliant EU RoHS Declaration
-------------------	--

Mercury free	Yes
--------------	-----

RoHS exemption information	Yes
----------------------------	---------------------

China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
-----------------------	---

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Circularity Profile	End of Life Information
---------------------	---

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)