

## Datasheet

# RS PRO 250 TYPE NON-INSULATED FEMALE DISCONNECTORS (LOOSE TYPE)

Stock number: **2055295**


MAXIMUM ELECTRIC CURRENT:

A.W.G.	20	18	16	14
AMP.	11	15	18	25

TERMINAL MATERIAL: BRASS

TERMINAL SURFACE TREATMENT: TIN PLATED

THICKNESS: 0.40MM

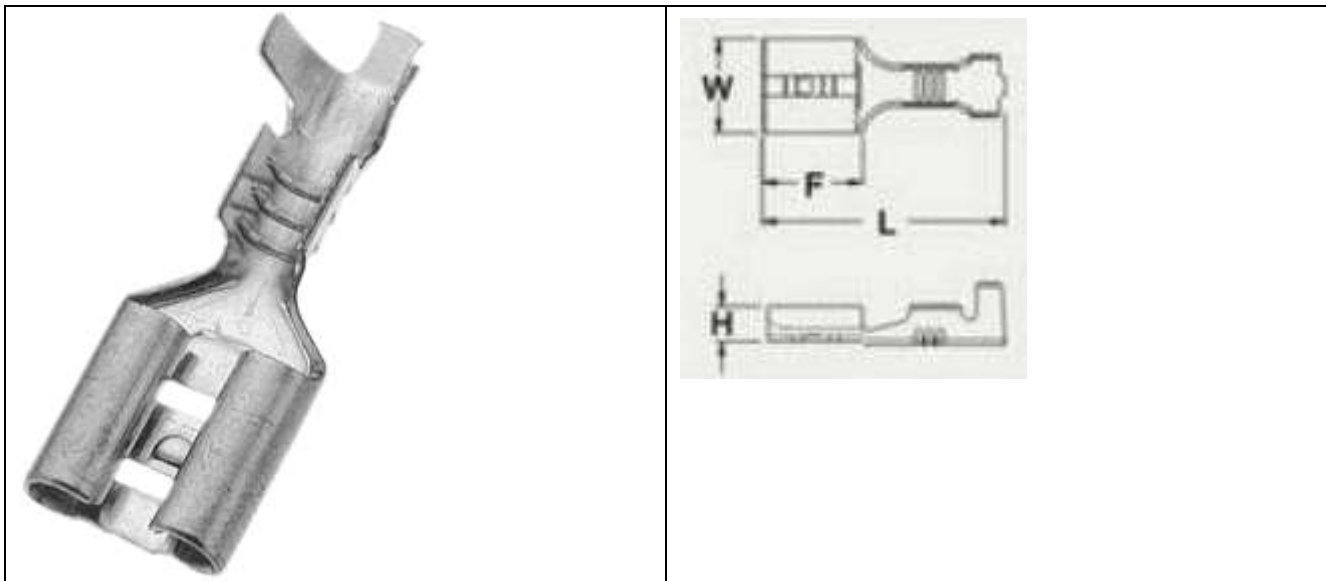

WIRE RANGE A.W.G. mm <sup>2</sup>	NEMA TAB  (6.35 x 0.8)	DIMENSION (mm)					MATERIAL	PLATINGS
		W	F	L	H	T		
20-14 A.W.G. 0.5-2.0 mm <sup>2</sup>	.250 x .032 (6.35 x 0.8)	7.6 0	7.6 0	19.1 0	3 0	0.4 0	Brass	Tin