

Features

- 8K
- HDMI-HDMI
- Male – Male
- Black
- 5 Pack

RS PRO 2mtr HDMI M-M 8K Cable – Black – 5 Pack

RS Stock No.: 2668480



RS Professionally Approved Products bring to you, professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RSPRO 2 metre male to male 8K HDMI cable which has a black PVC jack with mesh and an outer diameter of 7.3mm. The connectors have a gold flash covering to prevent corrosion.

The connector hoods are also made of Aluminium and sandblasted blue and has a strain relief to prevent the jacket splitting around the boot.

HDMI is possibly the most common display connection on the market which can be found on devices ranging from PC's, Blu-ray players, games consoles and more.

General Specifications


Cable Type	HDMI to HDMI
HDMI Version	HDMI 2.1
Connector A	Male HDMI
Connector A Gender	Male
Connector A Type	HDMI
Connector B	Male HDMI
Connector B Gender	Male
Connector B Type	HDMI
Maximum Resolution	8K @ 60Hz
Maximum Transmission Rate	48Gbps
Outer Sheath Material	Nylon Braided
Sheath Colour	Black
Hood	Moulding

Approvals

Declarations	CE UKCA REACH ROHS
Standards Met	CE UKCA REACH ROHS

Similar Products

Parameters	195-4891
Brand	RS RPO
Pack Size	1
Cable Type	HDMI
HDMI Version	2.1
Connector A	HDMI
Connector A Gender	Male
Connector A Type	HDMI
Connector B	HDMI
Connector B Gender	Male
Connector B Type	HDMI
Maximum Resolution	8K @ 60Hz
Outer Sheath Material	Nylon Braided
Sheath Colour	Black
Length	2mtr

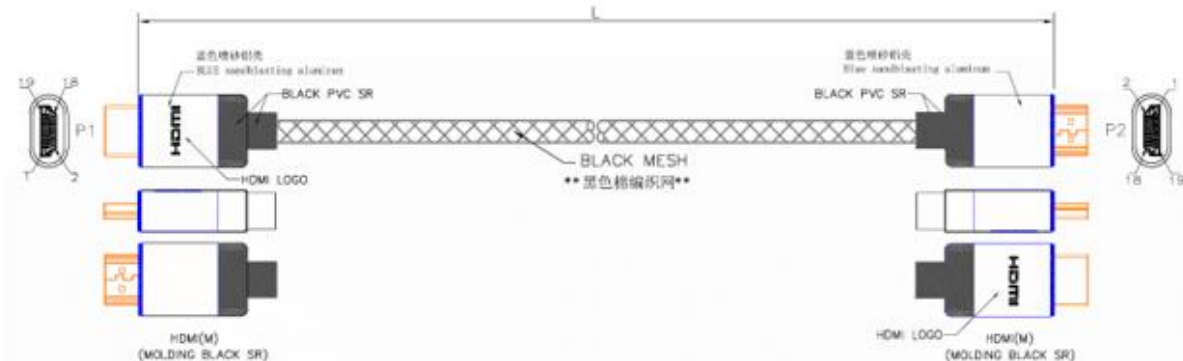

HDMI(M)	1	3	2	4	6	5	7	9	8	10	12	11	14	19	17	13	15	16	18	64
HDMI(M)	1	3	2	4	6	5	7	9	8	10	12	11	14	19	17	13	15	16	18	64
	PAIR		G	PAIR		G	PAIR		G	PAIR		G	PAIR		G	4C				SHELL

- CABLE: 28AWG(1/0.32BC),UL20276,AL+B+D-FOIL,[(#28*1P+D+FAM)*5PCS+#28*4C], BLACK COLOR,OD=7.3±0.2mm,PVC JACKET.
- LENGTH: L.
- CONNECTORS:HDMI(M)*2PCS(BLACK INSULATOR)(SHELL GOLD PLATED).
- MOLD:MOLDING TYPE.
- CONTACTS:
- Test machine test condition.
 - 100% OPEN,SHORT&INTERMITANCE TEST.
 - CONDUCTOR RESISTANCE: 2ohms MAX:
 - INSULATION RESISTANCE:10MΩ Min/,10ms:
- ALL MUST BE MEET ON ROHS COMPLIANT.