


## Datasheet

# Connecting ESD Grounding Cord

RS Stock number [287-7391](#)

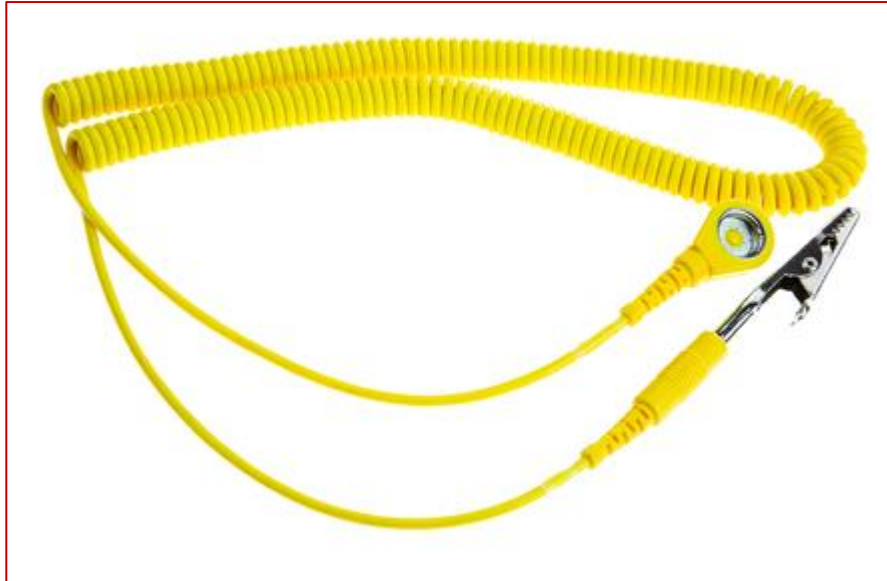

### Description

- High quality long life yellow coil cord, insulated with PU material
- Integral 1M $\Omega$ , 2M $\Omega$  or 4M $\Omega$  resistor
- Soft polyurethane strain relief
- The body housing contains 10mm female snap, with or without resistor joined in series to the conductor with ribbed banana plug, crimped or moulded eyelet, or another snap on the other end.
- The ground end of the cord possesses PU strain relief assembly with nylon encapsulated body housing. Moulded snap body is with tear-drop design.
- The cord conductor shall have an end to end resistance not greater than 2 ohms.
- Supports ESD S20.20 and EN 61340-5-1 ESD control programme compliance
- Note: Wrist bands and cords must be ordered separately.



### Specifications

- Cord Length
  - Cord Style
  - Cord Type
  - Lead Resistance
  - Stud Size
  - Termination Type
- 3.6mm
  - Coiled
  - Connecting
  - 2M $\Omega$
  - 10mm
  - Press Stud - Banana Plug/Croc Clip