
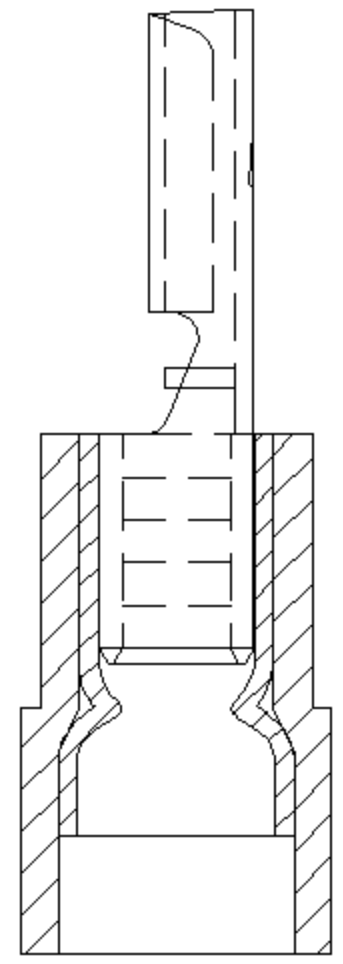
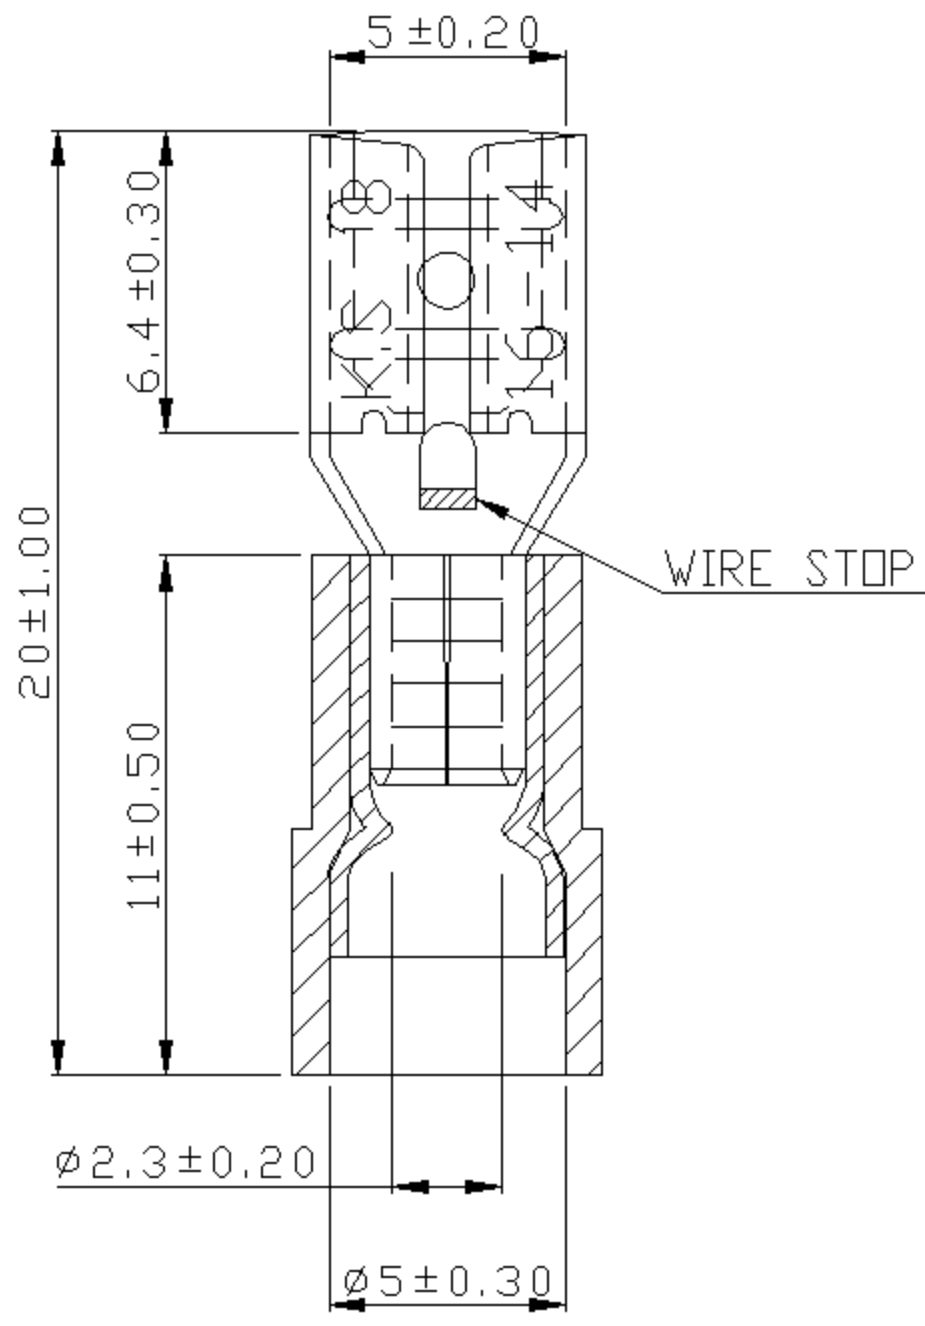


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

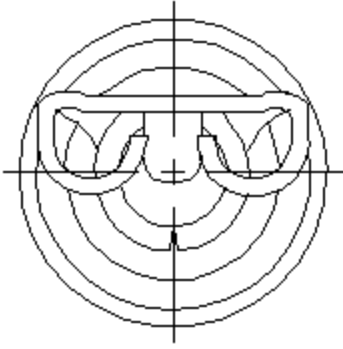

NOTE:

1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	16	14	
AMP.	10	15	
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 16-14 A.W.G.( 1.5-2.5 mm<sup>2</sup>)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
9. NEMA TAB : 0.032 \* 0.187 (0.8 \* 4.75)
10. TERMINAL THICKNESS : 0.35 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	±
30 > 75 mm ± 0.50	±

NAME	NYLON-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS			UNIT	
PART NO.	FDNYD2-187(8)	MATERIAL	-----	APPROVE	
NUMBER	KA-951106-C	SCALE	SHEET	PAGE	CHECKED
DATE	2006/09/06	4/1	1-0	10F2	DRAWN 張馨尹



A B C D E F G H