


LED PENDANT LIGHT



EG SERIES



Key Features

- Complete solution with heat sink, driver and polycarbonate diffuser
- Vibration-resistant
- Alternative to 300W incandescent bulb
- Energy savings of up to 90% compared to 300W incandescent bulb
- Long service life of 30,000 hours L70 @ 40°C
- Safety, EMC and IEC compliance

Application

Engine rooms, Low visibility areas, Decks, Warehouses, Yards

Material




Marine grade aluminium alloy with powder coating, comes with polycarbonate diffuser and guard

Options

Polycarbonate clear
Polycarbonate red

Weight

1.5Kg

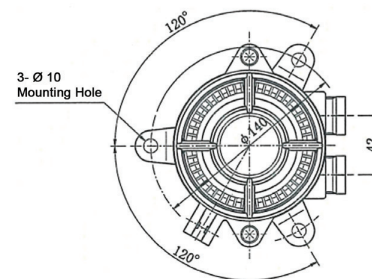

TECHNICAL SPECIFICATIONS



Ideal Replacement:

Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp	System Lumen
EG-LMU03050	100V ~ 240V AC/DC	30W	5,000K	180°	-30 ~ 40°C	2,900lm

Also available in other CCT.

