


NO	DESCRIPTION	DATE
⚠	BACKGROUND FORMAT UPDATED	03.15.04'
⚠	BACKGROUND FORMAT UPDATED	10.04.08'
⚠	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	05.19.15'

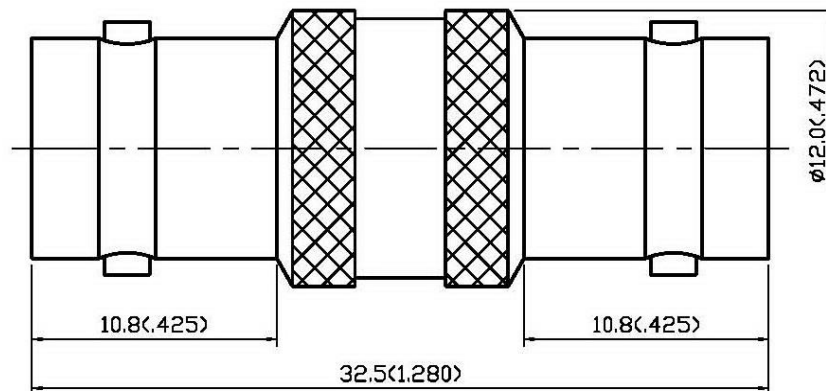

### 1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-1 GHz

1.2 NOMINAL IMPEDANCE: 75 OHMS

1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚠

### 2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604

2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300

2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

### 3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 ENVIRONMENTAL

4.1 OPERATING TEMPERATURE RANGE: -85° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
4	WASHER	BRASS	1	SILVER 70μ" MIN.
3	INSULATION	TEFLON	2	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	SILVER 70μ" MIN.
1	BODY	BRASS	1	SILVER 70μ" MIN.



APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		STRAIGHT BNC JACK-JACK ADAPTER		品名		13-32-1 T.S.S		日期	DATE	版次	REV.
製圖	DRAWN	TOLERANCE	.X	±0.2	TITLE	\ROHS COMPLIANT <75Ω>		01.13.95'		A-3	
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO. 13-0298					
認圖	APPROVAL	.XXX	±0.05	比例	SCALE						
定	Jenny	ANGLE	±5°	比例	4:1						