


## Insulated socket 1/2", long type - 190/2LVDEDP

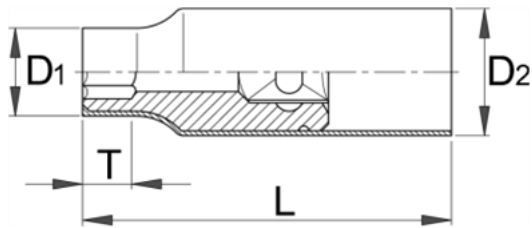

### Description

- material: chrome vanadium
- drop forged, entirely hardened and tempered
- head: chrome plated according to ISO 1456:2009
- made according to standard EN60900

### Advantages:

- double layered - double coloured insulation for additional safety
- controled with electrical test

### Important!






- if second layer is visible, replace your VDE tool with a new one.

### Technical Data

Barcode	Hex	Length ↑	D1	D2	T	Weight	Color	Material	Notes
61910 4	10	96	20.7	27	27	116	4B	5	-
61910 5	11	96	21.6	27	27	116	4B	5	-
61910 6	12	96	22.6	27	27	123	4B	5	-
61910 7	13	96	23.3	27	27	127	4B	5	-
61910 8	14	96	25.8	27	35	134	4B	5	-
61910 9	15	96	26.8	27	35	132	4B	5	-
61911 0	16	96	27.4	27	35	143	4B	5	-
61911 1	17	96	30	27	35	151	4B	5	-
61911 2	18	96	31.7	27	35	174	4B	5	-
61911 3	19	96	32	27	35	170	4B	5	-
61911 4	20	96	33.4	27	35	200	4B	5	-
61911 5	21	96	33	27	35	188	4B	5	-
62160 4	22	96	33.6	29.6	35	213	4B	1	-
62160 5	24	96	35.6	31.6	35	238	4B	1	-

### Packaging data

Barcode	Hex	Retail tool packaging				Transport package				
		Retail packaging in mm (length)	Retail packaging in mm (width)	Retail packaging in mm (height)	Weight	Transport packaging in mm (length)	Transport packaging in mm (width)	Transport packaging in mm (height)	Weight	
61910 4	10	170	44	42	120	4	85	288	52	525
61910 5	11	170	44	42	120	4	85	288	52	525
61910 6	12	170	44	42	130	4	85	288	52	580
61910 7	13	170	44	42	135	4	85	288	52	600
61910 8	14	170	44	42	140	4	85	288	52	620
61910 9	15	170	44	42	140	4	85	288	52	620
61911 0	16	170	44	42	150	4	85	288	52	660
61911 1	17	170	44	42	158	4	85	288	52	690

		Retail tool packaging					Transport package				
		Retail packaging in mm (length)	Retail packaging in mm (width)	Retail packaging in mm (height)			Transport packaging in mm (length)	Transport packaging in mm (width)	Transport packaging in mm (height)		
61911 2	18	170	44	42	180	4	85	288	52	780	
61911 3	19	170	44	42	181	4	85	288	52	780	
61911 4	20	170	44	42	207	4	85	288	52	890	
61911 5	21	170	44	42	207	4	85	288	52	890	
62160 4	22	170	44	44	220	4	85	288	52	940	
62160 5	24	170	44	44	264	4	85	288	52	1115	