

## Long Range USB VGA KVM Console Extender over Cat5 UTP - 1000 ft


StarTech ID: SV565UTPUL



The SV565UTPUL Long Range USB VGA KVM Console Extender over Cat5 UTP (1000 ft) lets you control a server, computer or multiple computers (connected through KVM Switch) over a standard Cat5 or Cat6 UTP network cable connection, at distances of up to 1000ft (300m) away.

You can use your existing USB keyboard, USB mouse, and monitor to access both the server room and your office computer, saving space and avoiding the need for a dedicated remote console by allowing you to switch between workstation view and KVM view at the remote location.

The SV565UTPUL gives you long range control of any VGA + USB computing device:

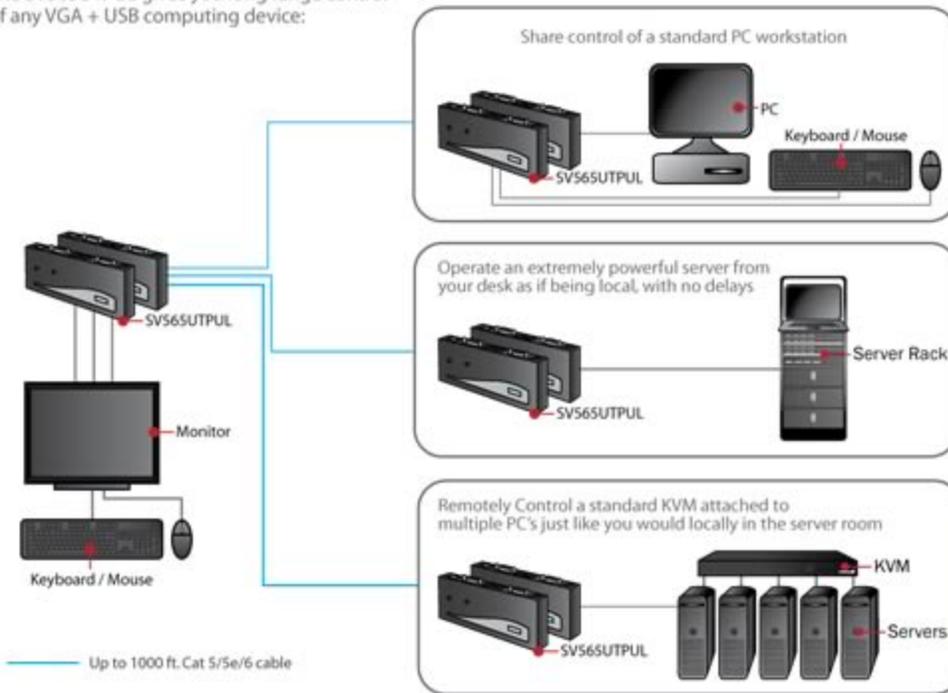

Backed by a StarTech.com 3-year warranty and free lifetime technical support.

## Applications

- Control remote machines and security monitoring systems
- Monitor computer-controlled equipment in a factory or warehouse at a distance
- Use one or more servers in a server room from a remote location
- Allow two users to share one PC or KVM

## Features

- High resolution support: Up to 1920x1200(WUXGA)/ 1600x1200(UXGA)
- Kit includes both local and remote units
- Compatibility mode enables hotkey commands to be passed to connected StarView KVMs
- Max Resolution Limit feature caps the resolution to prevent the resolution setting from exceeding the capability of the connected display
- USB computers are supported at the host and remote locations (USB keyboard and mouse required for remote console)
- Supports auto-switching between host and remote users or dedicated control
- Compatible with CAT 5, 5e, or 6 UTP cabling
- Intuitive hotkey commands
- Hotkey controlled Equalizer(sharpness), Gain(brightness), and RGB Skew adjustments
- Supports most combo keyboard and mouse sets (including Wireless)
- PS/2 and USB host PC's supported via the appropriate PS2 or USB KVM cable (USB style included)

Technical Specifications

Warranty	3 Years
Audio	No
Cables Included	Yes
KVM Ports	2
Multi-Monitor	No
PC Interface	USB
PC Video Type	VGA
Rack-Mountable	No
IP Control	No
Max Transfer Distance	300 m (984 ft)
Maximum Analog Resolutions	UXGA - 1600x1200, WUXGA - 1920x1200
Port Selection Support	Push Button and Hotkeys
Wide Screen Supported	Yes
Console Interface(s)	2 - VGA (15 pin; High Density D-Sub) Female
Console Interface(s)	4 - USB A (4 pin) Female
Host Connectors	2 - VGA (15 pin; High Density D-Sub) Female
Other Interface(s)	2 - RJ-45 Female
OS Compatibility	OS independent; No software or drivers required
<b>Note</b>	Supports most combo keyboard and mouse sets (including Wireless)
LED Indicators	2 - Local indicator
LED Indicators	2 - Remote indicator
Center Tip Polarity	Positive
Input Current	0.8A
Input Voltage	110 ~ 240 AC
Output Current	1.5A
Output Voltage	12 DC
Plug Type	M
Power Source	AC Adapter Included
Humidity	0~80% RH
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Color	Black
Enclosure Type	Steel

Product Depth	70 mm [2.8 in]
Product Height	20 mm [0.8 in]
Product Weight	1500 g [52.9 oz]
Product Width	157 mm [6.2 in]
Shipping (Package) Weight	1700 g [60 oz]
Included in Package	2 - KVM Extenders (1x Local, 1x Remote)
Included in Package	2 - 2n1 USB VGA KVM Cables
Included in Package	1 - Rubber Feet
Included in Package	1 - Universal Power Adapter (NA/EU/UK) and AU in Australia
Included in Package	1 - User Manual

### Certifications, Reports and Compatibility

