

## **FEATURES**

- Dust poof and watertight,
   IP67 rated
- 360 degree shielding
- Full metal shield between pairs of wires
- Insulation Resistance >= 100 MΩ
- Brass nickel plated coupling nut
- Data Transmit Rate upto 10 Gbit/s

# RS PRO M12 MALE TO MALE STRAIGHT X-CODED 8 PIN 8 WIRE SHIELDED 5m TEAL PUR CAT6A CABLE

RS Stock No.: 2067664



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

# RS PRO M12 MALE TO MALE CONNECTOR



# Product Description ATTRIBUTE 1

RS PRO Patch Cords, M12 Series, 8 Way, X Coded

From RS PRO, these M12 patch cables are ideal for ethernet applications. The X-coded CAT.6A cable assemblies can transmit data rates of up to 10 Gbit/s, and with a M12 circular Moulded connector, they resistant to vibration and ideal for industrial environments.

Offered in M12 to M12 and M12 to RJ45 versions in a variety of lengths, the M12 X-coded of 8 way can be used for many applications, such as security and video surveillance systems, production and manufacturing, renewable energy or use with railway vehicles data systems.

#### Features and Benefits:

- Dust poof and watertight, IP67 rated
- Brass nickel plated coupling nut
- 360 degree shielding
- Insulation Resistance >= 100  $M\Omega$
- Full metal shield between pairs of wires

#### **General Specifications**

Rated Operational Voltage	50 V AC / 60 V DC
Current Rating	0.5A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C +75°C
Coding	X-Coded

### **Material Specifications**

Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
Grip Color	Black
Coupling Nut	Brass Nickel-Plated
X-shell	Zinc Alloy

# RS PRO M12 MALE TO MALE CONNECTOR



# **Cable Specifications**

Cable Length-L	5 m			
Cable Type	Cat6A (4 x 2 Twisted Pair) PUR Shielded			
Sheath Color	Teal			
Cross Section of Wire	AWG 26/7			
Cable Dia	6.8 ± 0.1 mm			
Transfer Parameters	CAT6A			
Transfer Rate	10 Gbit/s			

# **Protection Category**

Degree of Protection IP67	Degree of Protection	IP67
---------------------------	----------------------	------

# **Additional Information**


# **Approvals**

# **Similar Products**

Stock No.	Brand	Product Name	Attribute 1	Attribute 2
xxx-xxxx	RS PRO	RS PRO M12 Male to Male Straight X-Coded 8 Pin 8 Wire Shielded 1m Teal PUR CAT6A Cable	M12 X-Coded Ethernet Cable Connector	M12 X-Coded 8 pin Ethernet Connector with CAT6A Cable
xxx-xxxx	RS PRO	RS PRO M12 Male to Male Straight X-Coded 8 Pin 8 Wire Shielded 10m Teal PUR CAT6A Cable	M12 X-Coded Ethernet Cable Connector	M12 X-Coded 8 pin Ethernet Connector with CAT6A Cable



# Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

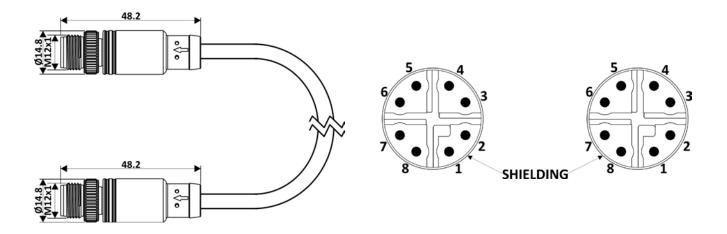

All Dimensions are in mm.

