



Benefits

- New generation of luminaires to replace T5 and T8 modular fluorescent louvre fitting
- Low UGR<19, provides greater visual comfort
- Delivers an efficient batwing distribution of light to achieve uniform illumination on a surface

Application



Model	Item Description	W	PF	lm	lm/W	CRI	Beam Angle	Life (hrs)	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
FPL62400v0	ESTELA PANEL 30W 2X2 4000K 90D	30	0.9	3500	117	80	90°	50000	640*650*50	670*670*220	4
FPL62400v0	ESTELA PANEL 30W 2X2 6500K 90D	30	0.9	3500	117	80	90°	50000	640*650*50	670*670*220	4
FPL62500v0	ESTELA PANEL 30W 1X4 4000K 90D	30	0.9	3500	117	80	90°	50000	1230*350*50	1250*370*220	4

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White
IP	IP20
IK	IK02
Driver integrated (Yes/No)	Yes


Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	Reflector
Housing Material	Aluminum


Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	20°C
Storage Environment	-20°C~40°C

Photometric Data

FPL62400v0

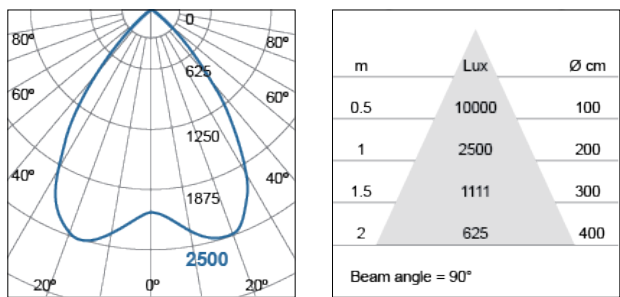

FPL62500v0

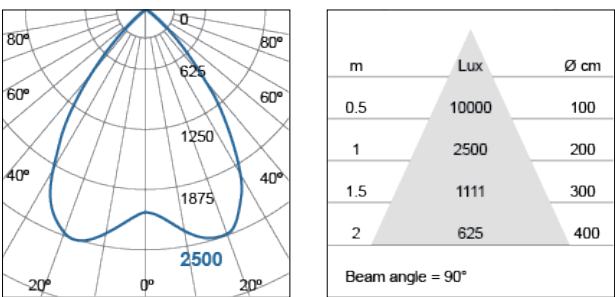

Dimensional Drawing

