

The ST-35 model is selected in the red box, with one side outlet.

The blue box selects the ST-37 model, with side outlets.

If the customer needs to keep it closed, both options are acceptable. But they are all single sided outgoing lines, and often closed can't do double sided outgoing lines.


The ST-35 was originally normally open, but if you choose this model, you need to add an intermediate relay inside to turn it from normally open to normally closed.

ST-37 was originally normally closed and does not require conversion.

Only normally open can be used for bilateral outgoing lines.  
Customers usually choose the ST-37 model with a normally  
closed return.

**37**

**ST-37(注 1)**

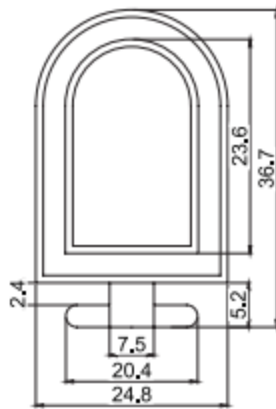


**5-7mm**

**50-70N**

**35**

**ST-35(注1)**

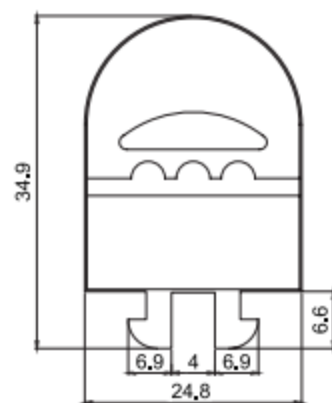

**5-7mm**

**50-70N**