


# Datasheet

## Snap Mounting Inlet

RS Stock 896-2127

### Dimensions: (mm)

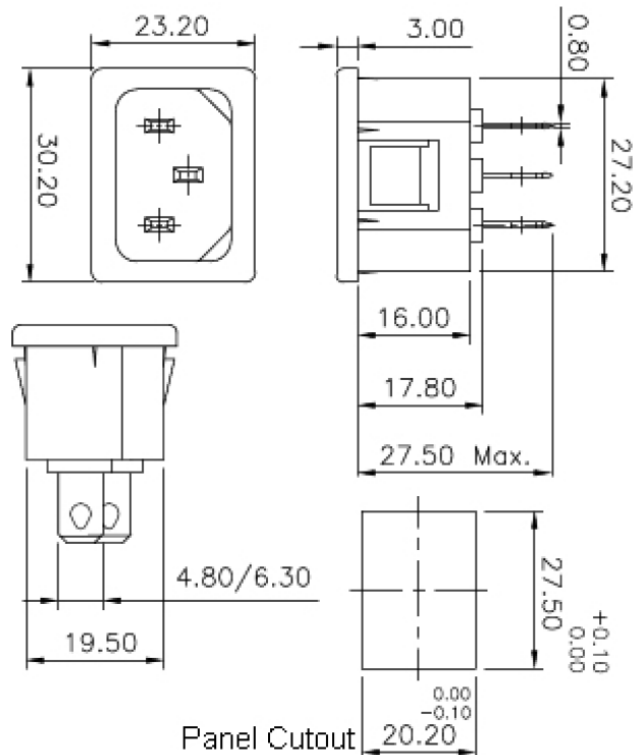

### Specifications

Current & voltage rating:	10Amp (VDE), 15Amp (UL, CSA), 250VAC
Product Description:	IEC Inlet with snap mounting
Panel thickness:	Standard - 1.5, Other - On request
Permissible temperature - For soldering:	270 deg.C for 5 seconds max.
Permissible temperature - With/without load:	0 to 70deg. C
Approvals:	UL(C, US), VDE, CE
Reference Standard:	IEC 60320-1
Material - Body:	Nylon-6, 20% GF, V2
Material - Terminals:	Copper Alloy, Tin plating
Terminals:	Solder-type / Fast on 6.3X0.8
Mounting:	Panel, Snap-in type
HV Breakdown test for 1 Minute:	2 KVAC
Insulation Resistance at 500 VDC:	1000 Mohms min.
Contact Resistance (Initial):	10 mohms max.