



ENGLISH

Wiring Instructions

RS Pro IP2X Junction Box

Stock No: 776-7652

Wiring Accessories

Fitting and Wiring Instructions


Junction Boxes

- 1). Before commencing work, isolate the mains power supply and remove the fuse in the fuse box or switch off the circuit breaker in the consumer unit.
 - 2). If unit is to be used as a replacement for an existing product, remove existing unit from its location and disconnect the wiring.
 - 3). These products must be installed in accordance with the latest Building and IEE wiring regulations.
- If in any doubt, please contact a qualified electrician.

The terminals of Junction Boxes can be used for any polarity. Remove the central screw and remove cover to expose terminals. In multi-terminal junction boxes, take care to use only one polarity in any one group of terminals. Position the way the cable lies, so as to pass through one of the apertures in the side of the base. When cable installations are complete, position the cover so as to block off the cable entry apertures not used in the base and tighten the screw.

Typical Layout of a 4 Terminal Junction Box Shown Below

Junction boxes

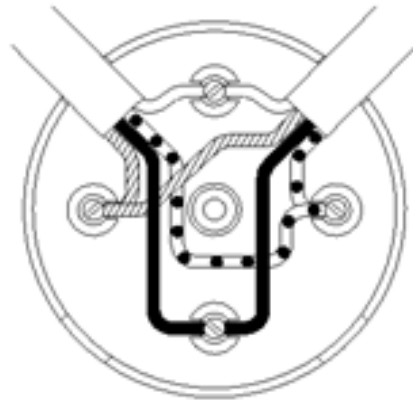

-  YELLOW OR GREY
-  RED OR BROWN
-  BLACK OR BLUE
-  GREEN/YELLOW SLEEVING