

FEATURES

- All fluids usable in aggressive environment
- Mechanical resistance
- Silicon free

RS PRO In Line Flow REG 316L F-F 1/4

RS Stock No.: 2312710



RS PROfessionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Pneumatic Function Fittings



Product Description

The RS PRO in line flow regulator 316L f-f 1/4 works in 0.2 bar to 25 bar pressure range. It is mainly used in chemical, petrochemical, life & sciences, inert gases and vacuum applications. It is also usable in salty environment and on machines that need frequent washing with aggressive detergents. RoHS and REACH compliant.

General Specifications

| Туре | Threaded |
|-------------|---|
| Application | Chemical, Petrochemical, Life & Sciences, Inert Gases And Vacuum Applications |


Mechanical Specifications

| Maximum Outlet Pressure | 25bar |
|-------------------------|-------|
| Length | 36mm |

| Inlet Port | Port | | |
|-----------------|---------------|--|--|
| Inlet Port Type | 1/4 in Female | | |
| Tube Inlet Port | 1/4 in Female | | |

| Outlet Port | |
|------------------|----------------|
| Tube Outlet Port | Flow Regulator |



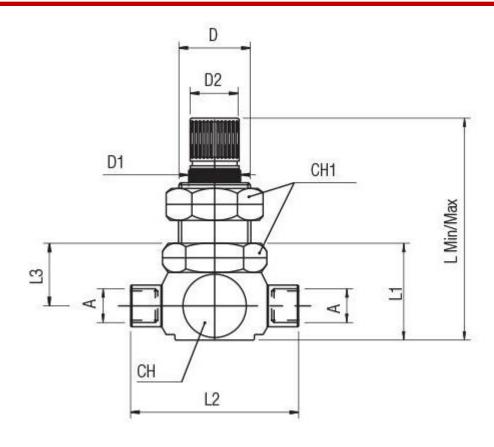

| Α | L Min/Max | L1 | L2 | L3 | СН | CH1 | D | D1 | D2 | Pack. |
|-----|-----------|----|----|------|----|-----|----|----|----|-------|
| 1/4 | 77/82 | 36 | 42 | 21.5 | 22 | 20 | 15 | 14 | 12 | 2 |