

Datasheet

RS PRO UL1569 Red, 0.2 mm² Hook Up Wire, 100m

Stock No: 2075310



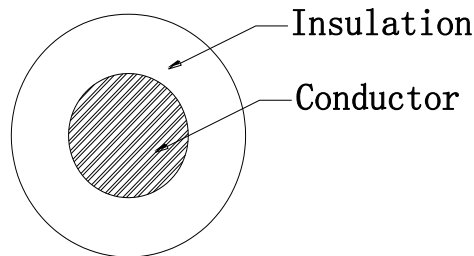
Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	24AWG
Construction(±0.008mm)	7/0.20
Stranded Dia.(mm)	0.61
Insulation Material	PVC
Insulation Color	Red (RAL3018)
Ave Thickness(mm)	0.41
Min Thickness(mm)	0.33
Insulation Dia.(±0.10mm)	1.42

Features & Benefits:

- **Rated temperature: 105 °C**
- **Conductor resistance(20°C Ω /km): 86Max.**
- **Insulation DC Resistance(20°C $M\Omega \cdot Km$): 200Min.**
- **Rated Voltage: 300V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 1569 24AWG
105°C 300V VW-1  AWM I A 105°C 300V FT1 -LF-
ELETECK

Applications: It is designed for general applications, for internal appliance wiring