

FEATURES

- Optimized NKE design
- 2 Ribs on outer ring
- 1 fixed rib and 1 loose rib on inner ring
- Glass fibre reinforced polyamide cage
- Single row cylindrical roller bearing

Cylindrical Roller Bearing 20x47x14mm

RS Stock No.: 2483021



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Cylindrical Roller Bearings




Product Description

A range of RS Pro single row Cylindrical Roller Bearings, offering versatility and overall high performance. RS Pro Cylindrical Roller bearings utilise either a Polyamide or Brass cage and optimised internal geometry to ensure adequate operation.

General Specifications

| Bearing Type | Single Row Cylindrical Roller Bearing |
|----------------|---------------------------------------|
| Number of Rows | 1 |
| Material | Steel |
| Cage Material | Glass fibre reinforced polyamide |
| Race Type | Cylindrical |
| Outer Rib Type | 2 Ribs |
| Inner Rib Type | 2 Ribs, (1 loose, 1 fixed) |
| Bore Type | Cylindrical |
| Application | Pumps, Gearboxes, Motors |



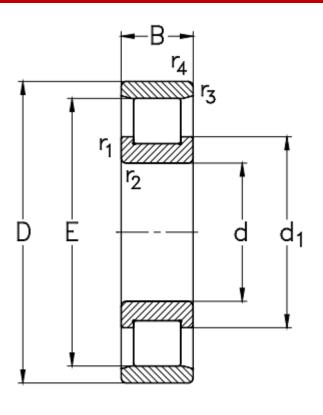

Ν...

Mechanical Specifications

| Inside Diameter (d) | 20mm |
|----------------------------|----------|
| Outside Diameter (D) | 47mm |
| Width (B) | 14mm |
| Diameter Under Rollers (E) | 26.5mm |
| Dynamic Load Rating | 27.6kN |
| Static Load Rating | 24.9kN |
| Limiting Speed | 19000rpm |
| Mass | 0.13kg |

Operation Environment Specifications

| Temperature Range | Up to 150°C |
|-------------------|-------------|
| | |



INCLUDES WITH PRODUCT / STANDARD ACCESSORIES / CONSTRUCTIONAL DIAGRAM