

Datasheet

RS PRO NON-INSULATED RING TERMINALS


Stock number: 178-8596

MAXIMUM ELECTRIC CURRENT:

| | | | | |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP. | 9 | 12 | 17 | 18 |

TERMINAL MATERIAL: COPPER

SURFACE TREATMENT: TIN PLATED

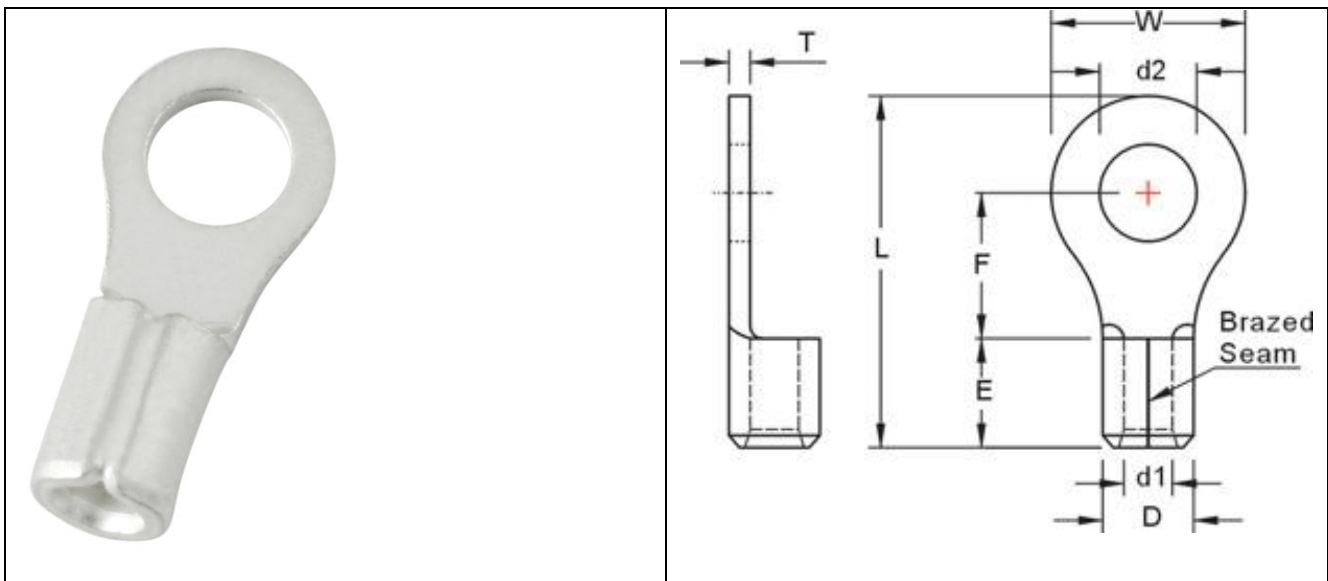

| WIRE RANGE A.W.G. mm ² | ITEM NO. BRAZED SEAM | STUD SIZE 2 x d2 | DIMENSION inch(mm) | | | | | | | |
|---|-------------------------|---------------------|--------------------|-------|-------|-------|-------|-------|-------|------|
| | | | W | F | L | E | D | d1 | T | |
| 22-16 A.W.G. | 178-8596 | 1/4 | 0.252 | 0.457 | 0.433 | 0.858 | 0.189 | 0.134 | 0.067 | 0.03 |
| 0.5-1.5 mm ² | | | 6.4 | 11.6 | 11 | 21.8 | 4.8 | 3.400 | 1.7 | 0.75 |