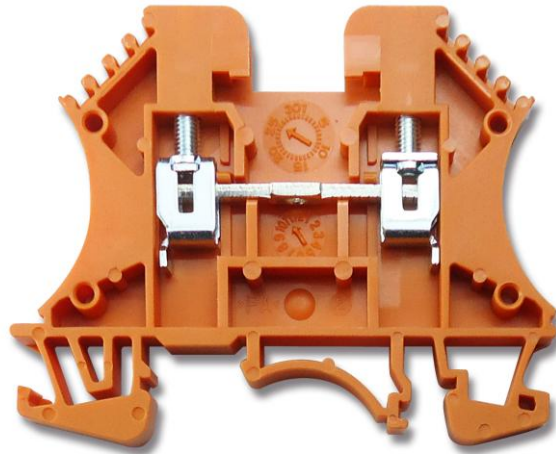


Datasheet









Stock No: 913-1207

Screw Clamp Terminal Blocks, 2.5sq.mm

24A, 600V, 22-10 AWG, 0.5-2.5 sq.mm, Orange



Specifications:

Specifications	2.5mm ²
Technical Data	Rated voltage / Rated current / Wire size
UL	600V / 24A / AWG 22-10
CSA	600V / 24A / AWG 22-10
IEC	800V / 24A / 0.5-2.5mm ²
Insulating impulse voltage withstand/pollution degree	8KV / 3
Torque (in -lbs)	7
Clamping Screw (M)	M3
Insulation stripping length (mm)	10~12 mm
Net weight per piece	7.8g
Material / Available Color (Standard Color: Beige)	 Red 913-1201 Orange 913-1207 Beige 878-7487 Blue 878-7499 Black 878-7496
Rail Dimensions	T / W / H (mm)
For TS35x7.5 	5.1 x 60 x 47.5
For TS35x15 	5.1 x 60 x 54.8
Accessories	Cat. No.
End Bracket 	878-7553
	878-7556
End plate 	878-7540
Cross 	878-7572
	913-1305
Marking Tags 	878-7590

Dimensions in mm:

