


REF : MULTI 275 + n B

TRANXALARM® flexible alarm cable – 2x0,75 mm² + nx0,22 mm²

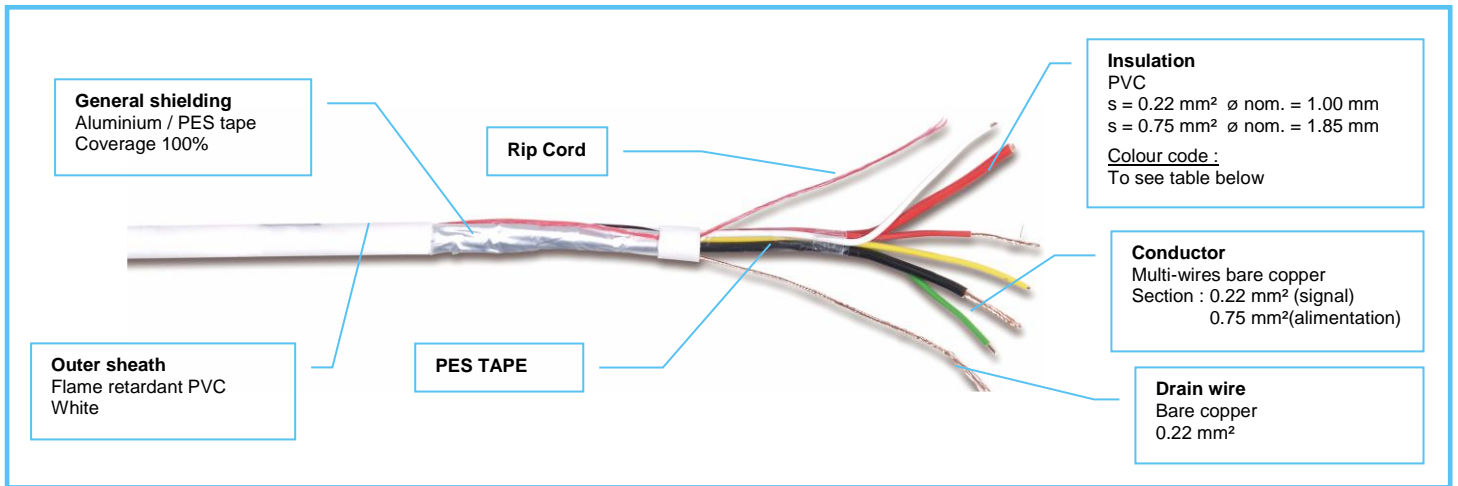

PRODUCTS INFORMATIONS

Application

The 0.22 mm² series is constituted by flexible multiconductors cables.

Insulation colour code

Conductors 0.22 mm ²		Conductors 0.75 mm ²	
1	White	1	Red
2	Red	2	Black
3	Yellow		
4	Green		
5	Grey		
6	Orange		
7	Light blue		
8	Brown		

Electrical properties

Max. working Voltage : 0.22 mm² = 200 V
0.75 mm² = 250 V


Test voltage : 0.22 mm² = 1200 V
0.75 mm² = 2000 V

Mean electrical resistance at 20°C : 0.22 mm² = 96 Ω/km
0.75 mm² = 26 Ω/km

Characteristics



Flame behaviour :
IEC 60332-1 or NF C 32-070 Cat C2



Temperature range :
- 10°C → + 70°C



Minimum bending radius :
10 x Ø







According to RoHS standard

REF : MULTI 275 + n B

TRANXALARM® flexible alarm cable – 2x0,75 mm² + nx0,22 mm²

Products references

			
MULTI 275 + 4 B	(4 x 0.22) + (2 x 0.75)	5.5	62
MULTI 275 + 6 B	(6 x 0.22) + (2 x 0.75)	6.0	70
MULTI 275 + 8 B	(8 x 0.22) + (2 x 0.75)	6.7	79
MULTI 275 + 10 B	(10 x 0.22) + (2 x 0.75)	6.8	90