




Datasheet

Power Supply

12Vdc 5Amp Range

ENGLISH

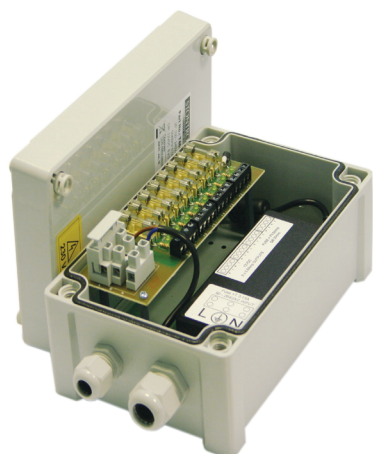

Features

- Universal Mains Input
- IP66 Rated Weatherproof Unit
- Tightenable glands for IP & OP wires
- Multiple Outputs Protected by Quick Blow Fuses
- Wall Mountable
- RoHS Compliant
- MTBF >50,000 hours

RS Stock Number	Manufacturers P/N	Output Voltage	Output Current (Min)	Output Current (Max)	Power (Watts)	Line Regulation	Voltage Tolerance
8280162	T4653AD	12Vdc	0A	4 x 1A	60W	+/- 1%	+/- 5%
8280166	T4654AD	12Vdc	0A	8 x 0.5A	60W	+/- 1%	+/- 5%

Input

- Rated Input 100 - 240Vac
- Rated Input Frequency 47 to 63Hz
- Efficiency >74%
- Re-Wireable Terminal block for L - E - N wires

Output

- Re-Wireable Terminal Block for 0Vdc & 12Vdc wires

Environmental

- Operating Temperature 0°C to 40°C
- Storage Temperature -20°C to 70°C
- Operating Humidity 20% to 90%
- Storage Humidity 0% to 90%

Casing

- Dimensions 230mm x 143mm x 57mm
- Weight 800g (approx.)