

FEATURES

- Single handed operation
- Light and compact
- Safety version
- Silicon free

RS PRO SOCKET WITH REST FOR RUBBER HOSE ISO 6150 A6

RS Stock No.: 2312495



RS PROfessionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO socket with rest for rubber hose works in 0 to 10 bar pressure range. It mainly used in compressed air & tools, pneumatic & fluid technology, food & beverages. It is available in nickel-plated brass. Used for compressed air and for moulding injection cooling system. RoHS and REACH compliant. Operating temperature range is from - 20 °C to + 80 °C.

General Specifications


Coupling Type	Straight
Body Material	Brass
Application	Compressed Air, Pneumatic Automation, Textile, Packaging, Handling

Mechanical Specifications

Maximum Working Pressure	10bar
Connector Gender	Female
Hose Outer Diameter	13mm
Wrench Size	11mm

Similar Products

Parameters	2312502	2312503
Brand	RS PRO	RS PRO
Coupling Type	Straight	Straight
Body Material	Brass	Brass
Maximum Working Pressure	10bar	10bar
Connector Gender	Male	Male
Hose Inner Diameter	4mm	6mm
Hose Outer Diameter	11mm	11mm
Application	Compressed Air, Pneumatic Automation, Textile, Packaging, Handling	Compressed Air, Pneumatic Automation, Textile, Packaging, Handling

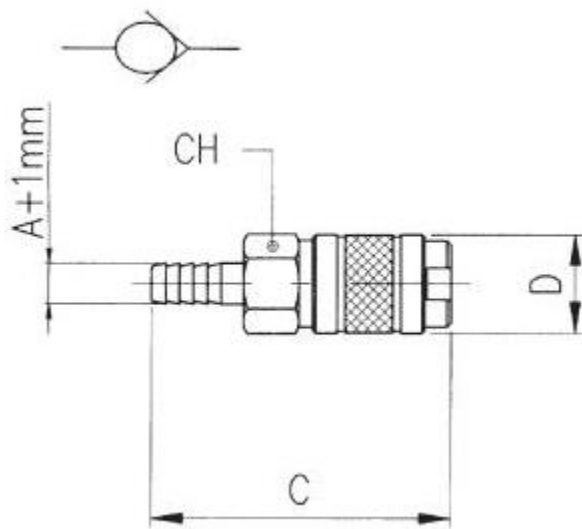

A	C	D	CH	Pack.
4	46.5	13	11	10