




KPR®



BRINGING TECHNOLOGY INTO SAFETY

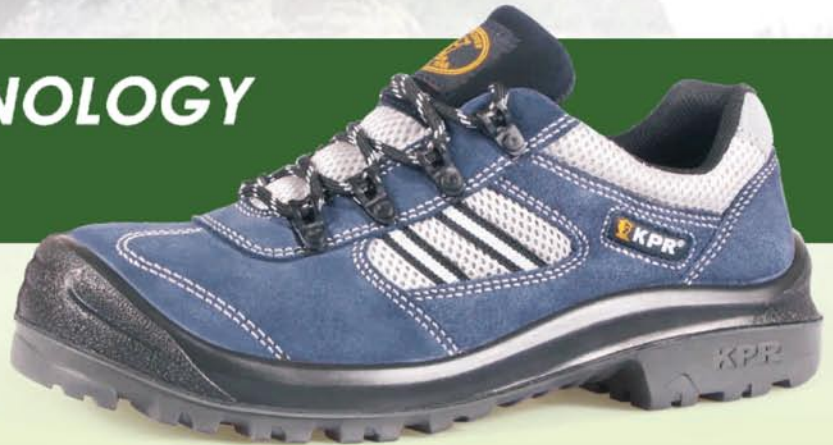

• PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards. Protective scuff toe was designed to help protect and prolong the life of the safety shoe. Non-metallic anti-perforation midsole for work environments that require protection from sole penetration.



TOE
PROTECTION



ESD



SLIP
RESISTANCE



LIGHT
WEIGHT



SOLE
PROTECTION



ABRASION
RESISTANT



OIL
RESISTANT

• UPPER

Suede leather with mesh breathable textile
Full Inner Lining
Light Weight



• OUTSOLE

Injected Polyurethane with special formulated Rubber provide both work functionality, comfort, light weight, and non-marking. New Innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED

Removable Dual Density Air PU foam footbed. Dual cushioning for maximum comfort, arch stability, and air channel system for healthier environment.



SPECIFICATIONS

Model	M-017B
Safety Toe	Composite toe cap
Sole protection	Non-metallic anti-perforation board
Electrical feature	ESD
Material	Suede leather
Color	Navy
Lining	BK mesh lining
Sole	Light weight PU with special formulated Rubber outsole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Dual Density Air PU foam. Superior cushioning and support.

• KPR SLIP RESISTANCE TEST RESULTS

		Coefficient of Friction	
		Requirement	KPR M-sole Results*
SRC (SRA +SRB)	SRA Eurotile 2 with NaLS	Forward Flat Slip 0.32	0.34-0.36
		Forward Heel Slip 0.28	0.28-0.31
	SRB Stainless Steel with Glycerine	Forward Flat Slip 0.18	0.18-0.21
		Forward Heel Slip 0.13	0.13-0.14

*Slip resistance testing conducted by Intertek (2013)

www.kprsafety.com

