

## Features

- 3 Pin mini-DIN
- Unterminated
- PVC Outer Sheath Material
- Cable Type Mini DIN

## RS PRO Male Moulded Plug to Free End DIN Cable Assembly

RS Stock No.: 463-489



RS PRO Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO Moulded Plug is designed for convenient inter-connection between equipment employing mini-DIN and other types of connector, these leads are fully screened and PVC sheathed. Supplied in 2 metre lengths, the cables are available as either a moulded plug to a moulded socket, or a moulded plug to an unterminated "Free End".


## General Specifications

Temperature Range	-25°C to +85°C
Shell	Nickel Plated
Contacts	Gold Flash
Contact Plating	Pb/Sn, Tin or Au/Nickel
Insulator	PBT (UL94V-0)
Cable Colour	Black

## Electric Specifications

Current Rating	1A AC/DC
Insulation Resistance	50MΩMin
Voltage Rating	50V AC/DC
Withstanding Voltage	500V AC for 1 min

Dimensions: (mm)

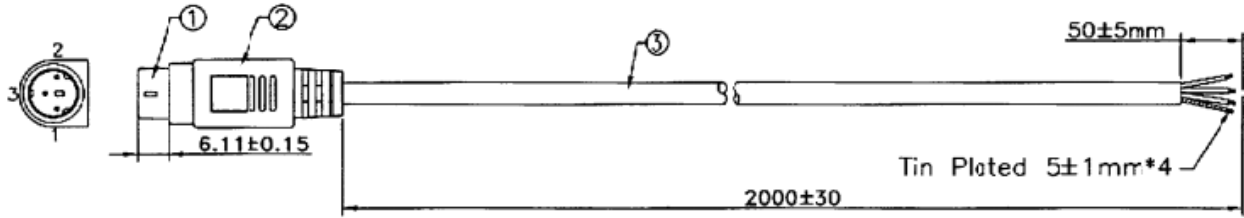

**PIN ASSIGNMENT:**

MD3	M	1	2	3	SHELL
		Black	White	Red	Drain
		NC	NC	NC	NC