




ENGLISH

Datasheet

RS PRO SLIM USB3.0 B-A FRONT MOUNTING FT CONNECTOR

Stock No: 2188303, 2188302

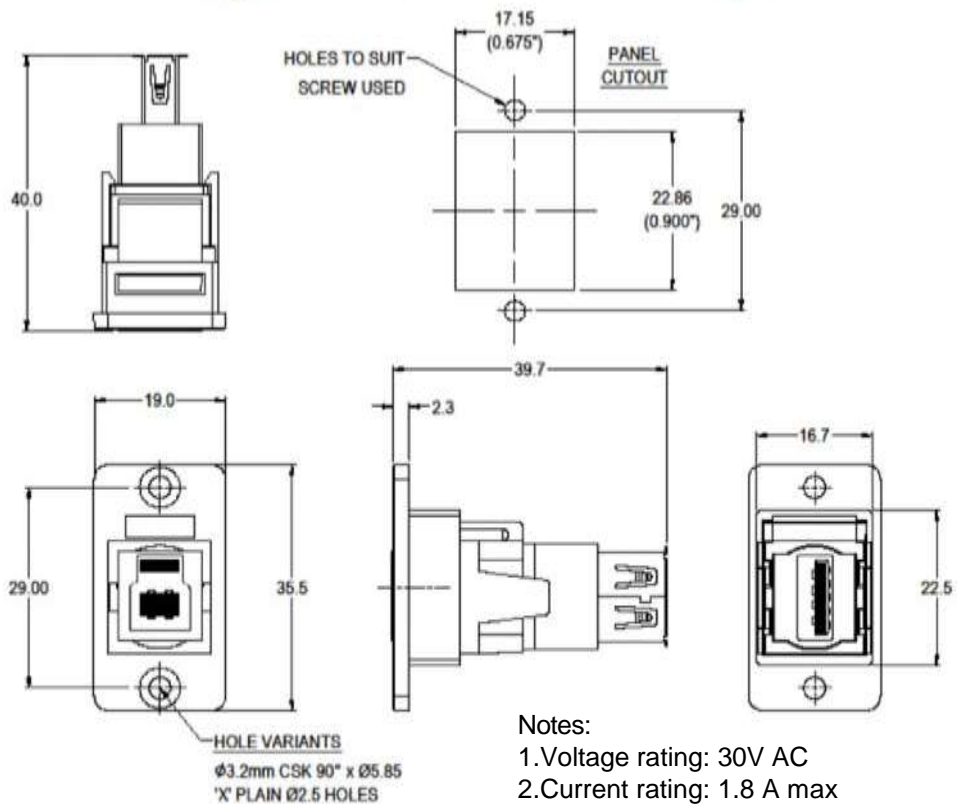

Material:
1. Insert: ABS
2. Frame: Polyamide UL94 V-
2 3. Shell: Nickel plated steel
4. Contacts: Gold Plated

Notes:

1. Voltage rating: 30V AC
2. Current rating: 1.8 A max
3. Contact resistance: 50m Ω max
4. Insulation resistance: 20M Ω min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C

rspro.com

Features & Benefits:

- Fits standard rectangular cutout.
- Various hole mounting options
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Variants:

2188302- **SLIM FM USB3.0 B-A Black plastic frame, CSK holes**

2188303- **SLIM FM USB3.0 B-A Black plastic frame, Ø2.5 PLAIN holes**



rspro.com

