


Datasheet

1/4in MONO JACK SOCKET S4, BNB BLACK

Stock Number: 913-1043

Dimensions: mm

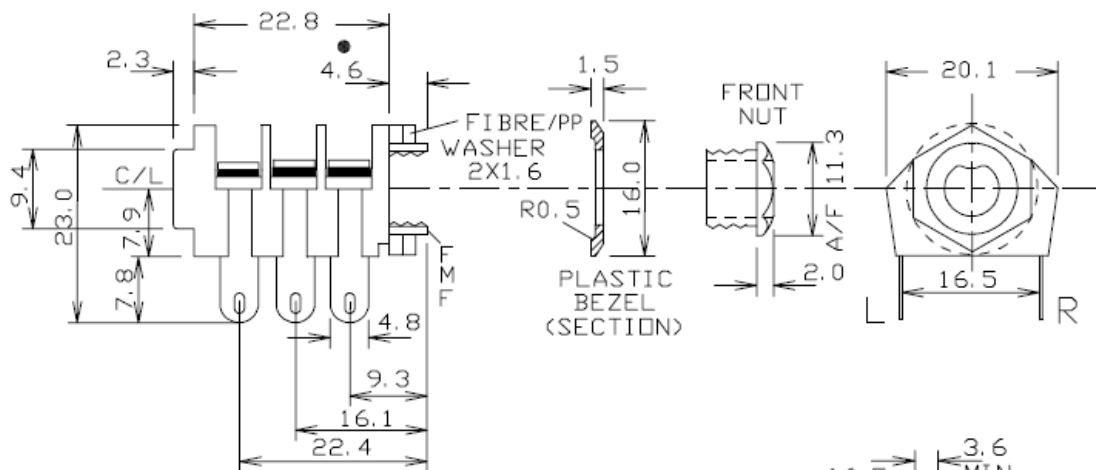

NOTE

'REVERSED CONTACT' HAS LONG CONTACTS ON L AND SHORT ON R.

FOR KINKED LEG JACK SOCKETS, USE $1.5 \pm 0.05\varnothing$ P.C.B. HOLE.


MAX PANEL THICKNESS 4.3mm

OPTION


S4P HAS COMBINED NUT & BEZEL MADE FROM PLASTIC MATT BLACK FINISH.

NOTE







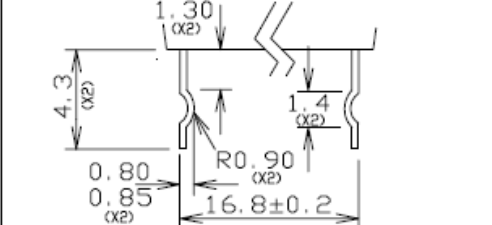


S4T JACKS HAVE ALL CONTACTS PLATED WITH LOW LOSS FINISH.

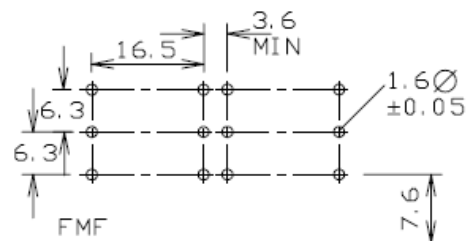

PC GRID TYPES A/S, A & B



PC GRID-TYPES C, D, E

BACK OF SOCKET ←		→ FRONT OF SOCKET		
<p>SPECIAL REVERSED CUT CONTACT</p>  <p>12.5 TO C/L</p> <p>(12.5 = SPECIAL)</p>	 <p>12.5 TO C/L</p> <p>1.3 WIDE</p> <p>3.2</p> <p>(12.5 = SPECIAL)</p>	 <p>10.0 TO C/L</p> <p>4</p> <p>3</p> <p>1.3 WIDE</p>	 <p>1.3 WIDE</p> <p>4.1</p>	 <p>4.3</p> <p>1.3 WIDE</p>
PCA/S/REV	PC TYPE A/S	PC TYPE A	PC TYPE B	PC TYPE C
 <p>10.0 TO C/L</p> <p>5.7</p> <p>PRODUCED BY CUTTING FROM A STD. SOLDER TAG TYPE</p>	 <p>1.30 (x2)</p> <p>4.3 (x2)</p> <p>0.80</p> <p>0.85 (x2)</p> <p>R0.90 (x2)</p> <p>1.4 (x2)</p> <p>16.8±0.2</p>		 <p>15mm TO C/L</p> <p>1.3 WIDE</p> <p>4.0</p>	 <p>17.5 TO C/L</p> <p>1.3 WIDE</p> <p>4.0</p>
PCA "SPIKY"	PC-C 'KINKED'		PC TYPE D	PC TYPE E

Specifications:

Material: Nylon/NIAG/Fibre/PP

Finish: As moulded/Microfinish