




Benefits

- Round and ultra slim profile
- IP40 rated, bug-proof and worry-free
- Bright & comfortable
- IP40 protection

Application



Model	Item Description	W	PF	lm	lm/W	CRI	Beam Angle	Life Span	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
MXL1075S-HC220-12W	KATIA HC220 12W 6500K IP40	12	0.9	1200	100	80	120°	40000	221*41*221	465*440*240	20
MXL1075S-HC350-24W	KATIA HC350 24W 6500K IP40	24	0.9	2400	100	80	120°	40000	350*50*350	530*365*365	10
MXL1075S-HC450-36W	KATIA HC450 36W 6500K IP40	36	0.9	3600	100	80	120°	40000	450*55*452	465*465*470	8

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White
IP	IP40
IK	IK08
Driver integrated (Yes/No)	Yes


Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	PP
Housing Material	PC


Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	25°C
Storage Environment	-25°C~50°C

Photometric Data


12W

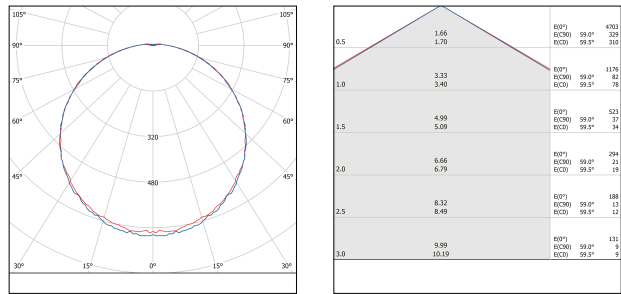


24W

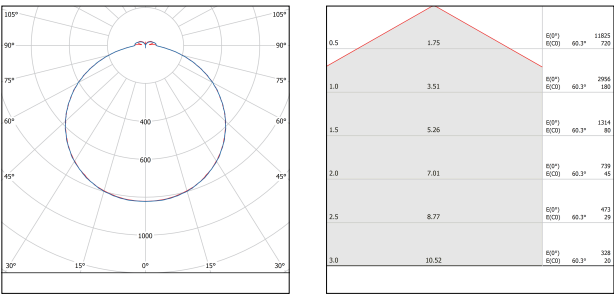

36W

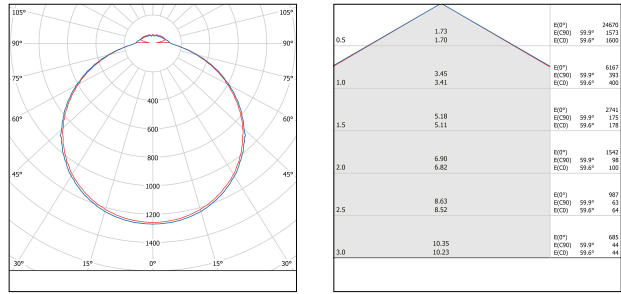

Dimensional Drawing

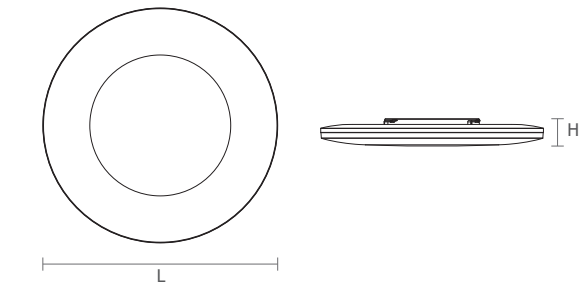

Model	Ø(mm)	H(mm)
MXL1075S-HC220-12W	220	31
MXL1075S-HC350-24W	350	35
MXL1075S-HC450-36W	450	38