



TL-D Standard Colours

TL-D 10W/54-765 1SL/50

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Controls and Dimming	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 50% failures (nom.)	5000 h		
Light Technical		Approval and Application	
Colour Code	54-765	Energy efficiency label (EEL)	B
Lamp Luminous Flux 25°C EL (Nom)	390 lm	Mercury (Hg) content (nom.)	8.0 mg
Colour Designation	Cool Daylight	Product Data	
Lumen maintenance 2,000 hours (nom.)	85 %	Full product code	871150064130465
Lumen maintenance 5,000 hours (nom.)	80 %	Order product name	TL-D 10W/54-765 1SL/50
Colour Temperature, horizontal (Nom)	6200 K	EAN/UPC – product	8711500641304
Colour Rendering Index,horiz (Nom)	75	Order code	928024005436
Operating and Electrical		SAP numerator – quantity per pack	1
Power (Rated) (Nom)	10.0 W	Numerator – packs per outer box	50
Lamp current (nom.)	0.230 A	Material no. (12 NC)	928024005436
Voltage (Nom)	46 V	SAP net weight (piece)	0.045 kg
		ILCOS code	FD-10/62/2A-E-G13

TL-D Standard Colours


Dimensional drawing




TL-D 10W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 10W/54-765 1SL/50	28 mm	331.5 mm	338.6 mm	336.2 mm	345.7 mm

Photometric data

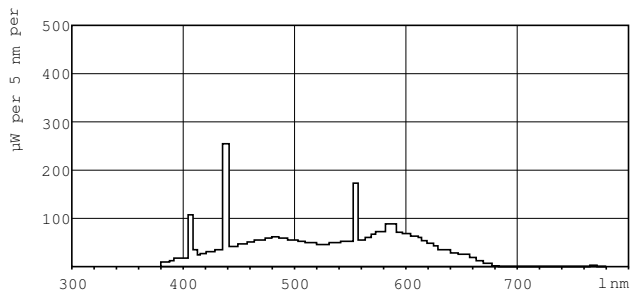


Lightcolour /54-765

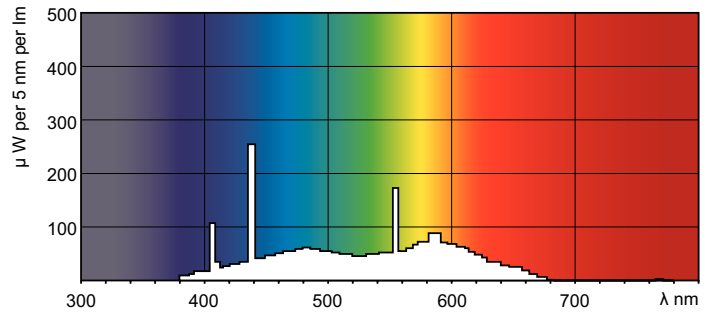


Lightcolour /54-765

Lifetime

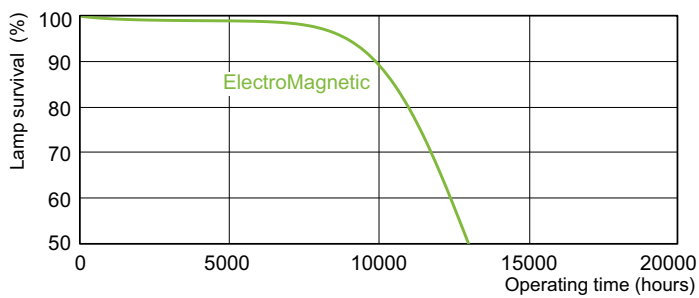

LDLE_TL-DSTD_0001-Life expectancy diagram

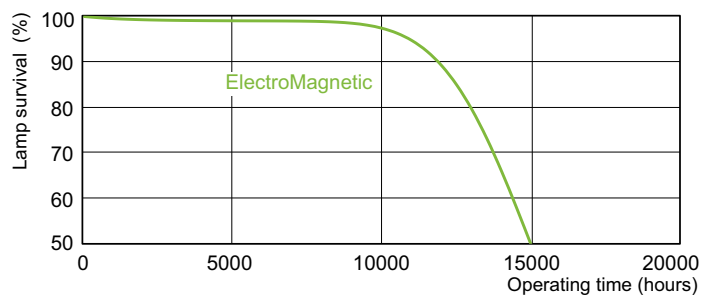

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime



LDLM_TL-DSTD_0001-Lumen maintenance diagram

