




Benefits

- Outstanding waterproof design, adaptable in rough environment
- Up to 90% energy saving comparing to conventional wall lamp
- Impact resistant, long life, low maintenance cost

Application

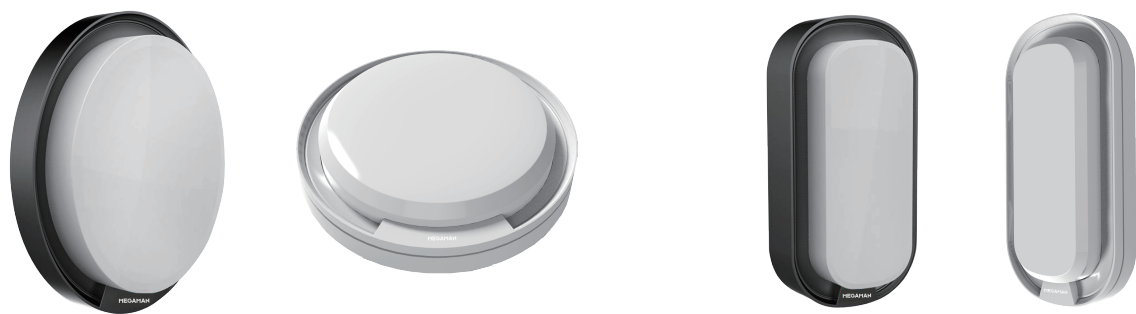

Model	Item Description	W	PF	lm	lm/W	CRI	Beam Angle	Life (h)	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
ZDL1110-CF-BH-15W	SIGV1 BH 15W RE100 3000K BK	15	0.5	1350	90	80	120°	30000	105*47*210	445*255*230	20
ZDL1110-CF-BH-15W	SIGV1 BH 15W RE100 3000K WH	15	0.5	1350	90	80	120°	30000	105*47*210	445*255*230	20
ZDL1110-CF-BH-15W	SIGV1 BH 15W RE100 4000K BK	15	0.5	1350	90	80	120°	30000	105*47*210	445*255*230	20
ZDL1110-CF-BH-15W	SIGV1 BH 15W RE100 4000K WH	15	0.5	1350	90	80	120°	30000	105*47*210	445*255*230	20
ZDL1110-Y-BH-15W	SIGV1 BH 15W R180 3000K BK	15	0.5	1350	90	80	120°	30000	185*51*185	390*280*390	20
ZDL1110-Y-BH-15W	SIGV1 BH 15W R180 3000K WH	15	0.5	1350	90	80	120°	30000	185*51*185	390*280*390	20
ZDL1110-Y-BH-15W	SIGV1 BH 15W R180 4000K BK	15	0.5	1350	90	80	120°	30000	185*51*185	390*280*390	20
ZDL1110-Y-BH-20W	SIGV1 BH 20W R220 3000K BK	20	0.5	1800	90	80	120°	30000	225*55*225	580*245*245	10
ZDL1110-Y-BH-20W	SIGV1 BH 20W R220 4000K BK	20	0.5	1800	90	80	120°	30000	225*55*225	580*245*245	10
ZDL1110-Y-BH-20W	SIGV1 BH 20W R220 6500K BK	20	0.5	1800	90	80	120°	30000	225*55*225	580*245*245	10

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	<6
Dimmable	No
Housing Colour	White/Black
IP	IP65
IK	IK08
Driver integrated (Yes/No)	Yes


Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	PC
Housing Material	PS


Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	25°C
Storage Environment	-25°C~50°C

Photometric Data


15W

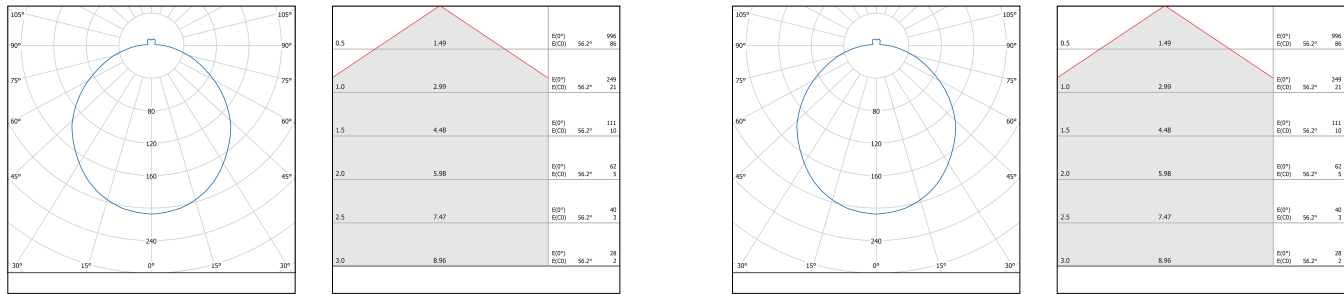

Dimensional Drawing



Model	Ø(mm)	H(mm)
ZDL1110-Y-BH-15W	180	46
ZDL1110-Y-BH-20W	220	50



Model	L(mm)	W(mm)	H(mm)
ZDL1110-CF-BH-15W	100	200	42