


AURA LIGHT

Sabine Marcelis



Type
Suspension Light

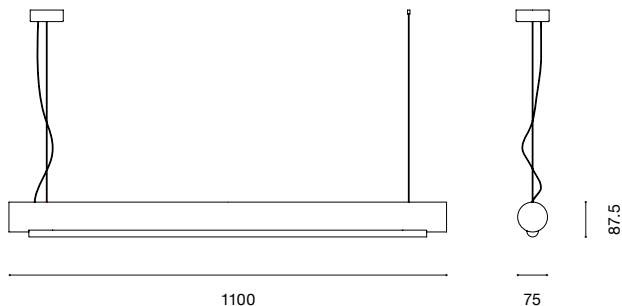

Design
2020
Designer
Sabine Marcelis

Harnessing Marcelis' expertise in colour, the suspended cylinder bar of the Aura Light can stand alone or work as part of a grouping. Over a metre in length, the design is made from a bio-epoxy resin, created using by-products from farming. A replaceable LED tube is housed within the coloured resin case, with the light travelling through the material to create a soft, warm glow.

Dimensions S1: L1100mm x D75mm H87.5mm	Weight 5kg (approx.)	Cable Length L2000mm	Materials Polyester resin, powder-coated steel fixing, steel suspension cable	Lamp Colour <div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: #f1c40f; margin-right: 5px;"></div> Apricot </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 15px; height: 15px; background-color: #e74c3c; margin-right: 5px;"></div> Rose </div>
Cable Colour				
<div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: #ccc; margin-right: 5px;"></div> Clear </div>				

Wiring Type Mains voltage	Supply Voltage 220/240V AC, 50-60Hz 110/120V AC, 60Hz	Bulb Colour Temperature 2700k	Bulb Lamp Supplied S1: Linestra DIM 220/240V LED 15W, S14s Satco S8190 110/120V LED 13W, S14s
Types of Insulation Class II (2)	Dimmable Luminaire compatible with dimming devices.	Bulb Life Expectancy 20,000 hours	
	Ingress Protection Rating IP20	Bulb Lumens Max 1055lm (15W)	

Packaging Dimensions S1: L1120mm x D100mm x H100mm (approx.)	Packaging Type Cardboard, acid free tissue paper, crushed kraft paper	Care & Maintenance Clean with a soft dry cloth. Do not use alcohol, polishes, abrasives or any solvents to clean the product, as they may damage the material. This product is for indoor use only. Keep out of direct sunlight. Protect against exposure to heat above 60°C. Not recommended for continuous use over 16h.	Notes CE Marked
	Weight 6kg (approx.)		