

# LOUVRE LIGHT


## Klauser & Carpenter



**Type**  
Suspension Light

**Design**  
2008  
**Designer**  
Klauser & Carpenter

Referencing window blinds and ‘muscle cars’, Klauser & Carpenter’s surprisingly understated Louvre design uses layers of pressed aluminium to create a glare-free, ambient light.

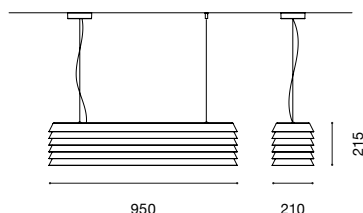


**Dimensions**  
L950mm × D210mm × H215mm

**Cable Length**  
L2000mm

**Materials**  
Anodised aluminium, polycarbonate diffuser, powder-coated aluminium and steel fixings, steel suspension cable.

**Lamp Colour**  
 Anodised Black

**Cable Colour**  
 Clear

**Weight**  
6.8kg

**Wiring Type**  
Mains voltage

**Supply Voltage**  
220/240Vac, 50-60Hz  
110/120Vac, 60Hz

**Colour Temperature**  
3000k

**Bulb Fitting**  
G5 – 220/240  
G5 – 110/120V

**Types of Insulation**  
Class II (2)

**Dimmable**  
Luminaire compatible with dimming devices  
Notes: professional installer to advice on suitable dimmer and bulb combination.

**Life Expectancy**  
30,000 hours

**Bulb Lamp Supplied**  
220/240V:  
2× T5-HO linear fluorescent 39W (electronic ballast)  
110/120V:  
2× T5-HO linear fluorescent 39W (electronic ballast)

**Ingress Protection Rating**  
IP20

**Lumens**  
3500 lm

**Packaging Dimensions**  
Base: L1230mm × D430mm × H540mm

**Weight**  
35kg

**Notes**  
CE mark

**Care & Maintenance**  
Clean electrical parts with a soft dry cloth only.  
To clean the glass use a slightly damp microfibre cloth with a mild detergent.  
To clean the lamp please use a soft, damp cloth or a duster, avoiding any abrasives or solvents.

**Packaging Type**  
Crate

# LOUVRE LIGHT


## Klauser & Carpenter



**Type**  
Suspension Light

**Design**  
2008  
**Designer**  
Klauser & Carpenter

Referencing window blinds and ‘muscle cars’, Klauser & Carpenter’s surprisingly understated Louvre design uses layers of pressed aluminium to create a glare-free, ambient light.

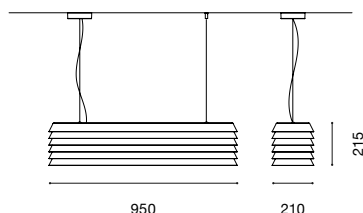

**Dimensions**  
L950mm x D210mm x H215mm

**Cable Length**  
L2000mm

**Weight**  
6.8kg

**Materials**  
Anodised aluminium, polycarbonate diffuser, powder-coated aluminium and steel fixings, steel suspension cable.

**Lamp Colour**  
 Anodised Bronze 220V  
 Anodised Bronze 110V

**Cable Colour**  
 Clear  
 Black

**Wiring Type**  
Mains voltage

**Supply Voltage**  
220/240Vac, 50-60Hz  
110/120Vac, 50-60Hz

**Colour Temperature**  
3000k

**Bulb Fitting**  
Integrated LED strips

**Types of Insulation**  
Class I (1)

**Dimmable**  
220V: integrated dimmer DALI control technology  
110V: Integrated dimmer 0-10 Vdc  
Notes: Luminare compatible with dimming devices, professional installer to advise on suitable dimmer

**Life Expectancy**  
50,000 hours

**Bulb Lamp Supplied**  
220/240V and 110/120V:  
2x Integrated LED strips direct 42W  
2x Integrated LED strips indirect 26W

**Ingress Protection Rating**  
IP20

**Lumens**  
Direct 3600 lm  
Indirect 2200 lm

**Packaging Dimensions**  
Base: L1230mm x D430mm x H540mm

**Weight**  
35kg

**Notes**  
CE mark

**Care & Maintenance**  
Clean electrical parts with a soft dry cloth only.  
To clean the glass use a slightly damp microfibre cloth with a mild detergent.  
To clean the lamp please use a soft, damp cloth or a duster, avoiding any abrasives or solvents.

**Packaging Type**  
Crate

