

High Voltage Chips Capacitors

C Series



FEATURES

- Multilayer chip ceramic capacitors
- Size 1515 to 16080
- NPO, C4xx and X7R dielectrics
- Capacitance range: 10pf to 39 μ F
- Voltage range: 200 V_{DC} to 10,000 V_{DC}

PHYSICAL CHARACTERISTICS

CONSTRUCTION

- C Series: Unleaded chip capacitors for surface mounting with optional tinning.
- P, PL, L models: DIL leaded uncoated chip capacitors for surface mounting recommended to eliminate thermomechanical stresses.
- N, NU models: DIL leaded chip capacitors for through-hole circuits (N: varnished chips, NU: uncoated chips).
- R, RU models: Ribbon leaded chip capacitors for surface mounting (R: varnished chips, RU: uncoated chips) recommended to eliminate thermomechanical stresses.

MARKING (On request on unleaded chips)

Series, capacitance value, tolerance, rated voltage clear or coded, date code.

ELECTRICAL SPECIFICATIONS

Dielectric	NPO	C4xx	X7R
Dielectric code	1	4	2
Maximum $\Delta C/^{\circ}C$ over temperature range without voltage	NA	NA	$\pm 15\%$
Temperature coefficient	$[0 \pm 30]$ ppm/ $^{\circ}C$	$[-2,200 \pm 500]$ ppm/ $^{\circ}C$	NA
Aging	None	None	$\leq 2.5\%$ per decade hour
Operating temperature	$-55^{\circ}C$ to $+125^{\circ}C$		
Rated voltage (U _{RC})	200 V _{DC} to 10,000 V _{DC}	200 V _{DC} to 5,000 V _{DC}	200 V _{DC} to 10,000 V _{DC}
Dielectric withstanding voltage	2.5 U _{RC} for U _{RC} $\leq$ 500 V _{DC}	2.5 U _{RC} for U _{RC} = 200 V _{DC}	2.5 U _{RC} for U _{RC} = 200 V _{DC}
	1.6 U _{RC} for U _{RC} $\geq$ 1,000 V _{DC}	2 U _{RC} for U _{RC} = 500 V _{DC}	2 U _{RC} for U _{RC} = 500 V _{DC}
	Extended range: 2 U _{RC} for U _{RC} $\leq$ 500 V _{DC}	1.5 U _{RC} for U _{RC} = 1,000 V _{DC}	1.5 U _{RC} for U _{RC} = 1,000 V _{DC}
	1.3 U _{RC} for U _{RC} $\geq$ 1,000 V _{DC}	1.4 U _{RC} for U _{RC} $>$ 1,000 V _{DC}	1.2 U _{RC} for U _{RC} $>$ 1,000 V _{DC}
Capacitance	at 1MHz for C $\leq$ 1,000pf at 1kHz for C $>$ 1,000pf	at 1kHz	at 1kHz
	$\leq 0.015 (150/C + 7)\%$ at 1MHz for C $\leq$ 50pf		
	Dissipation factor	$\leq 0.15\%$ at 1kHz	$\leq 2.5\%$ at 1kHz
	$\leq 0.15\%$ at 1MHz for 50pf $<$ C $\leq$ 1,000pf $\leq 0.15\%$ at 1kHz for C $>$ 1,000pf		
Insulation resistance at 25 $^{\circ}C$ under U _{RC} for U _{RC} $\leq$ 500V _{DC} under 500V _{DC} for U _{RC} $>$ 500V _{DC}	$\geq 100,000 M\Omega$ for C $\leq$ 10nf $\geq 1,000 M\Omega \mu F$ for C $>$ 10nf	$\geq 20,000 M\Omega$ for C $\leq$ 25nf $\geq 500 M\Omega \mu F$ for C $>$ 25nf	


HIGH VOLTAGE

C	2	80	C	P	M	F	1 μ F	10%	200V	S12	T5
Series	Dielectric	Exxelia size code	Termination (Bare chips only)	Leads style + finishing (Leaded chips only)	Marking	Quality level	Capacitance	Tolerance	Rated voltage	Packaging	Reliability level
C = High voltage chip capacitor	1 = NPO 2 = X7R 4 = C4xx	78 = 1515 79 = 1812 90 = 1825 80 = 2220 91 = 2225 81 = 2825 82 = 3333 83 = 4040 84 = 5440 89 = 5550 85 = 6560 87 = 11283 88 = 16080	W = RoHS compliant For all sizes - Ag/Pd/Pt W Ag/Pd/Pt Q wAg QW Ag From 1812 to 3333 sizes - Ag/Pd/Pt W Ag/Pd/Pt H Ag/Pd/Pt + dipped Sn/Pb 60/40 HW Ag/Pd/Pt + dipped Sn E Ni* + dipped Sn/Pb 60/40 C Ni** + electrolytic Sn/Pb 95/5 CW Ni + electrolytic Sn D Ag + Ni*** + electrolytic Sn/Pb 60/40 - G Ni + electrolytic Gold - From 1812 to 4040 sizes YC Ag + Polymer + Ni + Sn/Pb 95/5 YCW Ag + Polymer + Ni + Sn YD Ag + Polymer + Ni + Sn/Pb 60/40 - YG Ag + Polymer + Ni + Au YGW Ag + Polymer + Ni + Au * Only 2225 to 16080 sizes ** Only 1515 to 2220 sizes (other sizes on demand) *** Only 1515 (other sizes on demand)	P PW - RoHS PL PLW - RoHS L LW - RoHS R RW - RoHS RU RUW - RoHS N NW - RoHS NU NUW - RoHS not available for sizes 1515 and 1812	Only for unleaded chips (Leaded chips are always marked). - = no marking M = Marking: For sizes 1515 - 1825: Cap. value. For other sizes: EFD, Series, cap. value, tolerance, rated voltage, date code.	- = standard quality level F = Hi-Rel quality: screening in accordance with Exxelia specification	Capacitance value in clear	For NPO dielectric: $\pm 1\%$ $\pm 2\%$ $\pm 5\%$ $\pm 10\%$ $\pm 20\%$ For C4xx dielectric: $\pm 2\%$ $\pm 5\%$ $\pm 10\%$ $\pm 20\%$ For X7R dielectric: $\pm 10\%$ $\pm 20\%$	200V 500V 1,000V 1,500V 2,000V 3,000V 4,000V 5,000V 7,500V 10,000V Intermediary and higher voltages available on request.	- = Exxelia packaging (leaded chips: thermoformed packaging) Only available for unleaded chips: S12 = Super 12 reel BA = Tray package (non oriented chips) BAO = Tray package (oriented chips) See page 13	For F parts only. Acc. to Exxelia spec. - T5 T6 See page 15

C Series

High Voltage Chips Capacitors

DIMENSIONS in inches (mm)

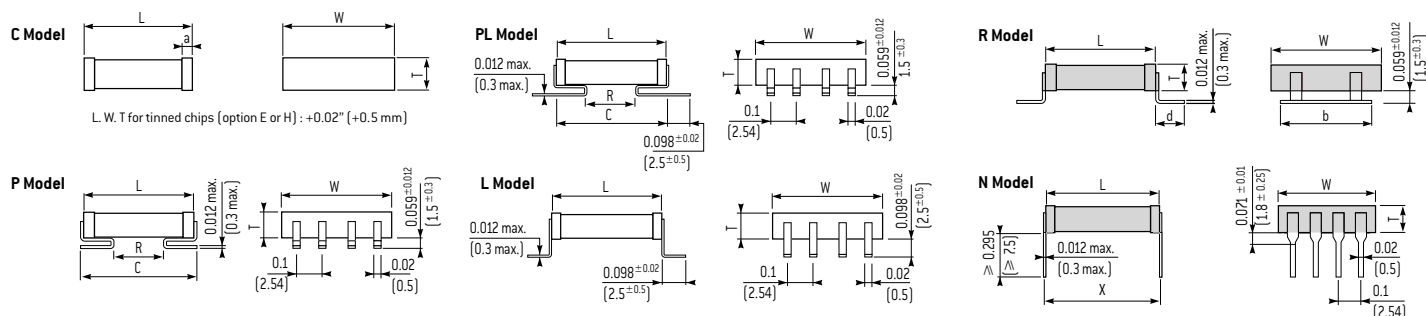

STANDARD RATINGS

		Size	1515	1812			1825			2220			2225			2825			3333			
		Exxelia size code	78	79			90			80			91			81			82			
Dimensions inches (mm)	L*	0.15 ± 0.015 (3.8 ± 0.38)	0.177 ± 0.020 (4.5 ± 0.5)			0.177 ± 0.020 (4.5 ± 0.5)			0.224 ± 0.020 (5.7 ± 0.5)			0.224 ± 0.020 (5.7 ± 0.5)			0.276 ± 0.020 (7 ± 0.5)			0.331 ± 0.020 (8.4 ± 0.5)				
	W*	0.15 ± 0.015 (3.8 ± 0.38)	0.126 ± 0.020 (3.2 ± 0.5)			0.250 ± 0.020 (6.35 ± 0.5)			0.197 ± 0.020 (5.0 ± 0.5)			0.250 ± 0.020 (6.35 ± 0.5)			0.250 ± 0.020 (6.35 ± 0.5)			0.331 ± 0.020 (8.4 ± 0.5)				
	a	0.012 min (0.3 min)	0.024 ± 0.020 (0.6 ± 0.5)			0.024 ± 0.020 (0.6 ± 0.5)			0.028 ± 0.020 (0.7 ± 0.5)			0.028 ± 0.020 (0.7 ± 0.5)			0.039 ± 0.020 (1 ± 0.5)			0.039 ± 0.020 (1 ± 0.5)				
	d	- -	- -			0.087 ± 0.008 (2.2 ± 0.2)			0.087 ± 0.008 (2.2 ± 0.2)			0.087 ± 0.008 (2.2 ± 0.2)			0.087 ± 0.008 (2.2 ± 0.2)			0.138 ± 0.008 (3.5 ± 0.2)				
	b	- -	- -			0.197 ± 0.020 (5 ± 0.5)			0.197 ± 0.020 (5 ± 0.5)			0.197 ± 0.020 (5 ± 0.5)			0.197 ± 0.020 (5 ± 0.5)			0.315 ± 0.020 (8 ± 0.5)				
	R min.	- -	- -			0.066 (1.7)			0.098 (2.5)			0.098 (2.5)			0.137 (3.5)			0.177 (4.5)				
	C max.	- -	- -			0.229 (5.8)			0.276 (7)			0.276 (7)			0.315 (8)			0.355 (9)				
	X	- -	- -			0.2 ± 0.020 (5.08 ± 0.5)			0.248 ± 0.020 (6.3 ± 0.5)			0.248 ± 0.020 (6.3 ± 0.5)			0.300 ± 0.020 (7.62 ± 0.5)			0.350 ± 0.020 (8.9 ± 0.5)				
	Leads per side	-				2			2			2			2			3				
	T max.*	0.154 (3.9)	0.138 (3.5)			0.138 (3.5)			0.2kV up to 3kV: 0.119 [3] 4kV-5kV: 0.150 [3.8]			0.2kV up to 3kV: 0.158 [4] 4kV-5kV: 0.197 [5]			0.2kV up to 3kV: 0.158 [4] 4kV: 0.197 [5] 5kV: 0.237 [6]			0.2kV up to 3kV: 0.158 [4] 4kV: 0.197 [5] 5kV: 0.237 [6]				
Dielectric			NPO	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R
Exxelia ceramic code			1	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2
Min. Capacitance value			12pF	120pF	10pF	27pF	100pF	10pF	33pF	150pF	10pF	33pF	150pF	15pF	47pF	150pF	18pF	56pF	150pF	33pF	82pF	330pF
Rated voltage (U _{RC})	0.2kV	Standard	-	-	5.6nF	120nF	220nF	12nF	220nF	470nF	12nF	220nF	390nF	15nF	330nF	560nF	18nF	390nF	820nF	33nF	680nF	1.5μF
		Extended	-	-	18nF	-	470nF	27nF	-	-	22nF	-	1μF	39nF	-	-	56nF	-	1.8μF	100nF	-	2.7μF
	0.5kV	Standard	-	-	3.3nF	22nF	47nF	6.8nF	47nF	100nF	5.6nF	47nF	100nF	6.8nF	68nF	150nF	8.2nF	82nF	220nF	22nF	120nF	390nF
		Extended	-	-	10nF	39nF	150nF	18nF	68nF	-	18nF	68nF	270nF	22nF	100nF	-	27nF	120nF	560nF	68nF	220nF	1μF
	1kV	Standard	-	-	1.8nF	6.8nF	15nF	2.7nF	12nF	22nF	2.2nF	12nF	22nF	3.3nF	18nF	33nF	3.9nF	22nF	47nF	10nF	39nF	68nF
		Extended	820pF	12nF	5.6nF	10nF	27nF	8.2nF	15nF	-	6.8nF	15nF	56nF	10nF	22nF	-	12nF	27nF	120nF	33nF	56nF	220nF
	1.5kV	Standard	-	-	820pF	2.7nF	5.6nF	1.2nF	5.6nF	10nF	1.5nF	5.6nF	10nF	2.2nF	8.2nF	15nF	2.7nF	10nF	18nF	4.7nF	18nF	33nF
		Extended	-	-	1.5nF	3.9nF	12nF	2.2nF	8.2nF	-	2.2nF	6.8nF	22nF	3.3nF	12nF	-	4.7nF	15nF	47nF	8.2nF	27nF	82nF
	2kV	Standard	-	-	390pF	1.5nF	3.3nF	680pF	2.7nF	5.6nF	470pF	2.7nF	5.6nF	820pF	4.7nF	6.8nF	1.2nF	5.6nF	10nF	3.3nF	10nF	18nF
		Extended	470pF	2.7nF	820pF	2.2nF	5.6nF	1.2nF	3.9nF	-	1nF	3.9nF	12nF	1.8nF	6.8nF	-	2.7nF	8.2nF	27nF	6.8nF	15nF	47nF
	3kV	Standard	-	-	180pF	680pF	1.2nF	180pF	1.2nF	2.2nF	220pF	1.2nF	2.2nF	330pF	1.8nF	3.3nF	470pF	2.2nF	3.9nF	820pF	3.9nF	6.8nF
		Extended	220pF	1nF	390pF	1nF	2.7nF	680pF	1.8nF	-	470pF	1.8nF	4.7nF	820pF	2.7nF	-	1nF	3.3nF	12nF	1.8nF	5.6nF	22nF
	4kV	Standard	-	-	100pF	330pF	680pF	120pF	680pF	1nF	150pF	820pF	1.2nF	220pF	1.2nF	1.8nF	390pF	1.5nF	2.7nF	680pF	3.3nF	4.7nF
		Extended	150pF	470pF	220pF	560pF	-	330pF	1nF	-	330pF	1.2nF	2.2nF	680pF	1.8nF	-	820pF	2.2nF	4.7nF	1.5nF	4.7nF	10nF
	5kV	Standard	-	-	-	-	-	-	-	-	100pF	560pF	820pF	150pF	820pF	1nF	270pF	1nF	1.8nF	470pF	2.2nF	3.3nF
		Extended	-	-	-	-	-	-	-	-	220pF	820pF	1.5nF	320pF	1.2nF	-	560pF	1.5nF	3.3nF	1nF	2.7nF	6.8nF

High Voltage Chips Capacitors

C Series

STANDARD RATINGS

		Size	4040			5440			5550			6560			11283			16080		
		Exxelia size code	83			84			89			85			87			88		
Dimensions inches (mm)	L*	0.400 ± 0.039 (10.16 ± 1)			0.539 ± 0.039 (13.7 ± 1)			0.551 ± 0.039 (14 ± 1)			0.650 ± 0.039 (16.5 ± 1)			1.122 ± 0.039 (28.5 ± 1)			1.555 ± 0.039 (39.5 ± 1)			
	W*	0.400 ± 0.039 (10.16 ± 1)			0.400 ± 0.039 (10.16 ± 1)			0.500 ± 0.039 (12.7 ± 1)			0.598 ± 0.039 (15.2 ± 1)			0.827 ± 0.039 (21 ± 1)			0.756 ± 0.039 (19.2 ± 1)			
	a	0.059 ± 0.020 (1.5 ± 0.5)			0.059 ± 0.020 (1.5 ± 0.5)			0.059 ± 0.020 (1.5 ± 0.5)			0.059 ± 0.020 (1.5 ± 0.5)			0.059 ± 0.020 (1.5 ± 0.5)			0.059 ± 0.020 (1.5 ± 0.5)			
	d	0.138 ± 0.008 (3.5 ± 0.2)			0.138 ± 0.008 (3.5 ± 0.2)			0.138 ± 0.008 (3.5 ± 0.2)			0.138 ± 0.008 (3.5 ± 0.2)			0.138 ± 0.008 (3.5 ± 0.2)			0.138 ± 0.008 (3.5 ± 0.2)			
	b	0.315 ± 0.020 (8 ± 0.5)			0.315 ± 0.020 (8 ± 0.5)			0.315 ± 0.020 (8 ± 0.5)			0.591 ± 0.020 (15 ± 0.5)			0.591 ± 0.020 (15 ± 0.5)			0.591 ± 0.020 (15 ± 0.5)			
	R min.	0.275 (7)			0.393 (10)			0.393 (10)			0.511 (13)			0.984 (25)			1.377 (35)			
	C max.	0.473 (12)			0.611 (15.5)			0.63 (16)			0.729 (18.5)			1.26 (32)			1.654 (42)			
	X	0.45 ± 0.020 (11.43 ± 0.5)			0.551 ± 0.020 (14 ± 0.5)			0.563 ± 0.020 (14.3 ± 0.5)			0.7 ± 0.020 (17.78 ± 0.5)			1.15 ± 0.020 (29.21 ± 0.5)			1.6 ± 0.020 (40.64 ± 0.5)			
	Leads per side	4			4			5			6			6			6			
	T max.*	0.2kV up to 3kV: 0.158 (4) 4kV: 0.197 (5) 5kV up to 10kV: 0.237 (6)			0.2kV up to 3kV: 0.158 (4) 4kV: 0.197 (5) 5kV up to 10kV: 0.237 (6)			0.2kV up to 3kV: 0.158 (4) 4kV: 0.197 (5) 5kV up to 10kV: 0.237 (6)			0.2kV up to 3kV: 0.158 (4) 4kV: 0.197 (5) 5kV up to 10kV: 0.237 (6)			0.2kV up to 3kV: 0.158 (4) 4kV: 0.197 (5) 5kV: 0.237 (6) 7.5kV up to 10kV: 0.256 (6.5)			0.2kV up to 3kV: 0.158 (4) 4kV: 0.197 (5) 5kV: 0.236 (6) 7.5kV up to 10kV: 0.256 (6.5)			
Dielectric		NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	NPO	C4xx	X7R	
Exxelia ceramic code		1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	
Min. Capacitance value		10pF	180pF	270pF	22pF	270pF	390pF	27pF	390pF	560pF	47pF	470pF	1nF	120pF	1nF	2.2nF	150pF	1.8nF	2.7nF	
Rated voltage (U _{RC})	0.2kV	Standard	56nF	1.2μF	2.7μF	82nF	1.5μF	3.9μF	100nF	1.8μF	4.7μF	180nF	2.7μF	6.8μF	330nF	6.8μF	12μF	390nF	8.2μF	15μF
		Extended	180nF	-	5.6μF	270nF	-	6.8μF	220nF	-	8.2μF	560nF	-	12μF	1μF	-	33μF	1.2μF	-	39μF
	0.5kV	Standard	33nF	270nF	680nF	47nF	330nF	1μF	56nF	390nF	1.2μF	82nF	680nF	1.8μF	150nF	1.5μF	3.9μF	270nF	1.8μF	4.7μF
		Extended	100nF	390nF	1.5μF	150nF	560nF	2.2μF	150nF	680nF	2.7μF	270nF	1μF	3.9μF	470nF	2.2μF	10μF	820nF	2.7μF	12μF
	1kV	Standard	15nF	82nF	150nF	22nF	82nF	220nF	33nF	120nF	270nF	39nF	220nF	390nF	82nF	560nF	1μF	150nF	680nF	1.2μF
		Extended	47nF	120nF	390nF	68nF	120nF	560nF	82nF	220nF	560nF	120nF	330nF	1μF	270nF	680nF	2.7μF	470nF	1μF	3.3μF
	1.5kV	Standard	8.2nF	39nF	82nF	12nF	39nF	100nF	15nF	68nF	150nF	22nF	100nF	180nF	47nF	220nF	470nF	68nF	330nF	560nF
		Extended	18nF	56nF	180nF	22nF	56nF	220nF	33nF	100nF	330nF	47nF	150nF	470nF	100nF	330nF	1.2μF	150nF	470nF	1.5μF
	2kV	Standard	4.7nF	18nF	33nF	6.8nF	22nF	68nF	8.2nF	39nF	68nF	12nF	56nF	100nF	27nF	120nF	220nF	39nF	180nF	330nF
		Extended	10nF	27nF	100nF	15nF	33nF	150nF	18nF	56nF	150nF	27nF	82nF	220nF	56nF	180nF	560nF	82nF	270nF	820nF
	3kV	Standard	1.5nF	8.2nF	15nF	2.7nF	10nF	27nF	3.3nF	18nF	27nF	4.7nF	27nF	39nF	12nF	56nF	100nF	15nF	68nF	120nF
		Extended	3.3nF	12nF	39nF	5.6nF	15nF	56nF	10nF	22nF	68nF	10nF	39nF	100nF	27nF	82nF	270nF	33nF	100nF	330nF
	4kV	Standard	1.2nF	6.8nF	10nF	2.2nF	6.8nF	15nF	2.7nF	12nF	18nF	3.9nF	18nF	27nF	10nF	39nF	68nF	12nF	47nF	100nF
		Extended	2.7nF	10nF	18nF	4.7nF	10nF	27nF	6.8nF	18nF	39nF	8.2nF	27nF	47nF	22nF	56nF	120nF	27nF	82nF	150nF
	5kV	Standard	1nF	4.7nF	5.6nF	1.8nF	4.7nF	10nF	1.8nF	8.2nF	12nF	3.3nF	12nF	18nF	8.2nF	27nF	56nF	10nF	33nF	68nF
		Extended	2.2nF	6.8nF	15nF	3.9nF	6.8nF	22nF	4.7nF	12nF	27nF	6.8nF	18nF	39nF	15nF	39nF	82nF	18nF	47nF	100nF
	7.5kV	Standard	150pF	-	1.5nF	270pF	-	2.7nF	470pF	-	3.3nF	560pF	-	6.8nF	1.5nF	-	18nF	2.2nF	-	27nF
		Extended	330pF	-	3.3nF	560pF	-	5.6nF	1.2nF	-	6.8nF	1.2nF	-	12nF	3.3nF	-	33nF	4.7nF	-	47nF
	10kV	Standard	100pF	-	680pF	180pF	-	1.2nF	270pF	-	1.5nF	390pF	-	3.3nF	1nF	-	8.2nF	1.5nF	-	12nF
		Extended	220pF	-	1.8nF	390pF	-	3.3nF	680pF	-	3.9nF	820pF	-	6.8nF	2.2nF	-	15nF	3.3nF	-	27nF

* For E, H and HW: add +0.020 inch (+0.5 mm) to L, W and T dimensions.

The high voltage parts may require varnish or encapsulation to prevent surface arcing.

Available capacitance values:

NPO, C4xx dielectrics: E6, E12, E24 (see page 14). Specific values upon request.

X7R dielectric: E6, E12 in standard (see page 14). Specific values upon request.

The above table defines the standard products, other components may be built upon request.

TCF Series

High Voltage Conformal Coated Leded Capacitors



According to

Available space ranges:
consult our detail
specifications

FEATURES

- Multilayer chip ceramic capacitors
- NPO, C4xx and X7R dielectrics
- Capacitance range: 10pf to 39μF
- Voltage range: 200 V_{DC} to 10,000 V_{DC}

PHYSICAL CHARACTERISTICS

CONSTRUCTION

Epoxy conformal coated radial leaded capacitors suited to through-hole circuits.

MARKING

Series, capacitance value, tolerance, rated voltage, date code.

ELECTRICAL SPECIFICATIONS

DIELECTRIC	NPO	C4xx	X7R
Dielectric code	1	4	2
Maximum $\Delta C/^\circ C$ over temperature range without voltage	NA	NA	$\pm 15\%$
Temperature coefficient	(0 $\pm$ 30) ppm/ $^\circ C$	(-2,200 $\pm$ 500) ppm/ $^\circ C$	NA
Aging	None	None	$\leq 2.5\%$ per decade hour
Operating temperature	-55 $^\circ C$ to +125 $^\circ C$		
Rated voltage (U _{RC})	200 V _{DC} to 10,000 V _{DC}	200 V _{DC} to 5,000 V _{DC}	200 V _{DC} to 10,000 V _{DC}
Dielectric withstanding voltage	2.5 U _{RC} for U _{RC} $\leq$ 500 V _{DC} 1.6 U _{RC} for U _{RC} $\geq$ 1,000 V _{DC}	2.5 U _{RC} for U _{RC} = 200 V _{DC} 2 U _{RC} for U _{RC} = 500 V _{DC} 1.5 U _{RC} for U _{RC} = 1,000 V _{DC} 1.4 U _{RC} for U _{RC} > 1,000 V _{DC}	2.5 U _{RC} for U _{RC} = 200 V _{DC} 2 U _{RC} for U _{RC} = 500 V _{DC} 1.5 U _{RC} for U _{RC} = 1,000 V _{DC} 1.2 U _{RC} for U _{RC} > 1,000 V _{DC}
	Extended range: 2 U _{RC} for U _{RC} $\leq$ 500 V _{DC} 1.3 U _{RC} for U _{RC} $\geq$ 1,000 V _{DC}	Extended range: 1.5 U _{RC} for U _{RC} $\leq$ 500 V _{DC} 1.2 U _{RC} for U _{RC} $\geq$ 1,000 V _{DC}	Extended range: 1.5 U _{RC} for U _{RC} $\leq$ 500 V _{DC} 1.2 U _{RC} for U _{RC} $\geq$ 1,000 V _{DC}
Capacitance	at 1MHz for C $\leq$ 1,000pf at 1kHz for C > 1,000pf	at 1kHz	at 1kHz
Dissipation factor	≤ 0.015 (150/ $^\circ C$ + 7)% at 1MHz for C $\leq$ 50pf		
	$\leq 0.15\%$ at 1MHz for 50pf < C $\leq$ 1,000pf	$\leq 0.10\%$ at 1 kHz	$\leq 2.5\%$ at 1 kHz
	$\leq 0.15\%$ at 1 kHz for C > 1,000pf		
Insulation resistance at 25 $^\circ C$ under U _{RC} for U _{RC} $\leq$ 500 V under 500 V _{DC} for U _{RC} > 500 V	$\geq 100,000 M\Omega$ for C $\leq$ 10nf $\geq 1,000 M\Omega \cdot \mu F$ for C > 10nf	$\geq 20,000 M\Omega$ for C $\leq$ 25nf $\geq 500 M\Omega \cdot \mu F$ for C > 25nf	
Voltage proof body insulation	under U _{RC} for U _{RC} $\leq$ 1,250 V _{DC} under 1,300 V _{DC} for U _{RC} > 1,250 V _{DC}		

HOW TO ORDER

TCF	1	82	W	F	680pF	10%	4,000 V	B
Series	Dielectric code	Exxelia size code	RoHS compliant	Quality level	Capacitance	Tolerance	Rated voltage	Reliability level
TCF = Conformal coated radial leaded capacitor	1 = NPO 2 = X7R 4 = C4xx	79 90 80 91 81 82 83 84 89 85 87 88	- = No RoHS W = RoHS compliant	- = standard quality level F = Hi-Rel quality: screening in accordance with Exxelia specification	Capacitance value in clear	NPO dielectric: $\pm 1\%$ $\pm 2\%$ $\pm 5\%$ $\pm 10\%$ $\pm 20\%$ C4xx dielectric: $\pm 2\%$ $\pm 5\%$ $\pm 10\%$ $\pm 20\%$ X7R dielectric: $\pm 10\%$ $\pm 20\%$	200 V 500 V 1,000 V 1,500 V 2,000 V 3,000 V 4,000 V 5,000 V 7,500 V 10,000 V Intermediary and higher voltages available: contact your sales representative.	For F parts only. Acc. to Exxelia spec. - T5 T6 See page 15

Selection Guide

Main Characteristic	Model	Size range	Dielectric	Voltage range	Capacitance range	Temperature range	Coating					Leads				Mounting		Main Applications	Page
							Uncoated	Varnished	Conformal coated	Molded	Self protected	DIL	Ribbon	Axial	Radial	SMD	Through hole		
HIGH CAPACITANCE	R SERIES (CHIPS) High Capacitance Chips Capacitors 	2225 to 45107	X7R	50V to 500V	47nF to 27µF	-55°C to +125°C	•									•		Switch Mode Power Supply, filtering, smoothing, decoupling. • aerospace • space • defence	79
	R SERIES (LEADED) Radial Leaded Conformal Coated Capacitors 	-	X7R	50V to 500V	47nF to 27µF	-55°C to +125°C		•							•		•		83
	TEF SERIES Radial Leaded Conformal Coated Capacitors 	-	NPO	63V to 500V	10nF to 680nF	-55°C to +125°C			•						•		•		86
	SV / SC SERIES High Capacitance Stacked Capacitors 	2225 to 125205	X7R	50V to 500V	47nF to 390µF	-55°C to +125°C	•	•				•	•			•	•		87
	CNC3X SERIES High Capacitance Stacked Capacitors 	2220 to 4040	X7R	16V to 25V	1.2µF to 68µF	-55°C to +125°C	•	•				•				•	•		94
	CEC5X SERIES High Capacitance Stacked Capacitors 	3033 to 80150	NPO	63V to 500V	10nF to 6.8µF	-55°C to +125°C	•	•				•				•	•		96
	TEP / TEV SERIES High Capacitance Stacked Capacitors 	-	NPO	63V to 500V	10nF to 6.8µF	-55°C to +125°C		•							•		•		99
HIGH TEMPERATURE	TCN8X SERIES High Capacitance Molded Stacked Capacitors 	-	X7R	63V to 500V	0.47µF to 120µF	-55°C to +125°C				•					•		•	Oil drilling, motor control, braking systems.	101
	CE / CN SERIES High Temperature Chips Capacitors 	0402 to 3040	NPO X7R	16V to 100V	1pF to 8.2µF	-55°C to +250°C	•									•			106
	SCT SERIES High Temperature Stacked Capacitors 	2225 to 125205	X7R	50V to 500V	47nF to 390µF	-55°C to +215°C	•	•				•				•	•		108
	TCE / TCN MOLDED SERIES HT High Temperature Molded Capacitors 	-	NPO X7R	16V to 100V	1pF to 10µF	-55°C to +220°C				•				•	•		•		113
	TCE / TCN SELF-PROTECTED SERIES High Temperature Self-Protected Capacitors 	-	NPO X7R	25V to 500V	10pF to 3.9µF	-55°C to +250°C					•			•	•		•		115
FEED-THRU	TCH SERIES High Temperature High Voltage Capacitors 	-	NPO X7R	200V to 10kV	10pF to 15µF	-55°C to +250°C	•								•		•	Very low ESL, miniaturisation	117
	TBC SERIES Discoidal Capacitors 	-	NPO X7R	25V to 1kV	10pF to 12µF	-55°C to +125°C	•									•			121
	BPM SERIES Planar Array 	-	X7R	25V to 200V	330pF to 68nF	-55°C to +125°C	•									•		Very low ESL, miniaturisation	123

Selection Guide


Main Characteristic	Model	Size range	Dielectric	Voltage range	Capacitance range	Temperature range	Coating					Leads				Mounting		Main Applications	Page
							Uncoated	Varnished	Conformal coated	Molded	Self protected	DIL	Ribbon	Axial	Radial	SMD	Through hole		
HIGH Q	XBL SERIES Broadband 	0402	X7R	16V	100nF	-55°C to +125°C	•									•		DC Blocking, Coupling, Bypassing	144
	UBL SERIES Broadband 	0402	X7R	16V	100nF	-55°C to +125°C	•									•			146
	UBZ SERIES Broadband 	0201	X5R X6T	10V	100nF	-55°C to +105°C	•									•			148
	CH SERIES Classic HiQ 	0505 1111	P100	50V to 1.5kV	0.1pF to 1nF	-55°C to +175°C	•						•		•	•		Cellular base station amplifier, MRI.	150
	SH SERIES Super HiQ 	0402 to 1210	NPO	25V to 1.5kV	0.2pF to 1nF	-55°C to +150°C	•						•		•	•		Cellular base station equipment Broadband Point to point/ multi-point radios RF generators	153
	SHD / SHR SERIES Reverse Geometry 	0709 0711	NPO	500V	0.5pF to 100pF	-55°C to +175°C	•									•			156
	NHB SERIES High Self Resonant Frequency 	1111	NPO	500V	0.3pF to 100pF	-55°C to +175°C	•									•			158
	CP SERIES High Power 	2225 4040	P100	200V to 7kV	1pF to 10nF	-55°C to +125°C	•		•				•	•	•	•	•	RF power amplifier Plasma chamber MRI coils	160
	CL SERIES High Power 	2225 to 7065	NPO	200V to 7kV	1pF to 10nF	-55°C to +125°C	•		•				•	•	•	•	•	RF power amplifier Plasma chamber MRI coils	164

ADDITIONAL AVAILABLE RANGES (consult our website)

STANDARD	TCE1X Series 	-	NPO	63V to 100V	0.5pF to 10nF	-55°C to +125°C				•						•		Precision, stability, decoupling	-
	TCN19 Series 	-	2C1	63V to 250V	10pF to 1μF	-55°C to +125°C				•						•		Decoupling	-
	TCN3X Series 	-	2C1	50V to 100V	100pF to 1.8μF	-55°C to +125°C				•						•			-
	LA6 Series 	-	2C1	25V to 63V	100pF to 1μF	-55°C to +125°C				•						•			-
HIGH VOLT.	H Series 	0805 to 6560	NPO X7R	1kV to 10kV	2pF to 390nF	-55°C to +125°C	•		•							•	•	Power supply, voltage multiplier, radars.	-
HIGH CAPACITANCE	CNC5X Series 	3033 to 80150	X7R	63V to 500V	0.1μF to 180μF	-55°C to +125°C	•	•				•				•	•	Switch Mode Power Supply, filtering, smoothing, decoupling. • aerospace • space • defence	-
	CNC8X Series (chips) 	3033 to 33110	X7R	63V to 400V	47nF to 27μF	-55°C to +125°C	•									•			-
	CNC8X Series (DIL) 	3333 to 80150	X7R	63V to 400V	47nF to 180μF	-55°C to +125°C	•	•				•				•	•		-
	TCP / TCV8X Series 	3333 to 80150	X7R	63V to 400V	47nF to 180μF	-55°C to +125°C		•								•	•		-
	TCP / TCV5X Series 	3033 to 80150	X7R	63V to 500V	0.1μF to 180μF	-55°C to +125°C		•								•	•		-
	TCF Series 	-	X7R	63V to 500V	0.1μF to 18μF	-55°C to +125°C			•							•	•		-
HIGH TEMP.	CNC25X Series 	3033 to 5550	X7R	50V	1μF to 33μF	-55°C to +200°C	•	•				•				•	•	Oil drilling, motor control, braking systems.	-
HIGH Q	CNW Series 	-	X7R	100V to 300V	10nF to 1μF	-55°C to +125°C	•						•	•		•	•	Power amplifier	-
	SPT519 / CAW CEW Series 	-	NPO	100V to 300V	10nF to 1μF	-55°C to +125°C	•	•					•	•		•	•		-


Ceramic Capacitors Technology

MLCC STRUCTURE

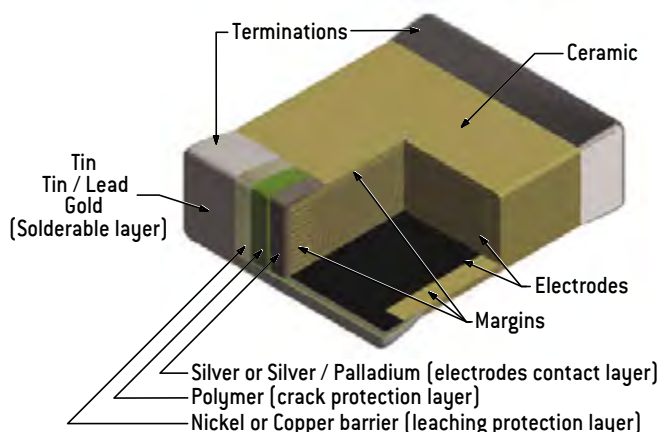

EQUIVALENT CIRCUIT

Capacitor is a complex component combining resistive, inductive and capacitive phenomena. A simplified schematic for the equivalent circuit is:

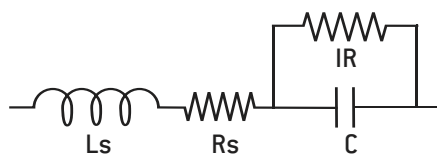

DIELECTRIC CHARACTERISTICS

Insulation Resistance (IR) is the resistance measured under DC voltage across the terminals of the capacitor and consists principally of the parallel resistance shown in the equivalent circuit. As capacitance values and hence the area of dielectric increases, the IR decreases and hence the product $[C \times IR]$ is often specified in $\Omega \cdot F$ or $M\Omega \cdot \mu F$.

The Equivalent Series Resistance (ESR) is the sum of the resistive terms which generate heating when capacitor is used under AC voltage at a given frequency f .

Dissipation factor (DF) is the ration of the apparent power input will turn to heat in the capacitor:

$$DF = 2\pi f C ESR$$

When a capacitor works under AC voltage, **heat power loss (P)**, expressed in Watt, is equal to:

$$P = 2\pi f C V_{rms}^2 DF$$

The series inductance (Ls) is due to the currents running through the electrodes. It can distort the operation of the capacitor at high frequency where the **impedance (Z)** is given as:

$$Z = R_s + j [L_s \omega - 1/(C \omega)] \text{ with } \omega = 2\pi f$$

When frequency rises, the capacitive component of capacitors is gradually canceled up to the resonance frequency, where :

$$Z = R_s \text{ and } L_s C \omega^2 = 1$$

Above this frequency the capacitor behaves like an inductor.

	P100	NPO	N2200 [C4xx]	BX	2C1	X7R
Dielectric material	Porcelain	Magnesium titanate or Neodynum baryum titanate	Barium zirconate titanate	Baryum titanate [BaTiO ₃]		
Dielectric constant	15 – 18	20 – 85	450	2,000 – 5,000		
Electrode technology	PME (Precious Metal Electrodes): Ag/Pd					
Capacitance variation between –55°C and +125/°C without DC voltage	{100±30}ppm/°C	{0±30}ppm/°C	{–2,200±500}ppm/°C	±15%	±20%	±15%
Capacitance variation between –55°C and +125/°C with DC rated voltage			0 -15%	15% –25%	20% –30%	Not applicable
Piezo-electric effect	None		None	Yes		
Dielectric absorption	None		Few %	Few %		
Thermal shock sensitive	+		+	++		

Ceramic Capacitors Technology


MANUFACTURING STEPS

SLIP CASTING




A slurry, a mix of ceramic powder, binder and solvents, is poured onto conveyor belt inside a drying oven, resulting in a dry ceramic sheet.

ELECTRODE SCREEN PRINTING

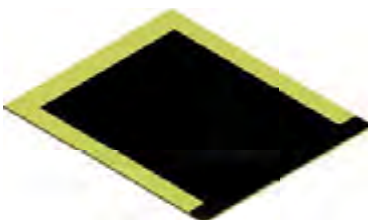


The electrode ink, made from a metal powder mixed with solvents, is printed onto the ceramic sheets using a screen printing process.

STACKING




The sheets with electrode printed are stacked to create a multilayer structure.

TERMINATIONS




Each terminal of the capacitor is dipped in the termination ink, mix of metal powder, solvents and glass frit and the parts are fired in an oven.

SINTERING




The parts are sintered in an oven with a precise temperature profile which is very important to the characteristics of the capacitors.

PRESSING




Pressure is applied to the stack to fuse all the separate layers, this created a monolithic structure.

TERMINATIONS PLATING

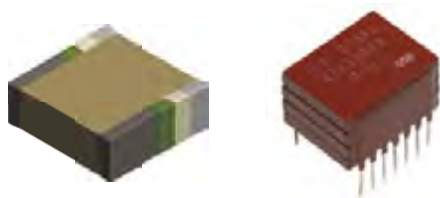

Stacking + leads soldering + encapsulation
[see pages 10-11]

FINAL TESTING



PACKAGING



User Guide

SMD TERMINATIONS

NON RoHS COMPLIANT	Code	RoHS COMPLIANT	Code	Recommended mounting process							Storage (months)*
				Magnetic	Epoxy bonding	Iron soldering	Wave soldering	Vapor phase soldering	Infrared soldering	Wire bonding	
Ag	Q	Ag	QW / P	No	•	•	•	•			18
Ag/Pd/Pt	-	Ag/Pd/Pt	W / A	No	•	•	•				24
Ag/Pd/Pt + dipped Sn/Pb 60/40	H	Ag/Pd/Pt + dipped Sn	HW	No		•					24
Ag + Ni + electrolytic Sn/Pb 95/5	C	Ag + Ni + electrolytic Sn	CW / S	Yes		•	•	•	•		18
Ag + Ni + electrolytic Sn/Pb 60/40	D	-	-	Yes		•	•	•	•		18
-	-	Ag + Cu + electrolytic Sn	C**	No		•	•	•	•		18
Ag + Ni + dipped Sn/Pb 60/40	E	-	-	Yes		•	•				24
Ag + Ni + Au	G	Ag + Ni + Au	GW	Yes	•	•	•	•	•	•	36
Ag + Polymer + Ni + Sn/Pb 95/5	YC	Ag + Polymer + Ni + Sn	YCW	Yes		•	•	•	•		18
Ag + Polymer + Ni + Sn/Pb 60/40	YD	-	-	Yes		•	•	•	•		18
Ag + Polymer + Ni + Au	YG	Ag + Polymer + Ni + Au	YGW	Yes	•	•	•	•	•	•	36

Nickel (Ni) or Copper (Cu) barriers amplify thermal shock and are not recommended for chip sizes larger than 3030.

* Storage must be in a dry environment at a temperature of 20°C with a relative humidity below 50%, or preferably in a package enclosing a desiccant.

** Non magnetic chips series only.

SMD ENVIRONMENTAL TESTS

Ceramic chip capacitors for SMD are designed to meet test requirements of **CECC 32100** and **NF C 93133** standards as specified below in compliance with **NF C 20700** and **IEC 68** standards:

- Solderability: **NF C 20758**, 260°C, bath 62/36/2.
- Adherence: 5N force.
- Vibration fatigue test: **NF C 20706**, 20 g, 10 Hz to 2,000 Hz, 12 cycles of 20 minutes each.
- Rapid temperature change: **NF C 20714**, -55°C to + 125°C, 5 cycles.
- Combined climatic test: **IEC 68-2-38**.
- Damp heat: **NF C 20703**, 93 %, H.R., 40°C.
- Endurance test: 1,000 hours, 1.5 U_{RC}, 125°C.

STORAGE OF CHIP CAPACITORS

TINNED OR NON TINNED CHIP CAPACITORS

Storage must be in a dry environment at a temperature of 20°C with a relative humidity below 50 %, or preferably in a packaging enclosing a desiccant.

STORAGE IN INDUSTRIAL ENVIRONMENT:

- 2 years for tin dipped chip capacitors,
- 18 months for tin electroplated chip capacitors,
- 2 years for non tinned chip capacitors,
- 3 years for gold plated chip capacitors.

STORAGE IN CONTROLLED NEUTRAL NITROGEN ENVIRONMENT:

- 4 years for tin dipped or electroplated chip capacitors,
- 4 years for non tinned chip capacitors,
- 5 years for gold plated chip capacitors.

Storage duration should be considered from delivery date and not from batch manufacture date. The tests carried out at final acceptance stage (solderability, susceptibility to solder heat) enable to assess the compatibility to surface mounting of the chips.

User Guide

LEAD STYLES

SURFACE MOUNTING

DIL LEADS

P style



PL style



L style




J style



RIBBON LEADS

Micro-strip (type 1)
Short Micro-strip (type 1S)

Axial (Type 2)



Radial (Type 3)



R style



RX style



RJ style



Please contact Exxelia sales for any lead configuration not shown.


TROUGH-HOLE MOUNTING

AXIAL AND RADIAL

Radial leads (Type 6)



Radial leads (4 leads)



Axial leads (Type 7)



DIL leads: N style



ENCAPSULATION STYLES

Ceramic encapsulation
(selfprotected)

Varnish



Conformal coating




Molding



User Guide

SOLDERING ADVICES FOR REFLOW SOLDERING

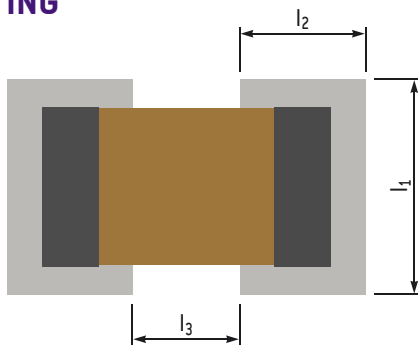

Large chips above size 2225 are not recommended to be mounted on epoxy board due to thermal expansion coefficient mismatch between ceramic capacitor and epoxy. Where larger sizes are required, it is recommended to use components with ribbon or other adapted leads so as to absorb thermo-mechanical strains.

Dimensions in inches (in mm)	Reflow soldering						Wave soldering					
	l ₁		l ₂		l ₃		l ₁		l ₂		l ₃	
0402	0.043	(1.1)	0.035	(0.9)	0.012	(0.3)	0.043	(1.1)	0.047	(1.2)	0.012	(0.3)
0403	0.055	(1.4)	0.035	(0.9)	0.012	(0.3)	0.055	(1.4)	0.047	(1.2)	0.012	(0.3)
0504	0.063	(1.6)	0.051	(1.3)	0.016	(0.4)	0.063	(1.6)	0.063	(1.6)	0.016	(0.4)
0603	0.055	(1.4)	0.059	(1.5)	0.02	(0.5)	0.055	(1.4)	0.071	(1.8)	0.02	(0.5)
0805	0.073	(1.85)	0.065	(1.65)	0.024	(0.6)	0.073	(1.85)	0.077	(1.95)	0.024	(0.6)
0907	0.094	(2.4)	0.065	(1.65)	0.035	(0.9)	0.094	(2.4)	0.077	(1.95)	0.035	(0.9)
1005	0.073	(1.85)	0.067	(1.7)	0.039	(1)	0.073	(1.85)	0.079	(2)	0.039	(1)
1206	0.083	(2.1)	0.067	(1.7)	0.059	(1.5)	0.083	(2.1)	0.079	(2)	0.059	(1.5)
1210	0.118	(3)	0.069	(1.75)	0.059	(1.5)	0.118	(3)	0.081	(2.05)	0.059	(1.5)
1605	0.073	(1.85)	0.071	(1.8)	0.087	(2.2)	0.073	(1.85)	0.083	(2.1)	0.087	(2.2)
1806	0.087	(2.2)	0.073	(1.85)	0.102	(2.6)	0.087	(2.2)	0.085	(2.15)	0.102	(2.6)
1812	0.152	(3.85)	0.073	(1.85)	0.102	(2.6)	0.152	(3.85)	0.085	(2.15)	0.102	(2.6)
1825	0.281	(7.15)	0.073	(1.85)	0.102	(2.6)	0.281	(7.15)	0.085	(2.15)	0.102	(2.6)
2210	0.13	(3.3)	0.079	(2)	0.146	(3.7)	0.13	(3.3)	0.091	(2.3)	0.146	(3.7)
2220	0.228	(5.8)	0.079	(2)	0.146	(3.7)	0.228	(5.8)	0.091	(2.3)	0.146	(3.7)
2225	0.281	(7.15)	0.079	(2)	0.146	(3.7)	0.281	(7.15)	0.091	(2.3)	0.146	(3.7)

RECOMMENDED FOOTPRINT FOR SMD CAPACITORS


Ceramic is by nature a material which is sensitive both thermally and mechanically. Stresses caused by the physical and thermal properties of the capacitors, substrates and solders are attenuated by the leads.

Wave soldering is unsuitable for sizes larger than 2220 and for the higher ends of capacitance ranges due to possible thermal shock (capacitance values given upon request).


Infrared and vapor phase reflow, are preferred for high reliability applications as inherent thermo-mechanical strains are lower than those inherent to wave soldering.

Whatever the soldering process is, it is highly recommended to apply a thermal cycle, see hereafter our recommended soldering profile:


RECOMMENDED VAPOR PHASE REFLOW PROFILE

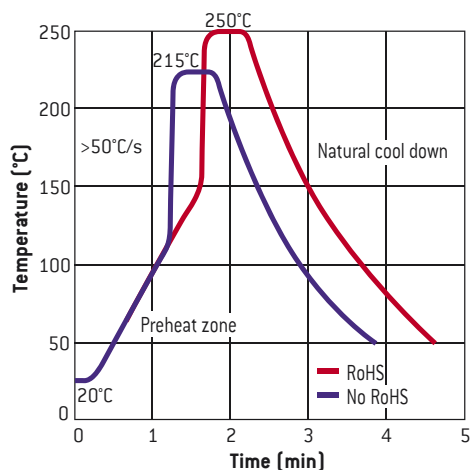

RECOMMENDED IR REFLOW PROFILE

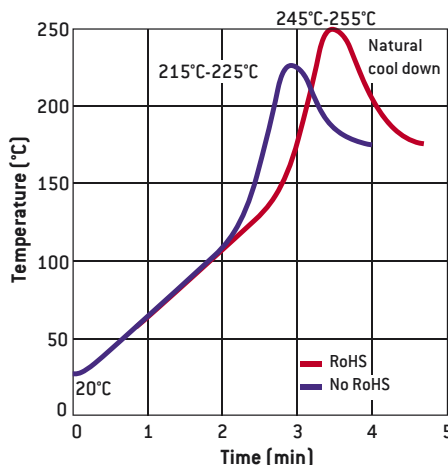

RECOMMENDED WAVE SOLDERING PROFILE

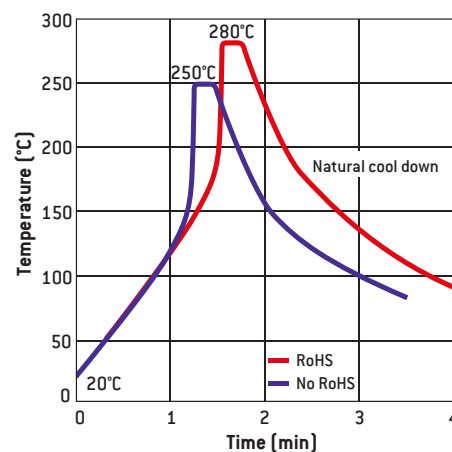

SOLDERING ADVICES FOR IRON SOLDERING

Attachment with a soldering iron is discouraged due to ceramic brittleness and the process control limitations. In the event that a soldering iron must be used, the following precautions should be observed:

- Use a substrate with chip footprints big enough to allow putting side by side one end of the capacitor and the iron tip without any contact between this tip and the component,
- place the capacitor on this footprint,

- heat the substrate until the capacitor's temperature reaches 150°C minimum (preheating step, maximum 1°C per second),
- place the hot iron tip (a flat tip is preferred) on the footprint **without touching the capacitor**. Use a regulated iron with a 30 watts maximum power. The recommended temperature of the iron is 270 ±10°C. The temperature gap between the capacitor and the iron tip must not exceed 120°C,

User Guide

- leave the tip on the footprint for a few seconds in order to increase locally the footprint's temperature,
- use a cored wire solder and put it down on the iron tip. In a preferred way use Sn/Pb/Ag 62/36/2 alloy,
- wait until the solder fillet is formed on the capacitor's termination,
- take away iron and wire solder,
- wait a few minutes so that the substrate and capacitor come back down to

the preheating temperature,

- solder the second termination using the same procedure as the first,
- let the soldered component cool down slowly to avoid any thermal shock.

PACKAGING

TAPE AND REEL

The films used on the reels correspond to standard IEC 60286-3. Films are delivered on reels in compliance with document IEC 286-3 dated 1991.

Minimum quantity is 250 chips.


Maximum quantities per reel are as follows:

- Super 8 reel - Ø 180: 2,500 chips.
- Super 8 reel - Ø 330: 10,000 chips.
- Super 12 reel - Ø 180: 1,000 chips.

Reel marking complies with CECC 32100 standard:

- Model.
- Rated capacitance.
- Capacitance tolerance.
- Rated voltage.
- Batch number.


TRAY PACKAGES

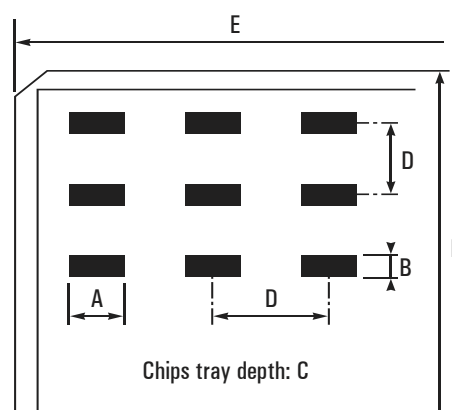

DIMENSIONAL CHARACTERISTICS OF CHIPS TRAY PACKAGES

Sizes	Nr. of chips/ package	Oriented chips	Dimensions in inches (in mm)				
			A	B	C	D	E
0402	100	No	0.112 (0.302)		0.065 (1.65)	0.167 (4.24)	2 (50.8)
0403	100	No	0.112 (0.302)		0.065 (1.65)	0.167 (4.24)	2 (50.8)
0504	100	Yes	0.059 (1.5)	0.045 (1.14)	0.035 (0.89)	0.167 (4.24)	2 (50.8)
0603	340	Yes	0.1 (2.54)	0.06 (1.52)	0.045 (1.14)	0.167 (4.24)	2 (50.8)
0805	100	Yes	0.1 (2.54)	0.06 (1.52)	0.045 (1.14)	0.167 (4.24)	2 (50.8)
1206	100	No	0.14 (3.56)	0.14 (3.56)	0.06 (1.52)	0.167 (4.24)	2 (50.8)
1210	100	Yes	0.14 (3.56)	0.14 (3.56)	0.06 (1.52)	0.167 (4.24)	2 (50.8)
1812	100	No	0.25 (6.35)	0.25 (6.35)	0.13 (3.3)	0.345 (8.76)	4 (101.6)
2220	25	Yes	0.24 (6.1)	0.265 (6.73)	0.07 (1.78)	0.345 (8.76)	2 (50.8)
	100	Yes	0.25 (6.35)	0.25 (6.35)	0.13 (3.3)	0.345 (8.76)	4 (101.6)
	25	Yes	0.24 (6.1)	0.265 (6.73)	0.07 (1.78)	0.345 (8.76)	2 (50.8)

HIGH Q CAPACITORS TAPE AND REEL PACKAGING SPECIFICATIONS

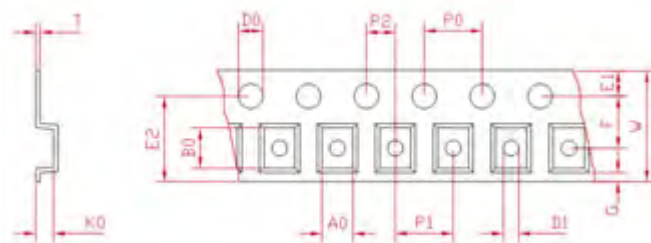

Sizes	Type (1)	W±0.3 inches (mm)	F±0.05 inches (mm)	P1±0.1 inches (mm)	T max. inches (mm)	Reel Size inches (mm)	Quantity per Reel
A (0505)	H	0,315 (8)	0,138 (3.5)	0,157 (4)	0,010 (0,25)	7,087 (180)	3'000
A (0505)	V	0,315 (8)	0,138 (3.5)	0,157 (4)	0,010 (0,25)	7,087 (180)	3'000
S (0603)	H	0,315 (8)	0,138 (3.5)	0,157 (4)	0,016 (0,4)	7,087 (180)	4'000
F (0805)	H	0,315 (8)	0,138 (3.5)	0,157 (4)	0,016 (0,4)	7,087 (180)	4'000
B (1111)	H	0,315 (8)	0,138 (3.5)	0,157 (4)	0,012 (0,3)	7,087 (180)	1'000
B (1111)	V	0,315 (8)	0,138 (3.5)	0,157 (4)	0,010 (0,25)	7,087 (180)	1'000
X (2225)	H	0,472 (12)	0,138 (5.5)	0,472 (12)	0,018 (0,45)	12,992 (330)	500
E (4040)	H	0,945 (24)	0,453±0,004 (11.5±0.1)	0,630 (16)	0,018 (0,45)	12,992 (330)	700
E (4040)	V	1,260 (32)	0,559±0,004 (14.2±0.1)	0,945 (24)	0,022 (0,55)	15 (381)	350

(1): Horizontal (H) or Vertical (V) orientation in cavities.

User Guide

EIA STANDARD CAPACITANCE VALUES

Following EIA standard, the values and multiples that are indicated in the chart below can be ordered. E48, E96 series and intermediary values are available upon request.

E6 (± 20%)	E12 (± 10%)	E24 (± 5%)
10	10	10
		11
	12	12
15	15	13
		15
	18	16
22	22	18
		20
	27	22
33	33	24
		27
	39	30
47	47	33
		36
	56	39
68	68	43
		47
	82	51
		56
		62
		68
		75
		82
		91

EIA CAPACITANCE CODE

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits are significant figures of the capacitance value and the third digit identifies the multiplier.

For capacitance value < 10pF, R designates a decimal point.

See examples below:

EIA code	Capacitance value		
	in pF	in nF	in µF
2R2	2.2	0.0022	0.0000022
6R8	6.8	0.0068	0.0000068
220	22	0.022	0.000022
470	47	0.047	0.000047
181	180	0.18	0.00018
221	220	0.22	0.00022
102	1,000	1	0.001
272	2,700	2.7	0.0027
123	12,000	12	0.012
683	68,000	68	0.068
124	120,000	120	0.12
564	560,000	560	0.56
335	3,300,000	3,300	3.3
825	8,200,000	8,200	8.2
156	15,000,000	15,000	15
686	68,000,000	68,000	68
107	100,000,000	100,000	100
227	220,000,000	220,000	220

Voltage (V)	Code	Letter code
25	250	A
40	400	B
50	500	C
63	630	D
100	101	E
200	201	G
250	251	H
400	401	K
500	501	L
1,000	102	M
2,000	202	P
3,000	302	R
4,000	402	S
5,000	502	T
7,500	752	U
10,000	103	W

PART MARKING TOLERANCE CODES

Use the following tolerance code chart for part markings:

Tolerance	Letter code
±0.25pF	CU
±0.5pF	DU
±1pF	FU
±1%	F
±2%	G
±5%	J
±10%	K
±20%	M

PART MARKING VOLTAGE CODES

Use the following voltage code chart for part markings: