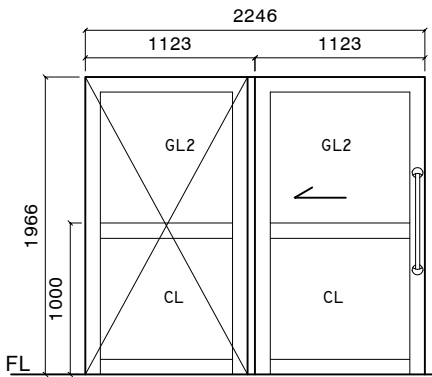
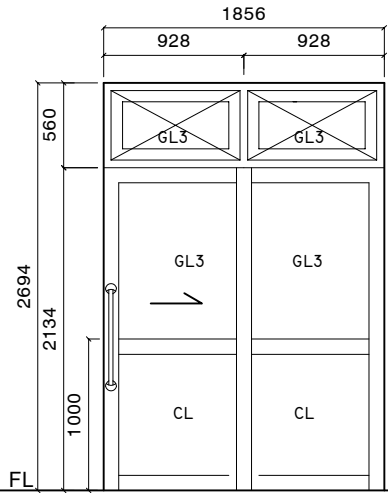
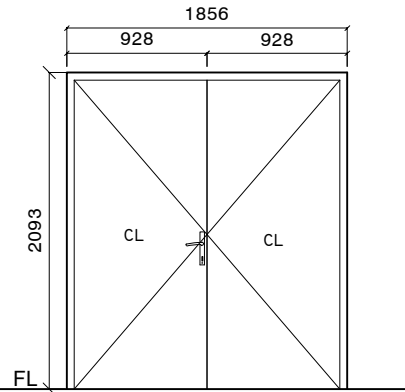
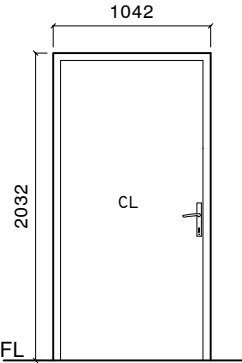
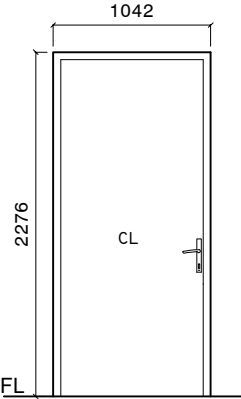



DOORS AND WINDOWS SCHEDULE

Scale 1:50

SYMBOL	D1	D2	D3	D4	D5
ELEVATION					
LOCATION	GROUND FLOOR (SPECIALIST OPD AREA)	GROUND FLOOR (EMERGENCY ROOM)	GROUND FLOOR (EXIT ROOM FOR BACK SIDE)	GROUND FLOOR (EMERGENCY ROOM TOILET)	GROUND FLOOR (LAUNDRY EXIT)
DESCRIPTION	SLIDING DOOR	SLIDING DOOR	OPENABLE DOOR	40MM THICK OPENABLE ALUMINUM FRAMED DOOR	40MM THICK OPENABLE ALUMINUM FRAMED DOOR
FRAME	ALUMINUM FRAME 80 MICRON POWDER COATED, BLACK SANDY GRAY	ALUMINUM FRAME 80 MICRON POWDER COATED, BLACK SANDY GRAY	ALUMINUM FRAME 80 MICRON POWDER COATED, BLACK SANDY GRAY	ALUMINUM FRAME 80 MICRON POWDER COATED, BLACK SANDY GRAY	ALUMINUM FRAME 80 MICRON POWDER COATED, BLACK SANDY GRAY
HARDWARE	DOOR CLOSER DEAD LOCKS BUTT HINGE STOPPER HOLDER LONG DOOR HANDLE ON BOTH SIDE, MIN 750MM	DOOR CLOSER DEAD LOCKS BUTT HINGE STOPPER HOLDER LONG DOOR HANDLE ON BOTH SIDE, MIN 750MM	DOOR CLOSER HANDLE LOCK BUTT HINGE STOPPER HOLDER KICKER	DOOR CLOSER HANDLE LOCK BUTT HINGE STOPPER HOLDER	DOOR CLOSER HANDLE LOCK BUTT HINGE STOPPER HOLDER
GLAZING	C-6MM ALL FIXED PANELS TO BE DOUBLE GLASED	C-6MM ALL FIXED PANELS TO BE DOUBLE GLASED	C-6MM ALL FIXED PANELS TO BE DOUBLE GLASED	C-6MM ALL FIXED PANELS TO BE DOUBLE GLASED	C-6MM ALL FIXED PANELS TO BE DOUBLE GLASED
NOTE	ALL MEASURMENTS TO BE CHECKED ON SITE	ALL MEASURMENTS TO BE CHECKED ON SITE	ALL MEASURMENTS TO BE CHECKED ON SITE	ALL MEASURMENTS TO BE CHECKED ON SITE	ALL MEASURMENTS TO BE CHECKED ON SITE

SYMBOL	V1
ELEVATION	
LOCATION	GROUND FLOOR
DESCRIPTION	ALUMINUM FRAMED TOP HUNG WINDOW
FRAME	120MM ALUMINUM FRAME 60-80 MICRON POWDER COATED, BLACK SANDY GRAY
HARDWARE	OPENABLE FRAME HANDLE
GLAZING	6MM THICK HEAT REFLECTIVE GLASS
NOTE	ALL MEASURMENTS TO BE CHECKED ON SITE

NOTE:
PROVIDE RC LINTEL ABOVE ALL DOOR/WINDOW/VENTILATOR UNITS
NOT FIXED TO BEAMS
AND PROVIDE RC SILL BEAMS UNDER ALL WINDOW UNITS
ALL TIMBER DOORS TO BE MADE OF TIMBER, PUTTY SMOOTHED AND
FINISHED WITH ENAMEL PAINT AS SPECIFIED

ALL MEASUREMENTS TO BE CHECKED ON SITE BEFORE FABRICATION
GL = 6MM THICK CLEAR GLASS
GLI = 6MM THICK HEAT REFLECTIVE GLASS
FG1 = 6MM THICK CLEAR GLASS
FG2 = 8MM THICK LAMINATED, CLEAR GLASS
FG3 = 8MM THICK LAMINATED, CFROSTED GLASS
CL = 6MM THICK POWDER COATED CLADDING.
TM = TREATED TIMBER FRAME WITH 6MM PLYWOOD ON
BOTH SIDE AND PAINTING.

DOOR FRAME: MINIMUM 90X50MM
DOOR PANEL FRAME: MINIMUM 100X50MM
WINDOW FRAME:MINIMUM 50X75MM
WINDOW PANEL FRAME: MINIMUM 50X100MM

ALL THE ALUMINUM PROFILE MUST BE MINIMUM 2MM THICK. AND
PROFILE MUST BE APPROVED BEFORE FABRICATION.

SHEET CONTENTS :

REVISION NOTES:

PROJECT:

RENOVATION OF K.
MAAFUSHI HOSPITAL

CLIENT:

MINISTRY OF HEALTH

LOCATION:

K. MAAFUSHI

CONTENTS: AS GIVEN

PROJECT MANAGER:

DESIGNER: ARIZ

CIV/STR. ENGINEER:

SURVEYED BY: -

DRAWN BY: ARIZ

CHECKED BY:

DATE : June 2026

SHEET NO. : 00 /00

PAPER SIZE: A3



Infrastructure Development Unit,
Ministry of Health
Roshanee Building
Sosun Magu'
Tel: 332 8887, Fax: 3328889
Email: projects@health.gov.mv